

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**


### BILL OF MATERIALS

9-4" PVC CONDUITS BRIDGE ATTACHMENT		
NO.	UNITS	ITEMS
1	1 EA	5'-5" X 1' X 6" END BENT STEEL SLEEVE, 1/4" WALL THICKNESS (JUTE, CAULKING OR MASTIC)
2	1 EA	5'-1" X 1' X 6" END BENT STEEL SLEEVE, 1/4" WALL THICKNESS (JUTE, CAULKING OR MASTIC)
3	25 EA	ITERMEDIATE HANGER (GALV. STEEL RODS AND ALL INCIDENTALS)
4	4 EA	ANCHOR HANGER WITH STOP RINGS (GALV. STEEL RODS AND ALL INCIDENTALS)
5	3 EA	ANCHOR HANGER WITH STOP RINGS AND EXPANSION COUPLINGS (GALV. STEEL RODS AND ALL INCIDENTALS)
6	108 EA	GALVANIZED STEEL INSERT FORMED INTO THE BRIDGE DECK
7	2152 LF	4" RIGID PVC CONDUIT, SCH. 40 - HEAVY WALL
8	18 EA	END PLUG (OR CAP) FOR 4" PVC CONDUIT
9	9 CY	CLASS B CONCRETE FOR ENCASING UTILITY LINES

THESE MATERIALS ARE ESTIMATED QUANTITIES ONLY AND ARE TO BE FURNISHED BY THE CONTRACTOR FOR THE ATTACHMENT TO THE PROPOSED BRIDGE

PROJECT NO. U-5839  
HAYWOOD COUNTY  
 STATION: 24+64.13 -L- POT

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

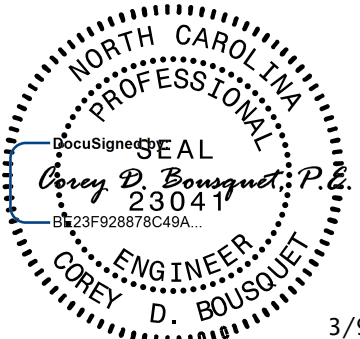

3/9/2023

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			SU • 16
2			4			

+

+

DATE: 8:11 AM 3/9/2023