

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**


BILL OF MATERIALS

9-4" PVC CONDUITS BRIDGE ATTACHMENT		
NO.	UNITS	ITEMS
1	2 EA	4'-8" X 3'-3" X 6" END BENT STEEL SLEEVE, 1/4" WALL THICKNESS (JUTE, CAULKING OR MASTIC)
2	34 EA	ITERMEDIATE HANGER (GALV. STEEL RODS AND ALL INCIDENTALS)
3	1 EA	ANCHOR HANGER WITH STOP RINGS (GALV. STEEL RODS AND ALL INCIDENTALS)
4	2 EA	ANCHOR HANGER WITH STOP RINGS AND EXPANSION COUPLINGS (GALV. STEEL RODS AND ALL INCIDENTALS)
5	86 EA	GALVANIZED STEEL INSERT FORMED INTO THE BRIDGE DECK
6	1512 LF	4" RIGID PVC CONDUIT, SCH. 40 - HEAVY WALL
8	18 EA	END PLUG (OR CAP) FOR 4" PVC CONDUIT
9	9 CY	CLASS B CONCRETE FOR ENCASING UTILITY LINES

THESE MATERIALS ARE ESTIMATED QUANTITIES ONLY AND ARE TO BE FURNISHED BY THE CONTRACTOR FOR THE ATTACHMENT TO THE PROPOSED BRIDGE

PROJECT NO. U-5839
HAYWOOD COUNTY
 STATION: 31+45.00 -L- POT

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

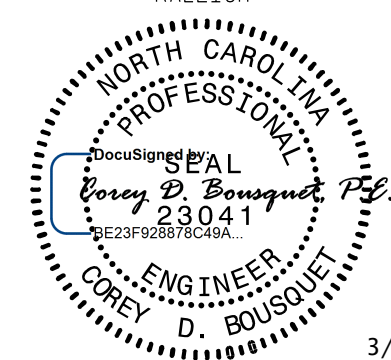

3/9/2023

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	SU-26
1			3			TOTAL SHEETS
2			4			.

+

+

DATE TIME FILE