



BILL OF MATERIAL					
APPROACH SLAB AT EB 1					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
*A1	52	#4	STR	26'-4"	915
A2	52	#4	STR	26'-0"	903
*B1	72	#5	STR	23'-9"	1784
B2	72	#6	STR	24'-5"	2641
*B3	1	#5	STR	3'-7"	4
B4	1	#6	STR	3'-7"	5
*B5	1	#5	STR	4'-0"	4
B6	1	#6	STR	4'-0"	6
*B7	1	#5	STR	18'-5"	19
*B8	1	#5	STR	17'-0"	18
*B9	1	#5	STR	15'-9"	16
*B10	1	#5	STR	14'-9"	15
*B11	1	#5	STR	13'-9"	14
*B12	1	#5	STR	12'-10"	13
*B13	1	#5	STR	12'-0"	13
*B14	1	#5	STR	4'-1"	4
*B15	1	#5	STR	9'-3"	10
*B16	1	#5	STR	7'-10"	8
B17	1	#6	STR	18'-5"	28
B18	1	#6	STR	17'-0"	26
B19	1	#6	STR	15'-9"	24
B20	1	#6	STR	14'-9"	22
B21	1	#6	STR	13'-9"	21
B22	1	#6	STR	12'-10"	19
B23	1	#6	STR	12'-0"	18
B24	1	#6	STR	4'-1"	6
B25	1	#6	STR	9'-3"	14
B26	1	#6	STR	7'-10"	12
REINFORCING STEEL				LBS.	3745
* EPOXY COATED REINFORCING STEEL				LBS.	2837
CLASS AA CONCRETE				C. Y.	42.2

SPlice LENGTHS		
BAR SIZE	EPOXY COATED	UNCOATED
#4	1'-11"	1'-7"
#5	2'-5"	2'-0"
#6	3'-7"	2'-5"

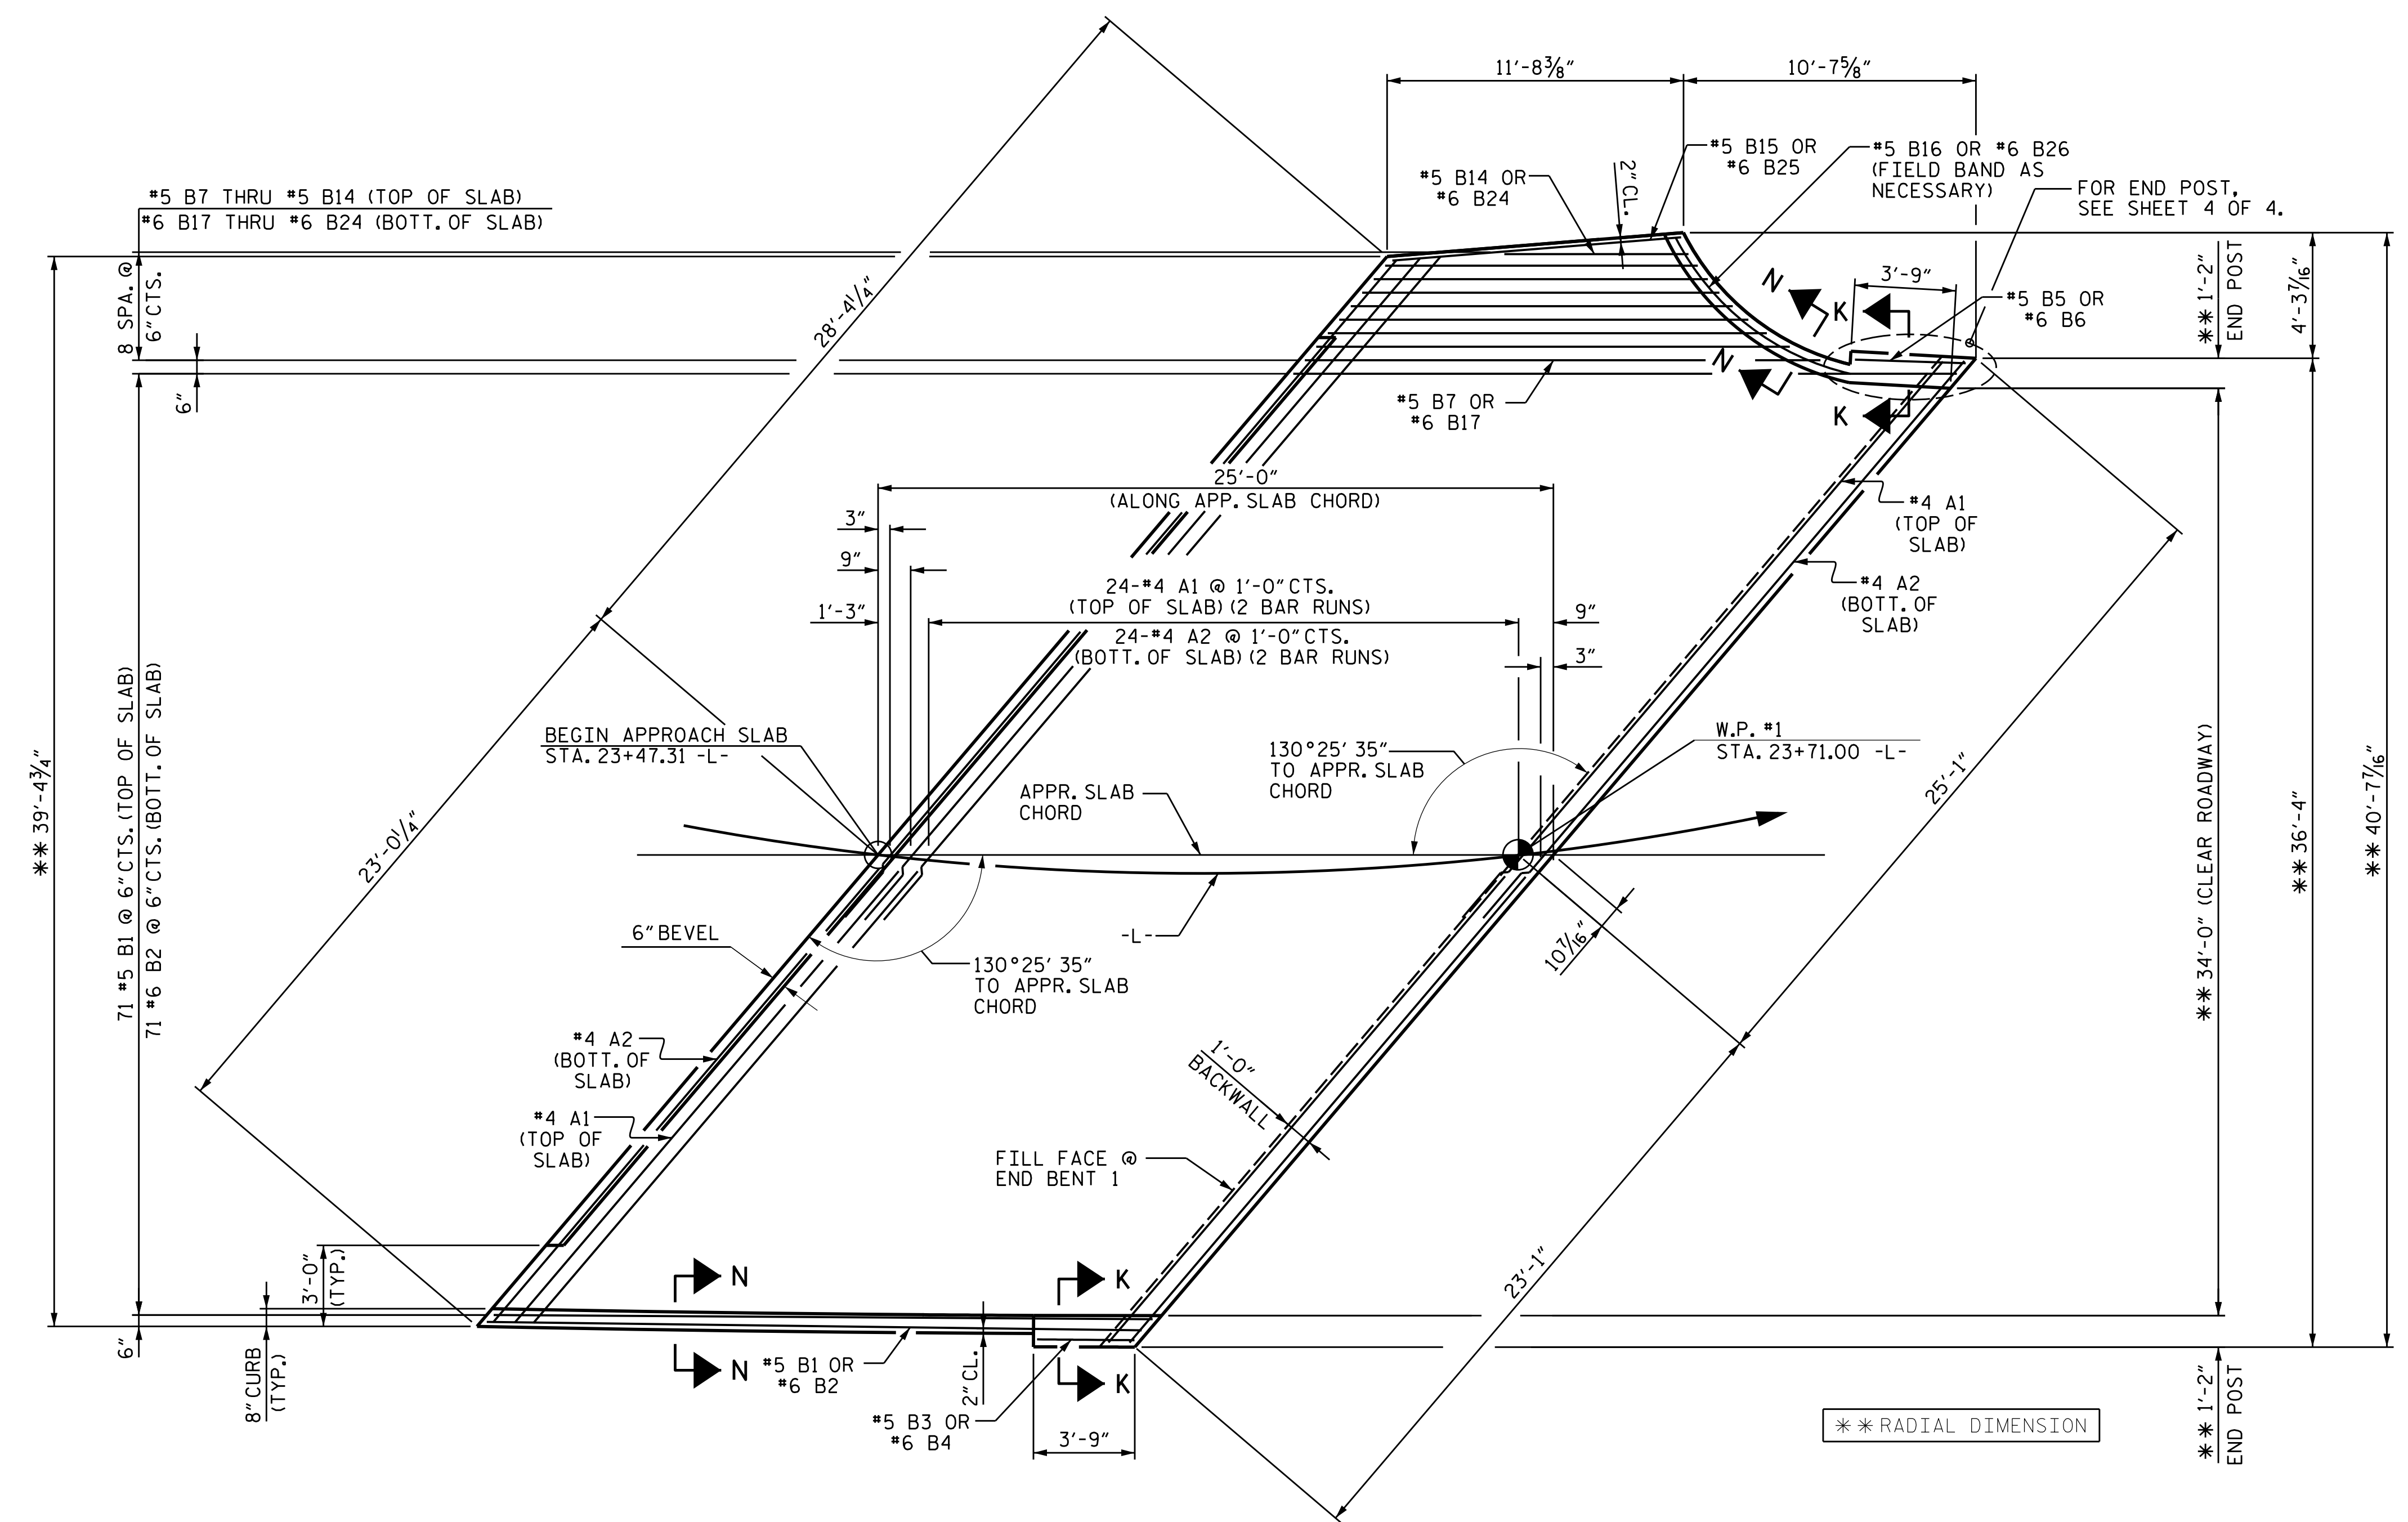

PLAN OF APPROACH SLAB @ END BENT 1

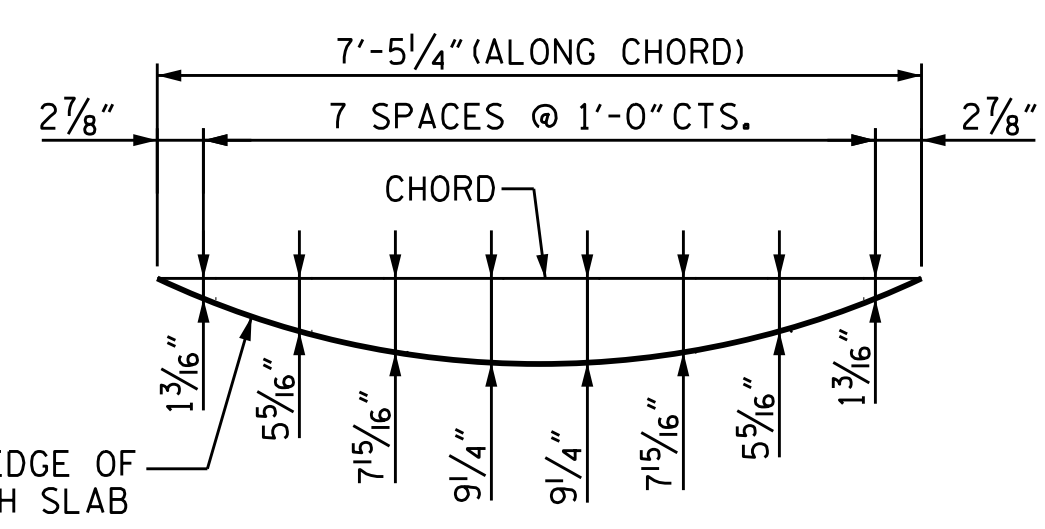

ARC OFFSETS - LEFT SIDE
RIGHT SIDE ARC OFFSETS ARE NEGLIGIBLE AND THEREFORE, NOT PROVIDED.

PROJECT NO. 17BP.14.R.204
JACKSON COUNTY
STATION: 24+58.00-L-
SHEET 1 OF 4

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH

BRIDGE
APPROACH SLAB

11/15/2023 | 7:42 AM EST

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

TGS ENGINEERS
201 W. MARION ST STE 200
SHELBY, NC 28150
PH (704) 476-0003
CORP. LICENSE NO.: C-0275

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-44
1			3			TOTAL SHEETS
2			4			47

DRAWN BY : NMW DATE : 9/22
CHECKED BY : SBW DATE : 9/22