

WBS ELEMENT SHEET NO.
7
2024CPT.08.14.20761

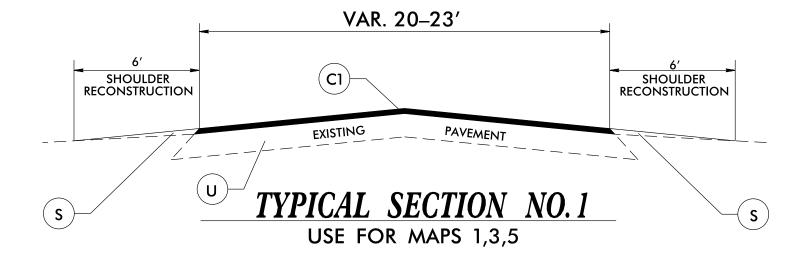

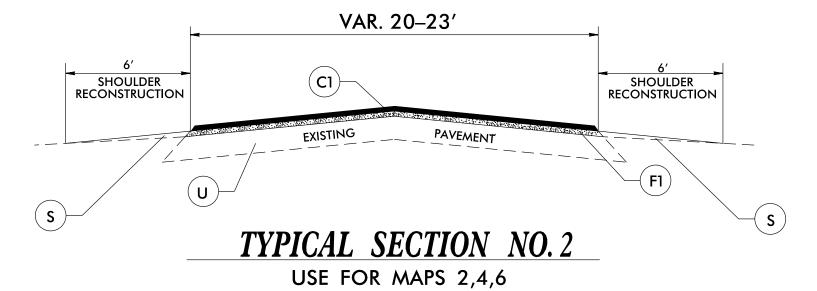

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
F1	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT