

WBS ELEMENT SHEET NO.

9
2024CPT.08.13.20761

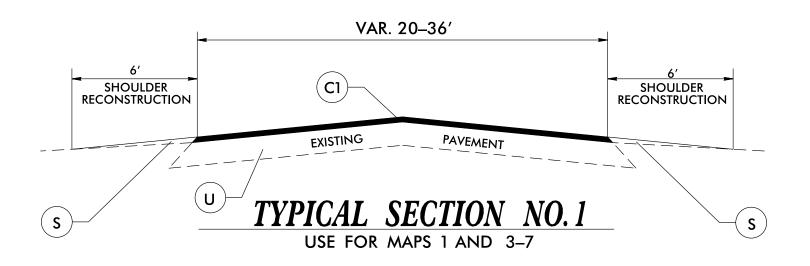

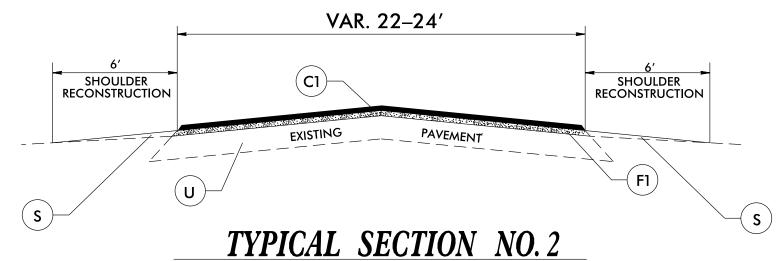

USE FOR MAP 2
USE FOR MAP 8 FROM ARCHDALE RD
TO MAYNARD DRIVE

ŀ	VAR. APPROX. 24'	-
SHOULDER RECONSTRUCTION	(C1)—(D1)	SHOULDER RECONSTRUCTION
	EXISTING PAVEMENT	
(s)	TYPICAL SECTION NO. 3	
l	USE FOR MAP 8 FROM MAYNARD DR TO END OF MAINTENANCE	IVE

PAVEMENT SCHEDULE		
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE \$9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	
D1	PROP. APPROX. 3" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I–19.0C, AT AN AVERAGE RATE OF 342 LBS. PER SQ. YD.	
F1	PROPOSED ASPHALT SURFACE TREATMENT, MAT COAT WITH #67 STONE	
S	AGGREGATE SHOULDER BORROW	
U	EXISTING PAVEMENT	
V1	MILLING 1.5" IN DEPTH	