




TYPICAL SECTION 6
MAP 7 US-158/STRATFORD RD

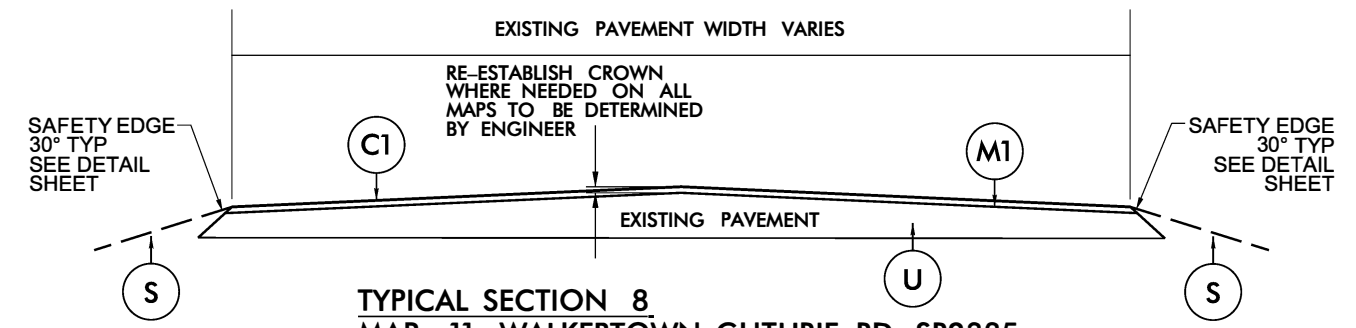

TYPICAL SECTION 8
MAP 11 WALKERTOWN-GUTHRIE RD SR2385
MAP 12 WATKINS FORD RD SR2624

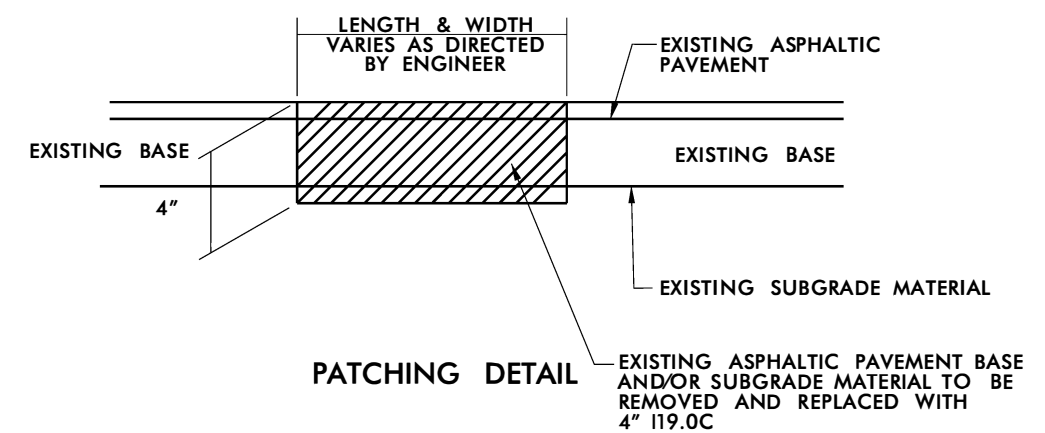

PATCHING DETAIL
EXISTING ASPHALTIC PAVEMENT BASE AND/OR SUBGRADE MATERIAL TO BE REMOVED AND REPLACED WITH 4" 119.0C

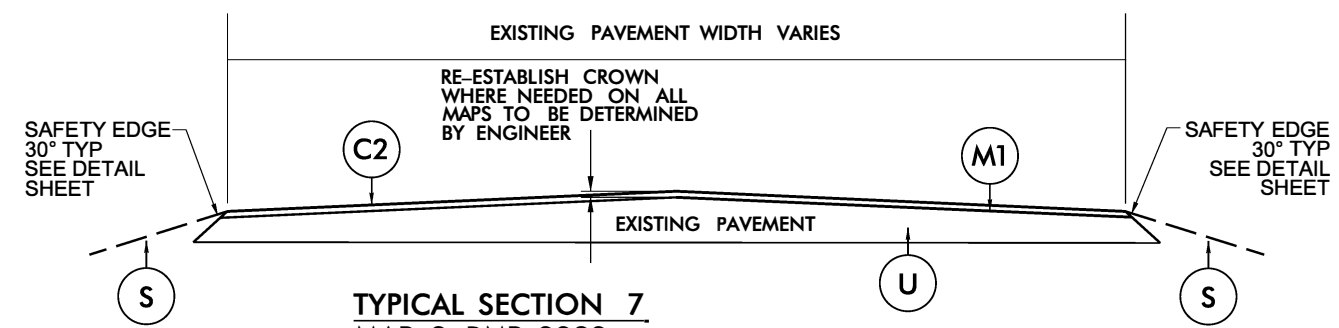

TYPICAL SECTION 7
MAP 8 RMP-3383
MAP 9 RMP-3384
MAP 10 UNION CROSS RD SR2643

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
M1	MILL ASPHALT PAVEMENT, 1½" DEPTH
M2	10" WIDE SINUSOIDAL MILLED RUMBLE STRIP
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT