

ECONOLITE ASC/3-2070 EMERGENCY VEHICLE PREEMPT PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 4. PREEMPTOR/TSP
2. From PREEMPTOR/TSP/SCP Submenu select 1. PREEMPT PLAN 1-10

Place cursor in [] next to Preempt Plan and press 3. Then press the right cursor arrow and toggle the controller to YES. Next cursor down. This will select Emergency Vehicle Preempt #3.

```

PREEMPT PLAN [ 3]  ENABLE....YES
VEH/PED 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
OVERLAP A B C D E F G H I J K L M N O P
TRKCLR V . . . . .
TRKCLR O . . . . .
ENA TRL . . . . .
DWEL VEH . . . . . X . . . . .
DWEL PED . . . . .
DWEL OLP . . F1 . . . . .
CYC VEH . . . . .
CYC PED . . . . .
CYC OLP . . . . .
EXIT PH . X . . . X . . . . .
EXIT CAL . . . . .
SP FUNC . . . . .
    
```

```

ENABLE... YESIPMT OVRIDE.. IINTERLOCK. NO
DET LOCK... XIDELAY.. OIINHIBIT... 0
OVERIDE FL. . IDURATION OICLR-GRN... NO
TERM OLP. NOIPC>YEL YESITERM PH NO
PED DARK.. NOITC RESRV NOIDWELL FL OFF
LINK PMT... OIX FLCOLR REDIEXIT OPT. OFF
X TMG PLN... OIRE-SERV.. OIFLT TYPE.HARD
FREE DUR PMTIR1 NOIR2 NOIR3 NOIR4 NO
--TIMING-----WALKIPED CLIMN GRI YELI RED
ENTRANCE TM. 11 2551 1125.5125.5
-----MIN GRIEXT GRIMX GRI YELI RED
TRACK CLEAR 01 01 0125.5125.5
-----MIN DLIPMTEXTIMX TMI YELI RED
DWL/CYC-EXIT 71 0.01 120125.5125.5
PMT ACTIVE OUT..ON PMT ACT DWELL...NO
OTHER - PRI PMT.OFF NON-PRI PMT....OFF
INH EXT TIME... 0.0 PED PR RETURN...OFF
PRIORITY RETURN.OFF QUEUE DELAY.... OFF
COND DELAY.....OFF
PHASES 1 2 3 4 5 6 7 8
PR RTN% 0 0 0 0 0 0 0 0
PHASES 9 10 11 12 13 14 15 16
PR RTN% 0 0 0 0 0 0 0 0
    
```

PROGRAM EXTEND TIME ON GPS DETECTOR UNIT FOR 2.0 SEC.

ECONOLITE ASC/3-2070 VEHICLE DETECTOR SETUP PROGRAMMING DETAIL FOR ALTERNATE PHASING LOOP 5A

IMPORTANT!

Program detectors per the input file connection and programming chart shown on sheet 1 before proceeding.

1. From Main Menu select 8. UTILITIES
2. From UTILITIES Submenu select 1. COPY/CLEAR
3. Copy from DETECTOR PLAN "1" to DETECTOR PLAN "2".

```

COPY / CLEAR UTILITY
FROM TO
PHASE TIMING.... > PHASE TIMING....
TIMING PLAN..... > TIMING PLAN....
PH DET OPT PLAN. > PH DET OPT PLAN.
DETECTOR PLAN.. 1 > DETECTOR PLAN.. 2
TOGGLE TO SELECT A "FROM" AND A "TO"
THEN PRESS ENTER
    
```

4. From Main Menu select 6. DETECTORS
5. From DETECTOR Submenu select 2. VEHICLE DETECTOR SETUP
6. Place cursor in VEH DET PLAN [] position and enter "2".

- Place cursor in VEH DETECTOR [] position and enter "5".
- Set delay time to "0".

```

VEH DETECTOR [ 5]  VEH DET PLAN [ 2]
TYPE: N-NTCIP
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
5 5 . . . . .
CALL OPTION.... YES DELAY TIME... 0.0
EXT OPTION. PASSAGE EXTENSION TIME. 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY- NO
    
```

- Place cursor in VEH DETECTOR [] position and enter "22".
- Set assigned phase to "0".

```

VEH DETECTOR [22]  VEH DET PLAN [ 2]
TYPE: N-NTCIP
TS2 DETECTOR..... ECPI LOG..... NO
DET PH - 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
22 0 . . . . .
CALL OPTION.... YES DELAY TIME... 0.0
EXT OPTION. PASSAGE EXTENSION TIME. 0.0
USE ADDED INITIAL . CROSS SWITCH PH.. 0
LOCK IN..... NONE NTCIP VOL . OR OCC .
PMT QUEUE DELAY- NO
    
```

END PROGRAMMING

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 05-1234
DESIGNED: July 2023
SEALED: 09/05/2023
REVISED: N/A

ECONOLITE ASC/3-2070 OVERLAP PROGRAMMING DETAIL

(program controller as shown)

1. From Main Menu select 2. CONTROLLER
2. From CONTROLLER Submenu select 2. VEHICLE OVERLAPS

Toggle 3x

OVERLAP C

Select TMG VEH OVLP [C] and 'PPLT FYA'

```

TMG VEH OVLP... [C] TYPE: .... PPLT FYA
PROTECTED LEFT TURN... PHASE 5
OPPOSING THROUGH..... PHASE 6
FLASHING ARROW OUTPUT.....CH11 ISOLATE
DELAY START OF: FYA..0.0 CLEARANCE..0.0
ACTION PLAN SF BIT DISABLE..... 5
    
```

END PROGRAMMING

ECONOLITE ASC/3-2070 PREEMPT FILTERING PROGRAMMING DETAIL


(program controller as shown)

1. From Main Menu select 4. PREEMPTOR/TSP
2. From PREEMPTOR/TSP/SCP Submenu select 2. ENABLE PREEMPT FILTERING & TSP/SCP

```

ENABLE PREEMPT FILTERING & TSP/SCP
FILTERED SOLID PULSING
INPUT 1 ...BYPASSED... ..BYPASSED..
2 ...BYPASSED... ..BYPASSED..
3 ..PREEMPT 3. ...BYPASSED..
4 ...BYPASSED... ..BYPASSED..
5 ...BYPASSED... ..BYPASSED..
6 ...BYPASSED... ..BYPASSED..
7 ...BYPASSED... ..BYPASSED..
8 ...BYPASSED... ..BYPASSED..
9 ...BYPASSED... ..BYPASSED..
10 ...BYPASSED... ..BYPASSED..
    
```

Electrical Detail - Sheet 2 of 3

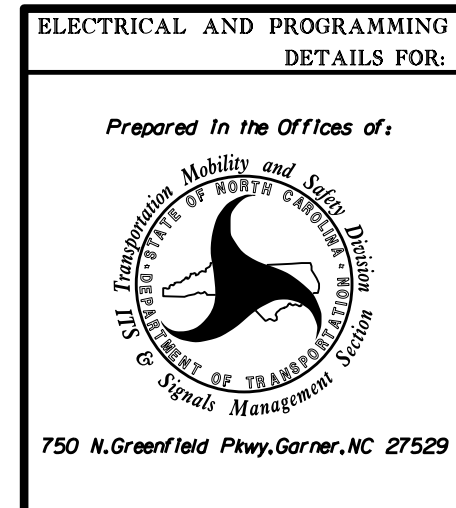

SR 1401 (Cole Mill Road)
at
I-85 SB/US 70 WB Ramps

Division 5 Durham County Durham

PLAN DATE: August 2023 REVIEWED BY:

PREPARED BY: S.Kirkpatrick REVIEWED BY:

REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED

SEAL
NORTH CAROLINA
PROFESSIONAL
ENGINEER
RYAN W. HOUGH
036833

DocuSigned by:
Ryan W. Hough 09/05/2023
DATE

SIG. INVENTORY NO. 05-1234

05-SEP-2023 11:26 S:\TSS\WORK\TSS\SIGNAL\WORK\Houses\4519_Mon#Projects From Signal Design\Mch1ive Projects\Kirkpatrick\ck405-1234 & 05-1235 (I-5941)\M051234_sme.ele-20230905-dgn sgn.r.rpt.rpt.ck