


SUMMARY OF QUANTITIES

	ESTIMATE	ACTUAL
SHOTBLASTING OF BRIDGE DECK	857.0 SY	
SILANE DECK TREATMENT	857.0 SY	
SURFACE PREPARATION FOR SILANE BARRIER RAIL TREATMENT	1301.4 SF	
SILANE BARRIER RAIL TREATMENT	1301.4 SF	

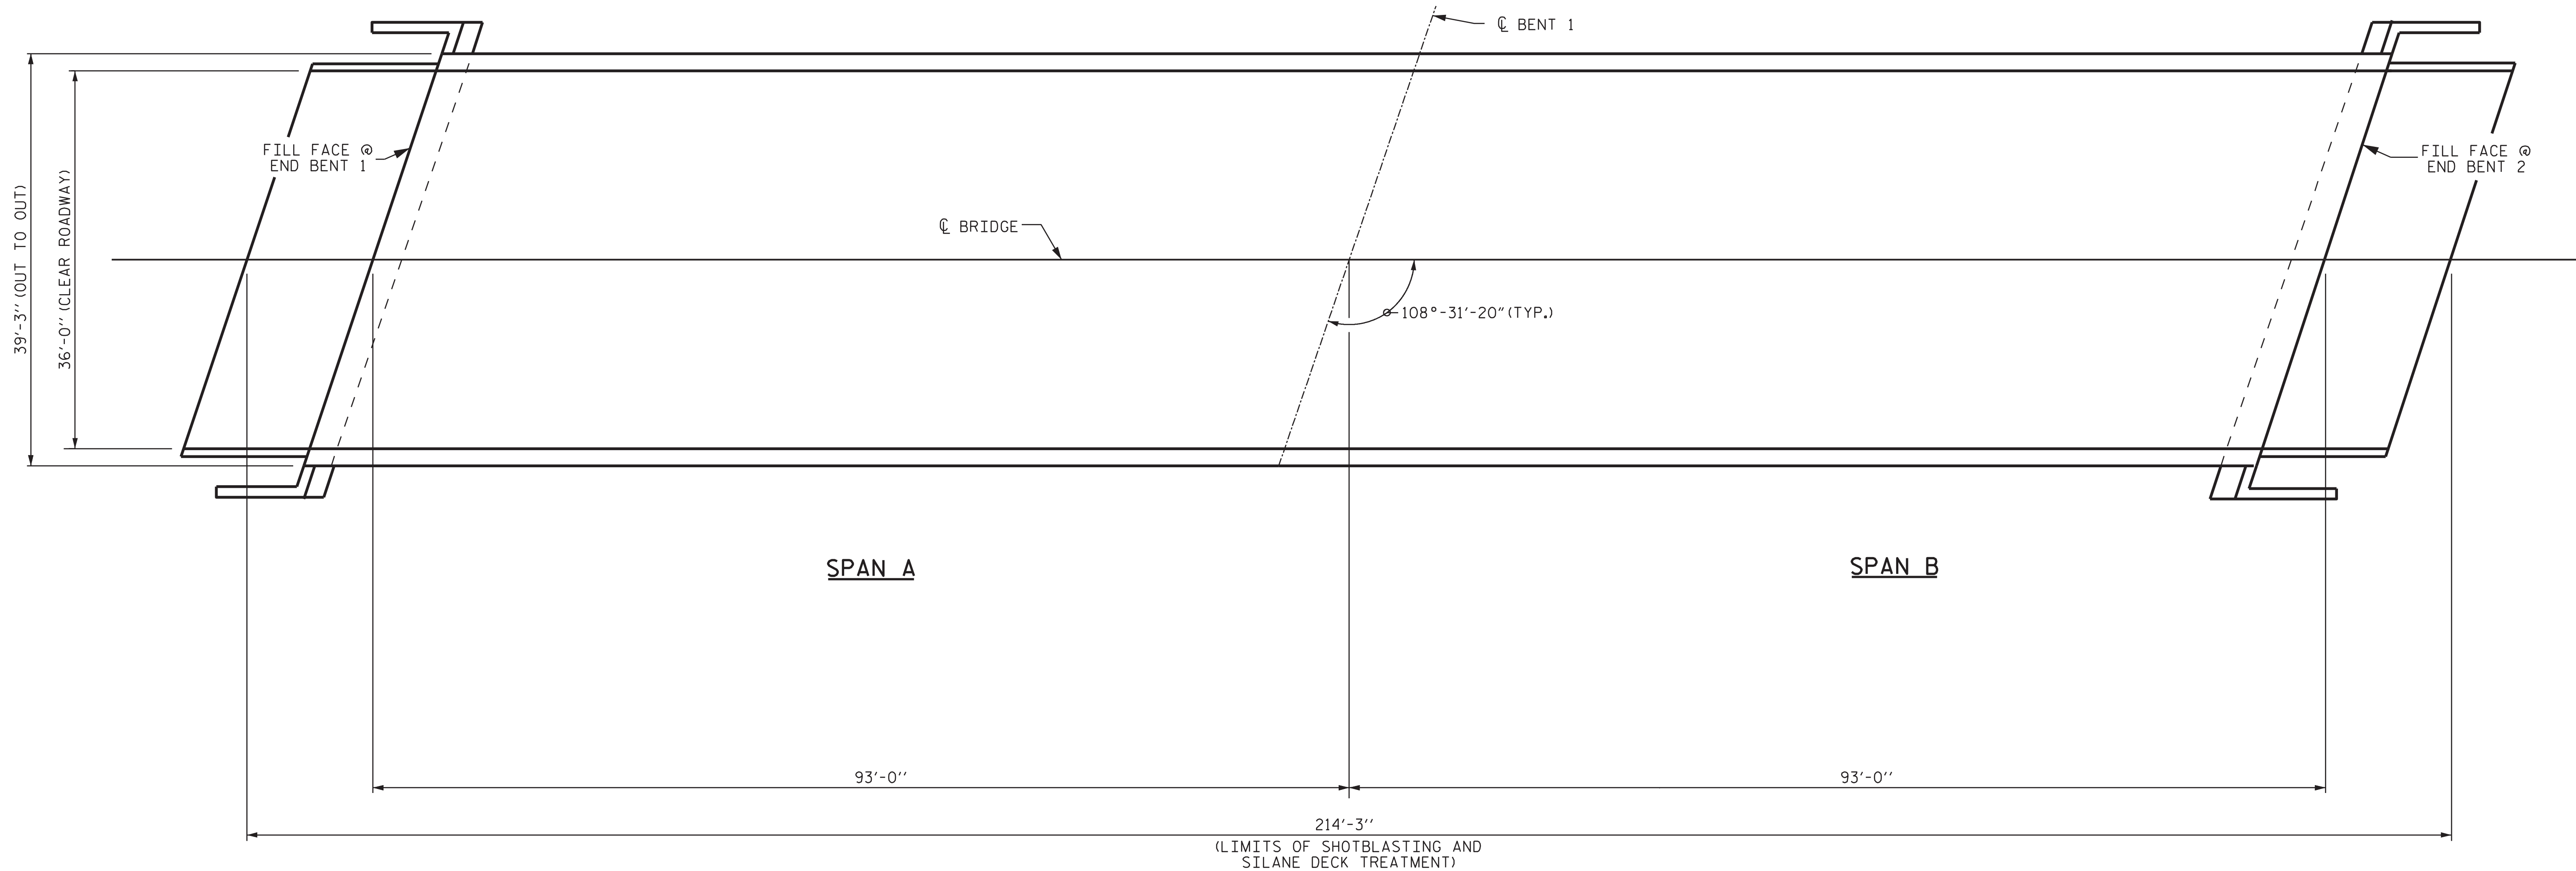


PLAN
(PILES ARE NOT SHOWN FOR CLARITY)

PROJECT NO. HI-0016
ROBESON COUNTY
 BRIDGE NO. 770512

NOTES

REPAIR LOCATIONS AND ESTIMATED QUANTITIES ARE GIVEN WITH THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ADJUST THE ACTUAL QUANTITIES ENTERED INTO THE AS-BUILT REPAIR QUANTITY TABLE.

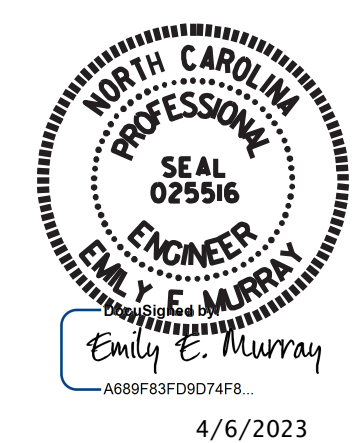

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

PLAN OF SPAN A-B

DRAWN BY : T. MAZARURA DATE : 11/22
 CHECKED BY : E. E. MURRAY DATE : 12/22

VOLKERT
 5430 Wade Park Blvd., Suite 410
 Raleigh, NC 27607
 Tel. 919-854-0344 Fax. 919-854-0355
 NC License No. F-0765

DOCUMENT NOT CONSIDERED
 FINAL UNLESS ALL
 SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS
1			3			S-19 21
2			4			