


PROJECT: 14SP.20441.1

CONTRACT: C204411

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

**PAVEMENT MARKING PLAN
HAYWOOD COUNTY**

**LOCATION : BRIDGE NO. 430175 OVER BIG CREEK
ON SR 1332 (WATERVILLE ROAD)**

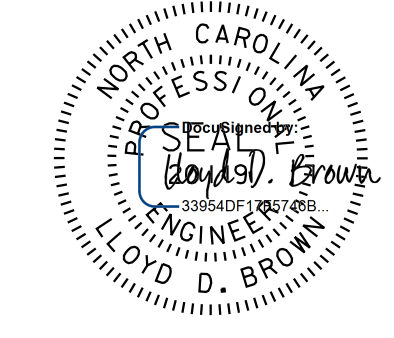PROJECT REFERENCE NO. 14SP.20441.1	SHEET NO. PMP-1
	
11/30/2023	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C. DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
1205.01	PAVEMENT MARKINGS - LINE TYPES AND OFFSETS
1205.02	PAVEMENT MARKINGS - TWO LANE & MULTILANE ROADWAYS
1205.12	PAVEMENT MARKINGS - BRIDGES
1261.01	GUARDRAIL AND BARRIER DELINEATORS - INSTALLATION SPACING
1261.02	GUARDRAIL AND BARRIER DELINEATORS - TYPES & MOUNTING
1262.01	GUARDRAIL END DELINEATION

GENERAL NOTES

THE FOLLOWING GENERAL NOTES APPLY AT ALL TIMES FOR THE DURATION OF THE CONSTRUCTION PROJECT, EXCEPT WHEN OTHERWISE NOTED IN THE PLAN, OR DIRECTED BY THE ENGINEER.

- A) INSTALL PAVEMENT MARKINGS ON THE FINAL SURFACE
ROAD NAME: _____ MARKING _____ MARKER _____
SR 1332 (WATERVILLE ROAD) THERMOPLASTIC NONE
- B) REMOVE/REPLACE ANY CONFLICTING/DAMAGED PAVEMENT MARKINGS AND MARKERS.
- C) PASSING ZONES WILL BE DETERMINED IN THE FIELD AND MUST BE APPROVED BY THE ENGINEER.
- D) REMOVE ALL RESIDUE AND SURFACE LAITANCE BY ACCEPTABLE METHODS AND TREAT WITH APPROVED PRIMER ON CONCRETE BRIDGE DECKS PRIOR TO PLACING THERMOPLASTIC PAVEMENT MARKING MATERIAL.


INDEX

SHEET NO.	DESCRIPTION
PMP-1	PAVEMENT MARKING PLAN TITLE SHEET AND SCHEDULE
PMP-2	PAVEMENT MARKING DETAIL AND QUANTITIES

**PAVEMENT MARKING
SCHEDULE**


FINAL
PAVEMENT MARKINGS

SYMBOL	DESCRIPTION
THERMOPLASTIC (4", 90 MIL)	
(T1)	WHITE EDGELINE
(T5)	2 FT - 6 FT / SP WHITE MINISKIP
(T13)	YELLOW DOUBLE CENTER



Prepared in the Office of:
JOHNSON, MIRMIRAN, & THOMPSON, INC.
1318-F Patton Avenue
Asheville NC, 28806

TRANSPORTATION ENGINEER _____ LLOYD D. BROWN, P.E.
TRANSPORTATION DESIGN ENGINEER _____ ALEX FITZPATRICK

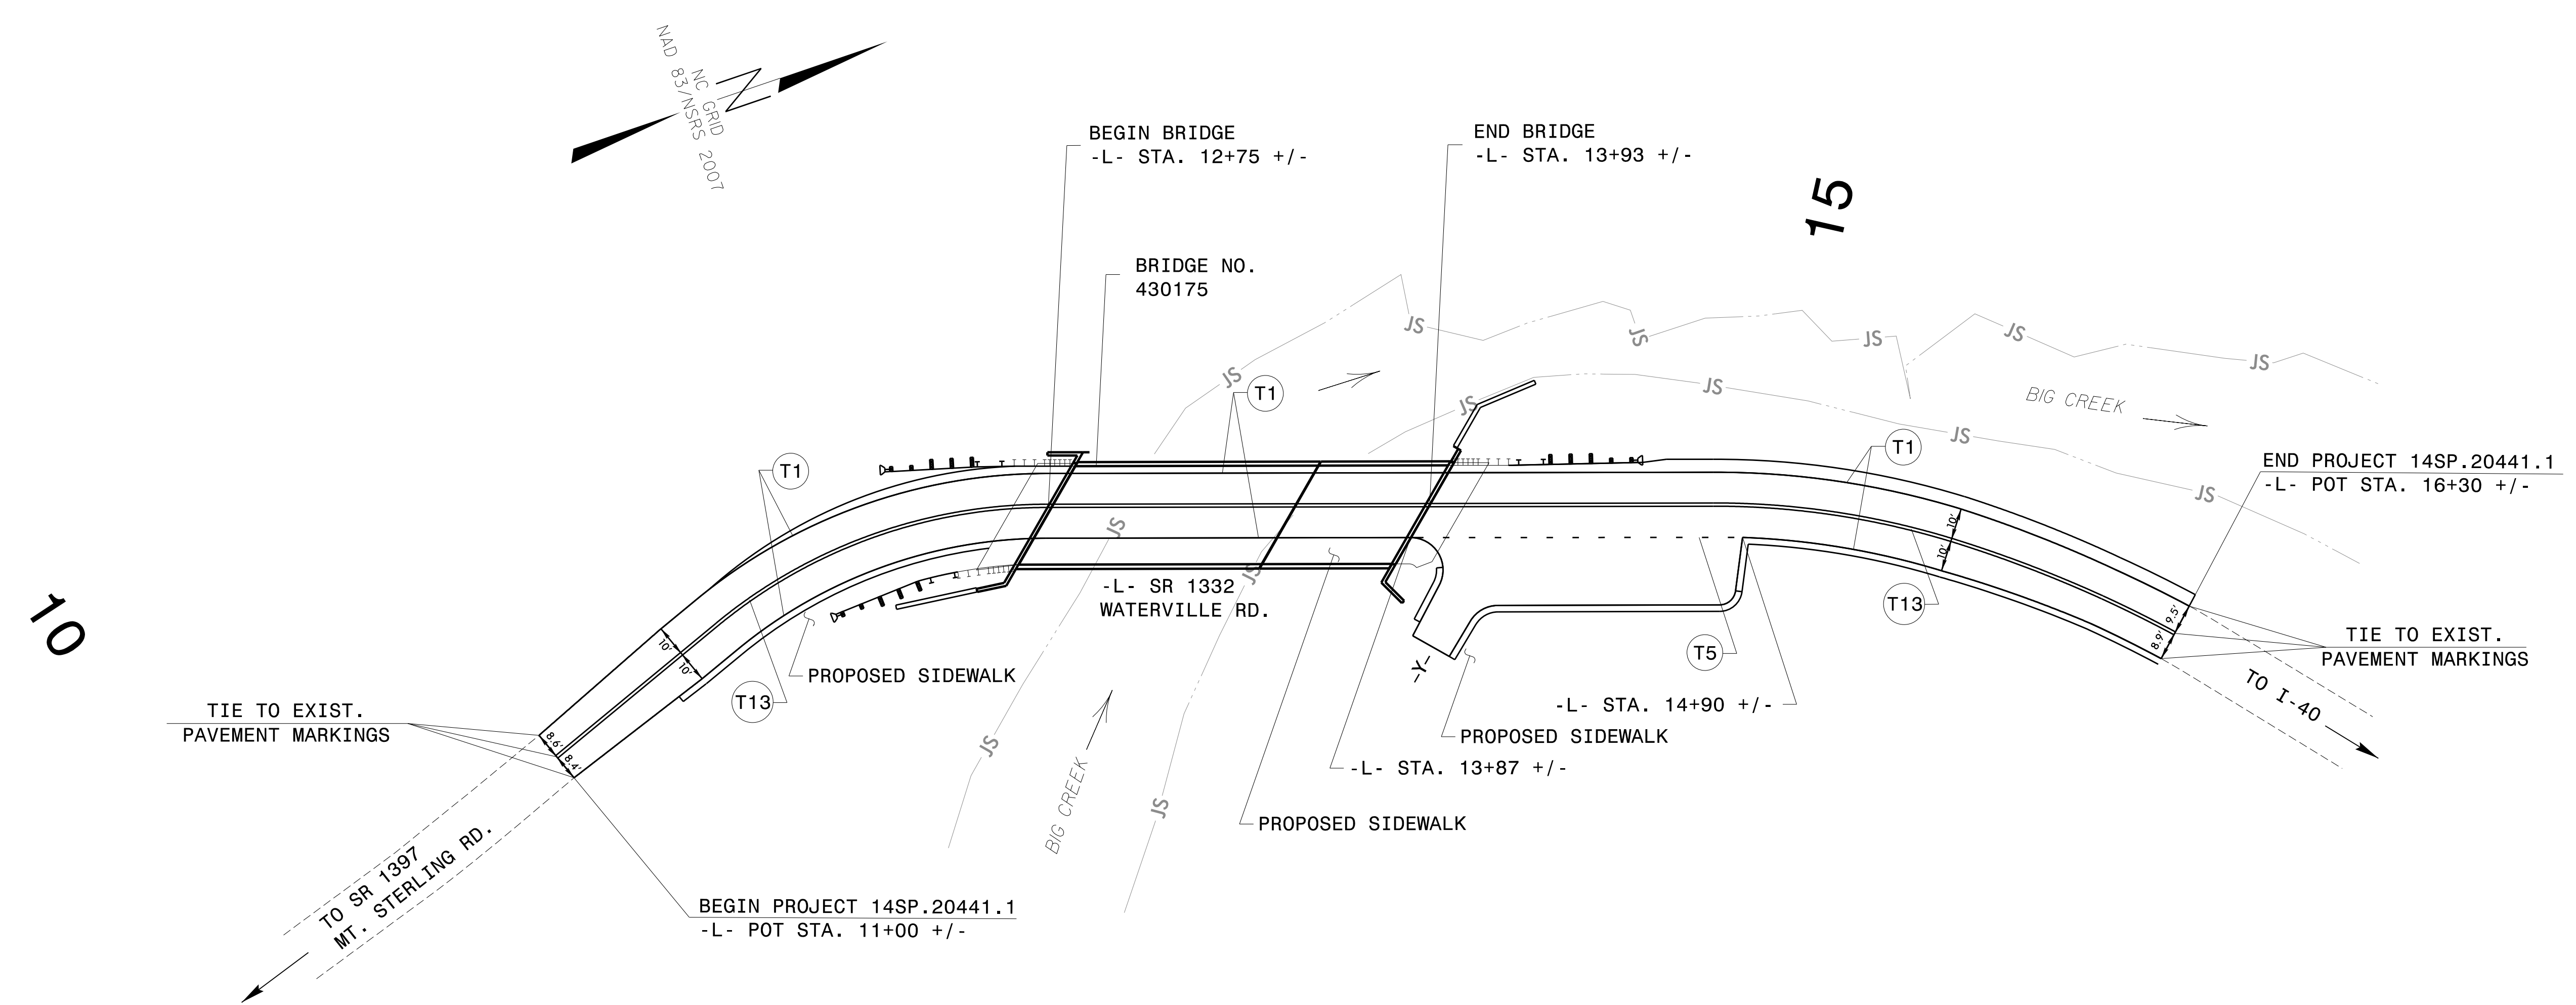

10


15

FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	QUANTITY BREAKDOWN	PAY ITEM	TOTAL QUANTITY
(T1)	WHITE EDGELINE (4", 90 MIL)	957 FT	4685000000-E	957 FT
(T5)	2 FT - 6 FT /SP WHITE MINISKIP (4", 90 MIL)	26 FT	4685000000-E	26 FT
(T13)	YELLOW DOUBLE CENTER (4", 90 MIL)	1,060 FT	4685000000-E	1,060 FT

SCALE 1" = 30'

APPROVED: *Lloyd D. Brown*
 DATE: 11/29/2023
 SEAL
 NORTH CAROLINA PROFESSIONAL SEAL 20119
 ENGINEER LLOYD D. BROWN

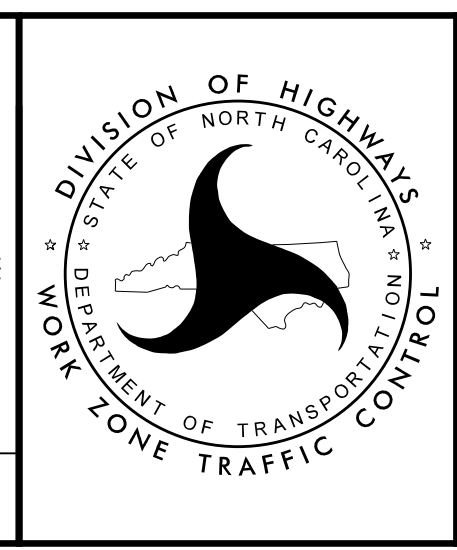

PAVEMENT MARKING DETAIL AND QUANTITIES

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

11/29/2023 3:02:21PM
 V:\Asheville\transportation\3236-07 MTC 14SP.20441.1\Haywood 175\TrafficControl\TCP\Haywood\75_TC.pmp-2.dgn
 User:amfitzpatrick