


NOTES:

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE. IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER WILL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATIONS AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE REPAIR QUANTITY TABLE.

DECK UNDERSIDE REPAIR QUANTITY TABLE

PCCS REPAIRS	QUANTITIES			
	ESTIMATE		ACTUAL	
	AREA SF	VOLUME CF	AREA SF	VOLUME CF
REPAIRS TO PRESTRESSED CONCRETE CORED SLABS	23.7	4.2		

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 2" CLEARANCE TO SAWCUT. SEE "TYPICAL PCCS REPAIR DETAILS" SHEET S4-7.

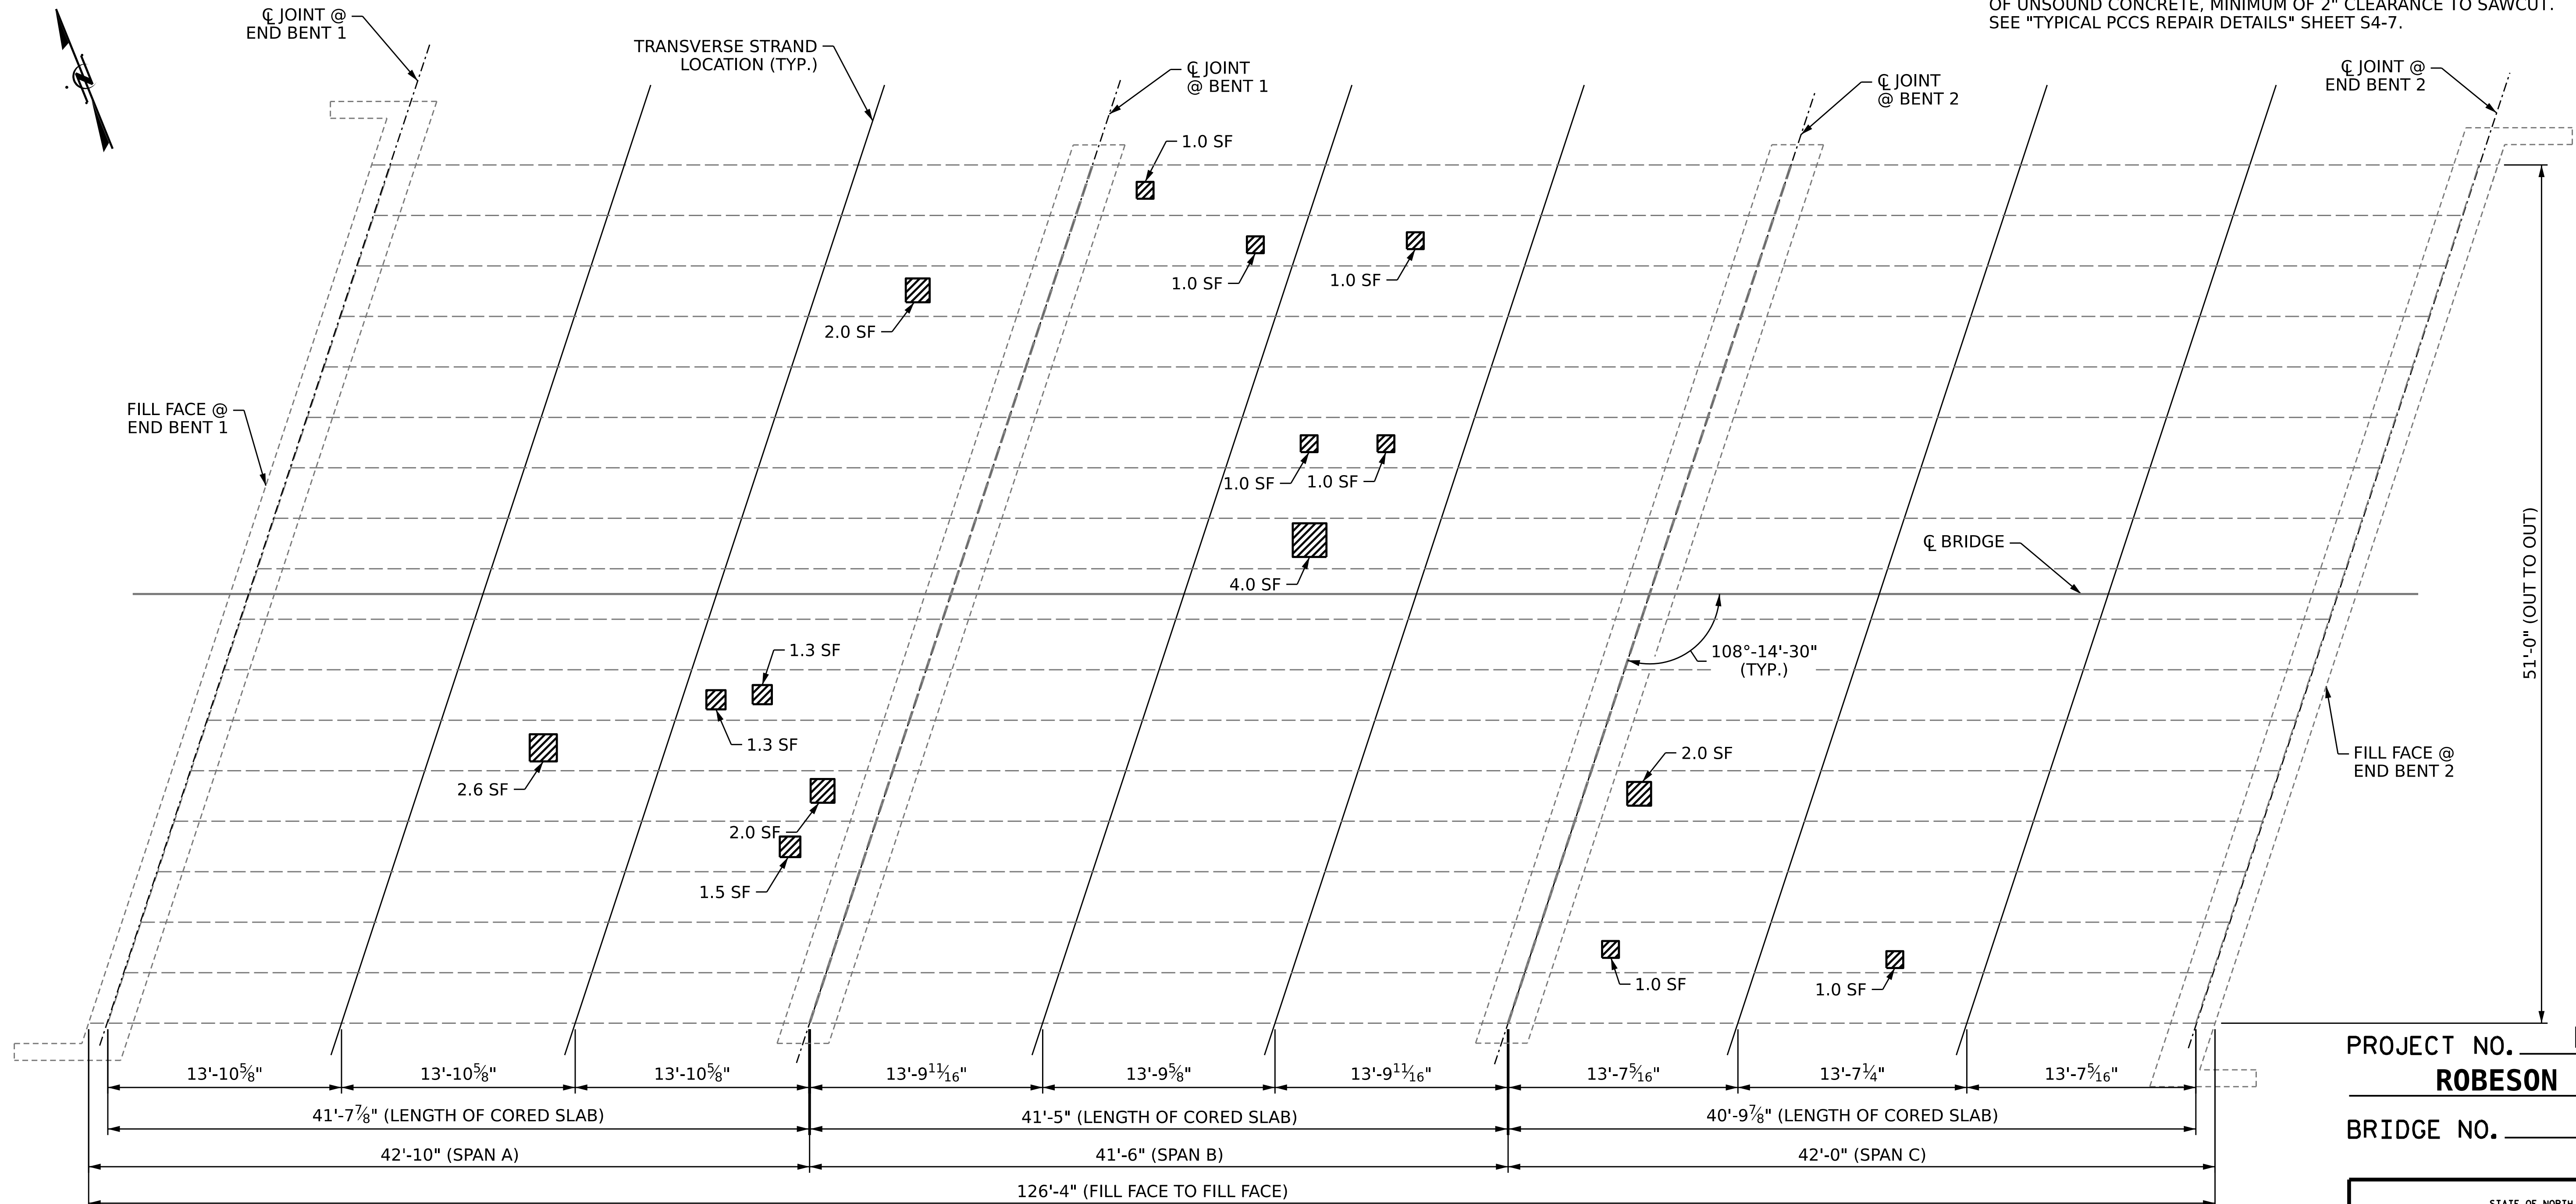

PLAN OF SPANS

BOTTOM VIEW

PROJECT NO. **HI-0017**
ROBESON COUNTY
 BRIDGE NO. **770454**



STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

UNDERSIDE OF CORED SLAB REPAIR LOCATIONS

DRAWN BY : J. BALDWIN DATE : 07/2022
 CHECKED BY : S. WANCE DATE : 11/2022

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO. S4-6
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			TOTAL SHEETS
2			4			7