


**BRIDGE**

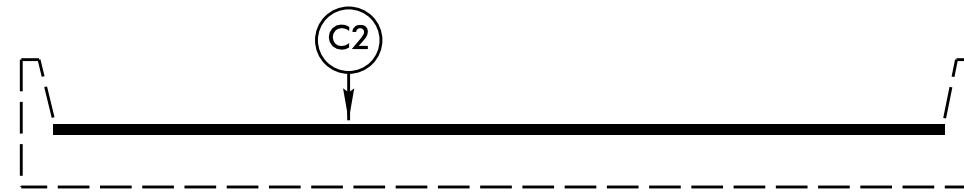

**BRIDGE DETAIL**

BRIDGE NUMBER 652 MAP 20,  
SEE MAP FOR BRIDGE LOCATION.

**BRIDGE**



\* COORDINATE WITH BRIDGE MAINTENANCE TO REMOVE  
EXISTING ASPHALT 15 DAYE BEFORE RESURFACING BEGINS.

**BRIDGE DETAIL**

WHERE BRIDGES WILL BE RESURFACED.  
SEE MAP FOR BRIDGE LOCATION.  
USE AT BRIDGE NUMBER: 121 MAP 11.

**PAVEMENT SCHEDULE**

C1	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.50 LBS. PER SQ. YARD
T1	SHOULDER RECONSTRUCTION
V1	MILLING ASPHALT PAVEMENT, 0 TO 1-1/2" DEPTH
V2	MILLING ASPHALT PAVEMENT 1-1/2" DEPTH
V3	INCIDENTAL MILLING