


PROJECT REFERENCE NO.	SHEET NO.
U-4405B	SCP.4

06-0592 BACK PULL AND RECONNECT STEPS:

1. DISCONNECT EXISTING 12-STRAND FIBER OPTIC DROP CABLE FROM EXISTING 06-0592 SIGNAL CABINET.
2. UNLASH EXISTING 12-STRAND FIBER OPTIC DROP CABLE FROM EXISTING TEMPORARY MESSENGER CABLE. PULL DROP CABLE FROM EXISTING CABINET TO EXISTING POWER POLE (#137).
3. RELOCATE EXISTING CABINET, CONTROLLER, & ETHERNET SWITCH ONTO NEW CABINET FOUNDATION.
4. REINSTALL/REROUTE EXISTING DROP CABLE THROUGH RISER ON POWER POLE (#137), CONDUIT, AND JUNCTION BOX TO RELOCATED CABINET.
5. RE-SPLICE EXISTING 12-STRAND FIBER OPTIC DROP CABLE AT RELOCATED 06-0592 SIGNAL CABINET.
6. REMOVE ANY REMAINING TEMPORARY MESSENGER CABLE/OTHER ASSOCIATED HARDWARE, AS APPLICABLE.

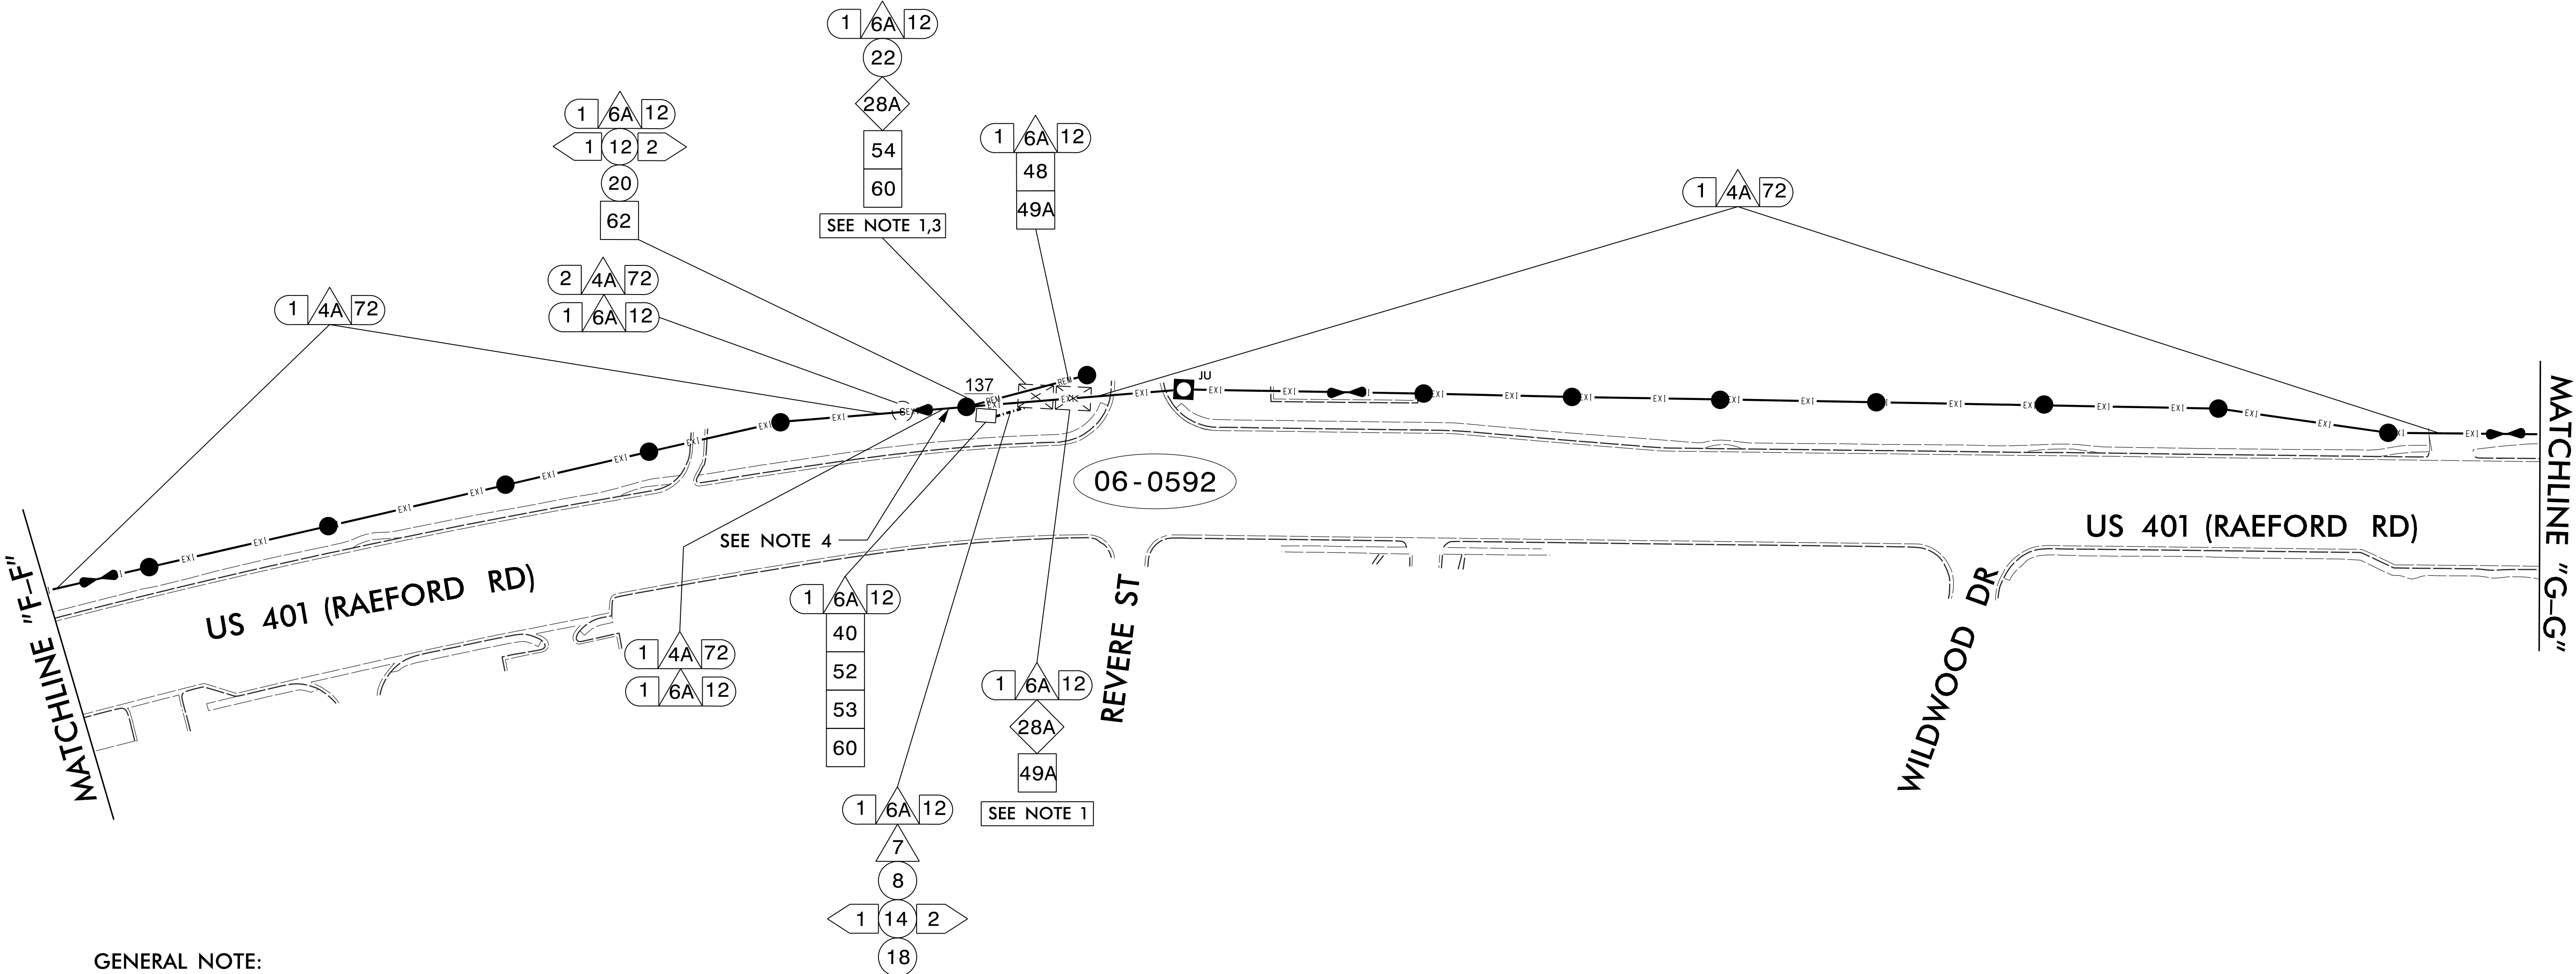

GENERAL NOTE:

FIVE (5) DAYS BEFORE BEGINNING ANY WORK ON THE SIGNAL COMMUNICATIONS SYSTEM, THE CONTRACTOR SHALL CONTACT THE CITY OF FAYETTEVILLE TRAFFIC SERVICES DIVISION AT 910-433-1660. WORK IS NOT COMPLETE UNTIL ALL MODIFICATIONS TO THE SIGNAL COMMUNICATION SYSTEM HAVE BEEN MADE AND THE SYSTEM IS OPERATIONAL.

NOTES:

1. AS PART OF TEMPORARY SIGNAL DESIGN 1 (TMP PHASE 1), THE EXISTING CONTROLLER AND CABINET WILL BE RELOCATED TO A NEW CABINET FOUNDATION AND THE EXISTING COMMUNICATION CABLES WILL NEED TO BE BACK-PULLED FROM THE EXISTING CABINET LOCATION AND RECONNECTED AT THE NEW CABINET LOCATION.
2. ALL EXISTING FIBER OPTIC SPLICES WERE INSTALLED BY OTHERS AND ARE ASSUMED TO BE INSTALLED PER THE SPLICING DETAILS (SEE SHEETS SCP-9 TO SCP-15). IF ANY DESCREANCIES ARE NOTED, CONTACT DIVISION AND/OR CITY ENGINEER IMMEDIATELY FOR FURTHER INSTRUCTION.
3. EXISTING CABINET RELOCATED ONTO NEW CABINET FOUNDATION.
4. EXISTING JOINT USE POLE WITH EXISTING SPARE COILED DROP CABLE. STORE EXTRA DROP CABLE IN JUNCTION BOX AND/OR CABINET.

TEMPORARY SIGNAL DESIGN 1 (TMP PHASE 1)

 Stantec Consulting Services Inc. 801 Jones Franklin Road Suite 300 Raleigh, NC 27606 Tel. (919) 851-6866 Fax. (919) 851-7024 www.stantec.com License No. F-0672	 750 N. Greenfield Plaza, Garner, NC 27529	COMMUNICATIONS CABLE / CONDUIT ROUTING PLANS		 DocuSigned by: Regina M. Muncey 10/8/2024 SIGNATURE DATE CADD FILE NAME	
		DIVISION 06	CUMBERLAND CO.		FAYETTEVILLE
		PLAN DATE: AUGUST 2024	REVIEWED BY: R. MUNCEY		
		PREPARED BY:	REVIEWED BY: L. OVERN		
SCALE NTS		REVISIONS	INIT.	DATE	