

T.I.P.: U-5777

CONTRACT:

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION

SIGNING PLAN
CATAWBA COUNTY

LOCATION: NC 127 – 1ST AVENUE SE TO 2ND AVENUE SE

PROJECT REFERENCE NO.


U-5777

SHEET NO.

SIGN-1

APPROVED:

DocuSigned by:




E3078FB4598E44B...

DATE:

2/17/2025

SEAL



DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - CONTRACT STANDARDS AND DEVELOPMENT UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
901.50	ARROWS AND SHIELDS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL SUPPORTS
910.50	SIGNING FOR SPEED REDUCTION ZONE

SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	684	LF
4102000000	904	SIGN ERECTION, TYPE E	38	EA
4108000000	904	SIGN ERECTION, TYPE F	5	EA
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	25	EA
4238000000	907	DISPOSAL OF SIGN, D, E OR F	3	EA

GENERAL NOTES

- . SIGNS FURNISHED BY STATE.
- . ALL PROPOSED SIGNS SEE PAY ITEM NOTE 1 UNLESS OTHERWISE NOTED.
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL TYPE E AND F SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.
- . ALL EXISTING SIGNS ON "U" CHANNEL SUPPORT(S) WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . THE BACKGROUND FOR TYPE E AND F SIGNS SHALL BE GRADE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

PAY ITEM NOTES


- 1 SIGN ERECTION, TYPE D, E OR F
- 2 DISPOSAL OF SIGN SYSTEM, U-CHANNEL
- 3 DISPOSAL OF SIGN, D, E OR F

PROJECT NOTE

A BEFORE WORK SHALL BEGIN ON WAYFINDING SIGN ASSEMBLIES, THE CONTRACTOR SHALL COORDINATE WITH THE CITY OF HICKORY FOR REMOVAL AND STORAGE OF ALL EQUIPMENT AND SIGNS DURING CONSTRUCTION. ONCE CONSTRUCTION IS COMPLETE, THE CONTRACTOR SHALL COORDINATE WITH THE CITY OF HICKORY FOR NEW INSTALLATION OF SIGN ASSEMBLIES.

PLANS SUBMITTED TO:

SCOTT M. POSTON N.C.D.O.T DIVISION 12 TRAFFIC ENGINEER



PLANS PREPARED BY: HNTB NORTH CAROLINA, P.C.

A.D. KLINSIEK, PE, PTOE SIGNING PROJECT MANAGER

J.A. WAGNER, PE SIGNING PROJECT ENGINEER


T.R. TERRELL SIGNING DESIGN SENIOR TECHNICIAN




HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554
(919) 546-8997

INDEX

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	TYPE E AND F SHEETS
SIGN-3	EXISTING SIGNING PLAN SHEET
SIGN-4	PROPOSED SIGNING PLAN SHEET

PROJECT REFERENCE NO.	SHEET NO.
U-5777	SIGN-3
APPROVED: <i>Andrew D. Klinksek</i> <small>E3078FB4596E44B</small>	
DATE: 2/17/2025	
SEAL	
	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

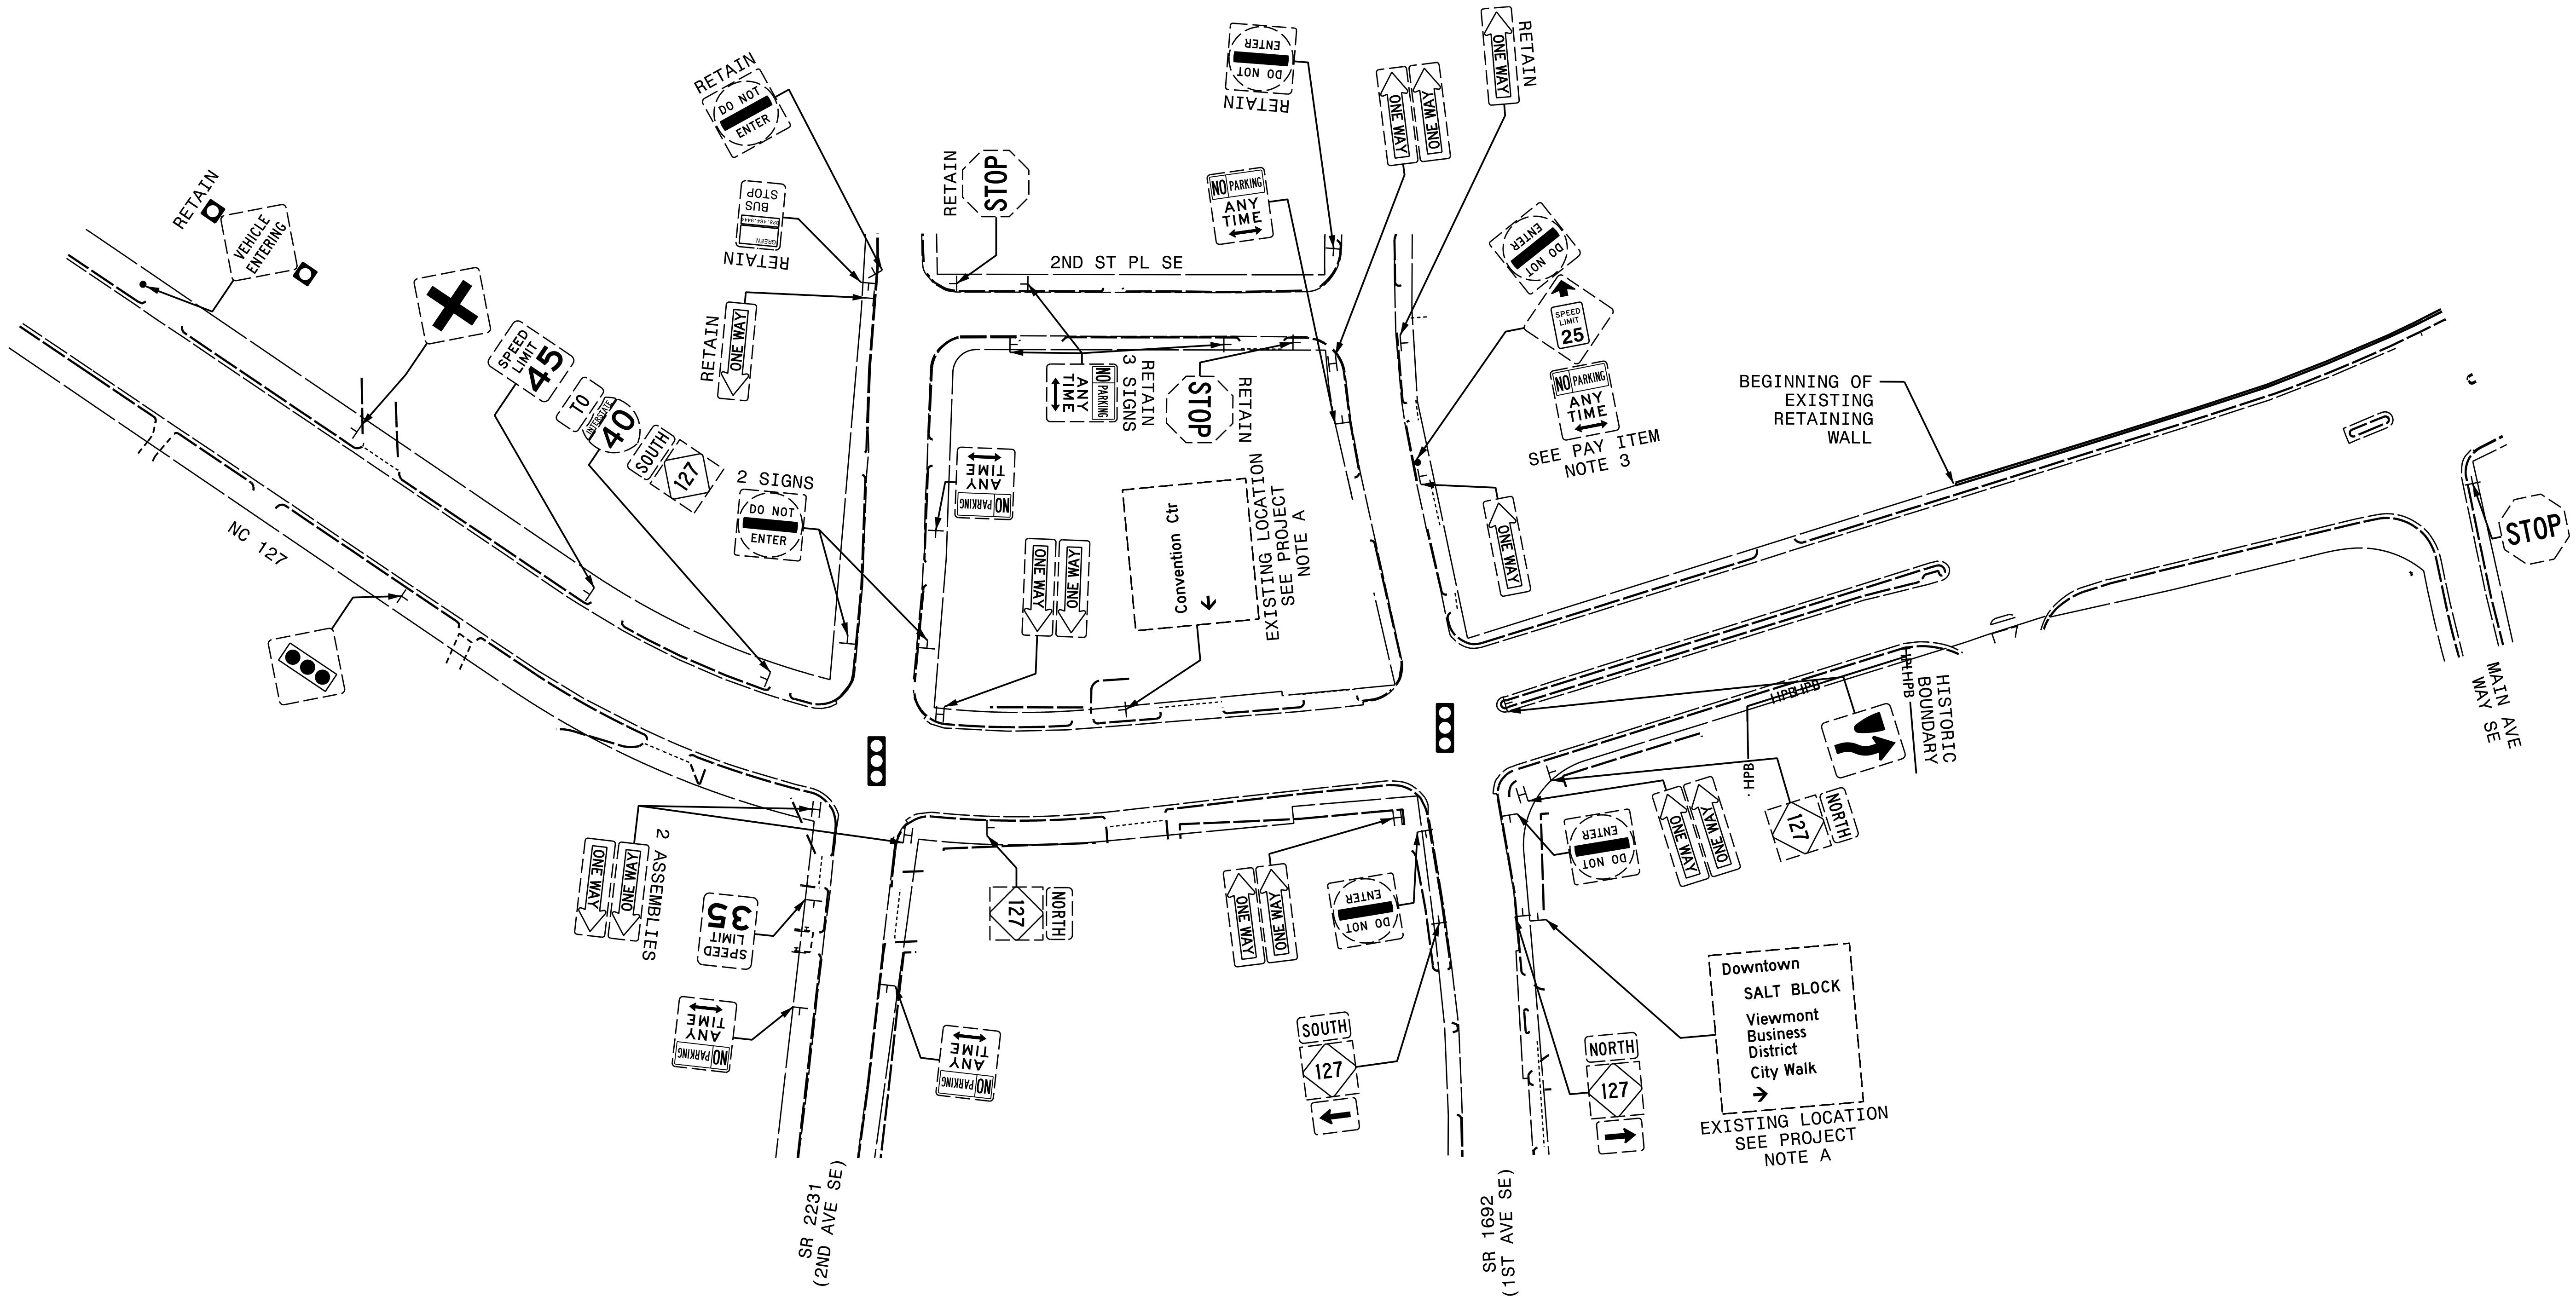

NOTE:
1. ALL EXISTING SIGNS WITHIN ROADWAY PROJECT LIMITS
SEE PAY ITEM NOTE 2 UNLESS OTHERWISE NOTED.

HNTB
HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609
NC License No: C-1554
(919) 546-8997

**EXISTING SIGNING
NC 127**

