

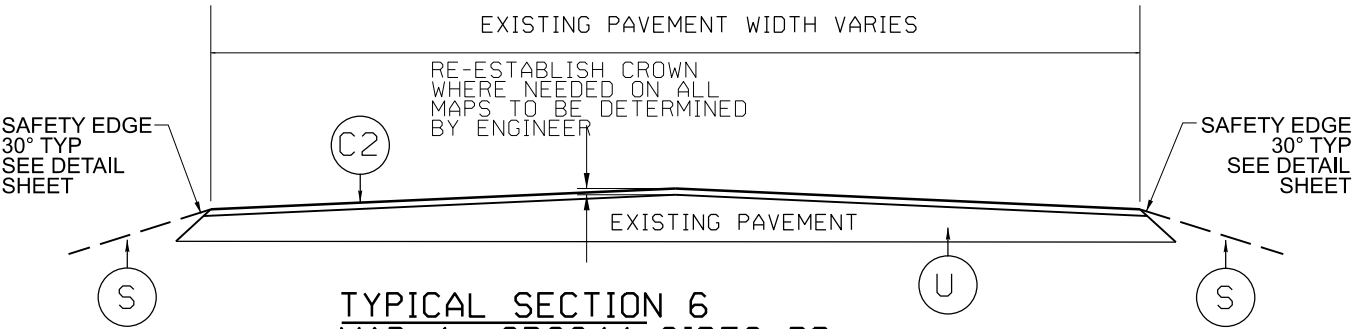


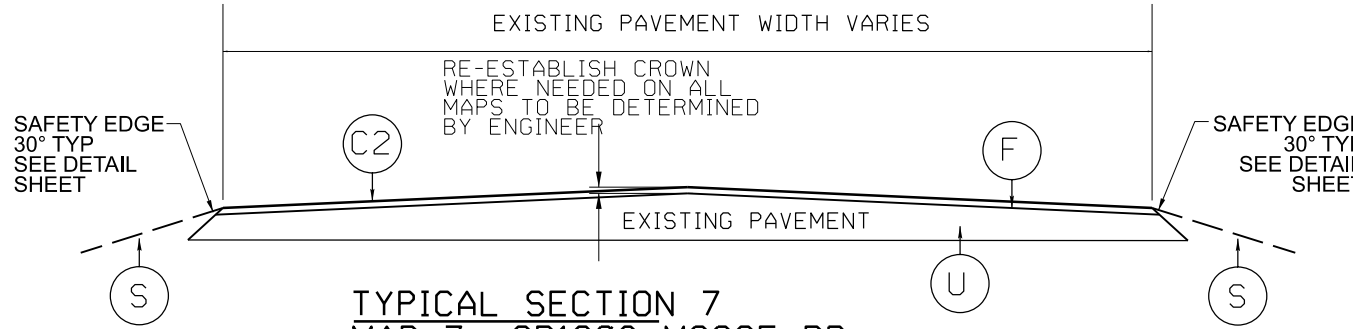

TYPICAL SECTION 6
MAP 4 SR2344 SIDES RD
MAP 5 SR2340 SIDES RD
MAP 6 SR2319 CRESCENT RD
MAP 10 SR2370 ST PETERS CHURCH RD
MAP 11 SR2570 ROY CLINE RD
MAP 13 SR2380 ST LUKES CHURCH RD
MAP 14 SR1337 LENTZ RD

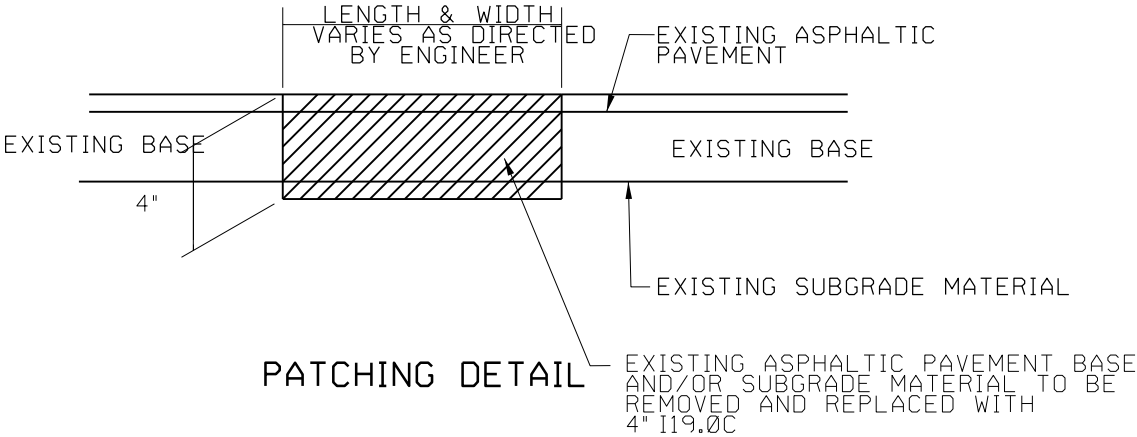

TYPICAL SECTION 7
MAP 7 SR1308 MOOSE RD
MAP 8 SR2561 CASTOR RD
MAP 9 SR2562 CASTOR RD
MAP 15 SR1243 DAUGHERTY RD

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
D	PROP. APPROX. 2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE 119C, TO BE APPLIED AT AN AVERAGE RATE OF 228 LBS PER SQ YD. LEVELING COURSE
F	ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE TO BE APPLIED AT AN AVERAGE OF 18 LBS/PER SQ YD. EMULSION RATE OF 0.38 GAL/PER SQ YD. ALL MATCOAT TO BE COVERED WITH ASPHALT CONCRETE SURFACE MIX BY END OF EACH WORK DAY
M1	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
M2	MILL ASPHALT PAVEMENT, 2" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT