
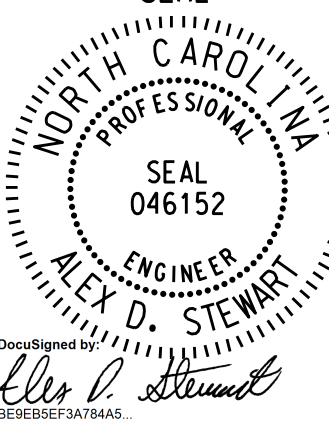



- NOTES:
1. FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE TOWN OF CARY TRANSPORTATION PROJECT MANAGER AT (919) 469-4203 TO ARRANGE FOR THE TOWN OF CARY TRANSPORTATION PROGRAM MANAGER TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE TOWN OF CARY TRANSPORTATION PROGRAM MANAGER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
  2. CONTRACTOR TO RECORD EXISTING SPlice ARRANGEMENT FOR COMPARISON TO THE SUPPLIED SPlice DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPlice ARRANGEMENT DIFFERS FROM THE SUPPLIED SPlice DETAILS.

DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

|  |   |  |   |             |
|--|---|--|---|-------------|
| <br>750 N. Greenfield Pkwy., Garner, NC 27529 | SIGNAL SYSTEM - TOWN OF CARY<br>COMMUNICATIONS CABLE AND<br>CONDUIT ROUTING PLANS |  |  |             |
|  | DIVISION 05   | WAKE   |   | MORRISVILLE |
|  | PLAN DATE: MARCH 2023   | REVIEWED BY:  |   |             |
|  | PREPARED BY: H.T. BERGGREN, E.I.  | DATE: 04/14/2023   |   |             |
| REVISIONS  |   | INIT.  | DATE  |             |
|  |   |  |   |             |
|  |   |  |   |             |
|  |   |  |   |             |