STATE	PROJECT NO.	SHEET NO.	TOTAL SHEETS
N.C.	2026CPT.10.15.10901 2026CPT.10.15.20901 2026CPT.10.15.20902	12	
F.A. PROJECT NO.			

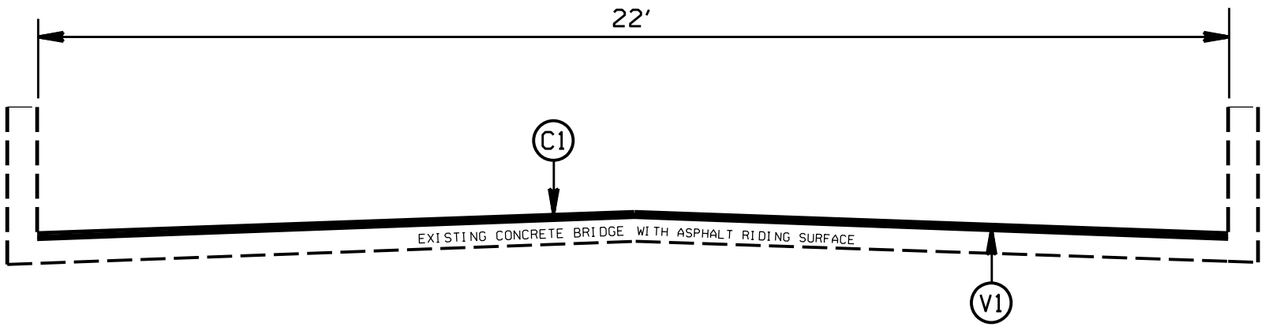

TYPICAL SECTION NO. 7
SR 1006 OLIVE BRANCH RD (MAP 4)
APPROX. STA. 87+43 TO STA. 88+43

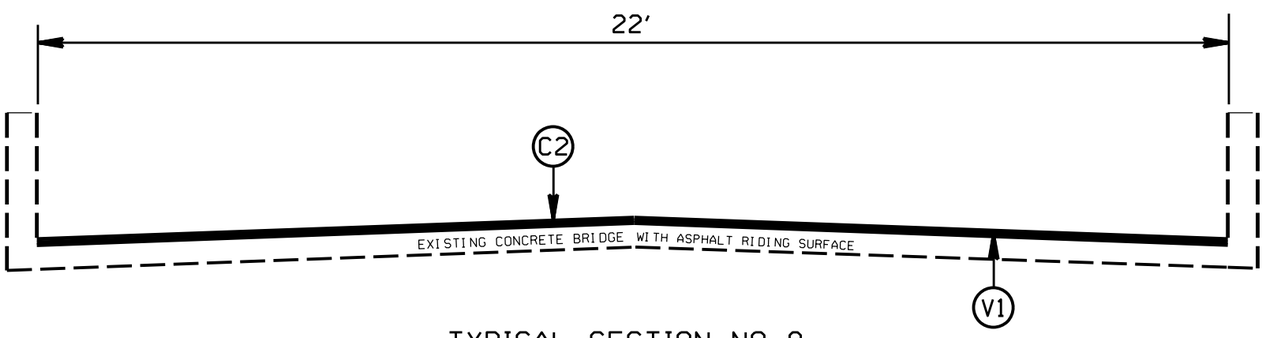

TYPICAL SECTION NO. 8
NC 205 (MAP 1)
APPROX. STA. 69+77 TO STA. 71+95
SR 1627 NEW SALEM RD (MAP 3)
APPROX. STA. 42+07 TO STA. 44+47
SR 1658 NEW HOPE CHURCH RD (MAP 5)
APPROX. STA. 63+09 TO STA. 63+99

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
E1	PROP. APPROX. 5.0" ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS PER SQ. YD.
F1	ASPHALT SURFACE TREATMENT, SINGLE SEAL
M	CENTERLINE MILLLED RUMBLE STRIPS
T1	SHOULDER RECONSTRUCTION
U	EXISTING PAVEMENT
V1	INCIDENTAL MILLING OF EXISTING ASPHALT RIDING SURFACE ON BRIDGE 1.5" DEPTH.
Z	FULL DEPTH RECLAMATION

2026
UNION COUNTY RESURFACING

		REVISIONS	
SCALE	-NA-		
DATE	11/23		
DWG. BY	AJB		
DESIGN BY	AJB		
APPROVED	CLA		