

TIP PROJECT: HB-0035

CONTRACT: C205194

# STATE OF NORTH CAROLINA DIVISION OF HIGHWAYS

## ROCKINGHAM COUNTY

LOCATION: *REPLACE BRIDGE #780177 ON SR 1535 (PRICE ROAD) OVER  
MATRIMONY CREEK IN EDEN*

TYPE OF WORK: *GRADING, DRAINAGE, PAVING & STRUCTURE*

TIP NO. <b>HB-0035</b>	SHEET NO. <b>SIGN-1</b>
APPROVED:  Signed by: <u>Faith E. Jahnke</u>	
DATE: <u>4/29/2026</u>	
SEAL 	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

### GENERAL NOTES

SIGNS FURNISHED BY STATE

WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER.

WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.

THE BACKGROUND FOR TYPE 'D' AND 'E' SIGNS SHALL BE TYPE 'C' REFLECTIVE SHEETING.

CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE THE ACTUAL DATE THE DEPARTMENT SIGNS WILL BE REQUIRED.

### ROADWAY STANDARD DRAWING

THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C. DATED JANUARY 2024 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS

### PAY ITEM NOTES

- |   |   |
|---|---|
| 1 | DISPOSAL OF SIGN SYSTEM, TYPE E                 |
| 2 | SIGN ERECTION, RELOCATE TYPE E (GROUND MOUNTED) |
| 3 | SIGN ERECTION, TYPE E (GROUND MOUNTED)          |
| 4 | RETAIN EXISTING                                 |

### SUMMARY OF QUANTITIES

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000-E	903	SUPPORTS, 3-LB STEEL U-CHANNEL	40	LF
410200000-N	904	SIGN ERECTION, TYPE E	3	EA
4116100000-N	904	SIGN ERECTION, RELOCATE TYPE E	1	EA
415500000-N	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	7	EA
4192000000-N	907	DISPOSAL OF SIGN SUPPORT, U-CHANNEL	1	EA

### INDEX


- |        |                      |
|--------|----------------------|
| SIGN-1 | TITLE SHEET          |
| SIGN-2 | TYPE "E" SIGNS SHEET |
| SIGN-3 | SIGN DETAIL SHEETS   |

Prepared in the Office of:


**SUMMIT**  
DESIGN AND ENGINEERING SERVICES  
FIRM NO. C-0176

1000 Social St., Suite 800,  
Raleigh, NC 27609  
Voice: (919) 732-3883  
Fax: (919) 732-4776  
www.summitde.net

FAITH JAHNKE, PE	PROJECT ENGINEER
DEVON HOYLE, EI	PROJECT DESIGNER

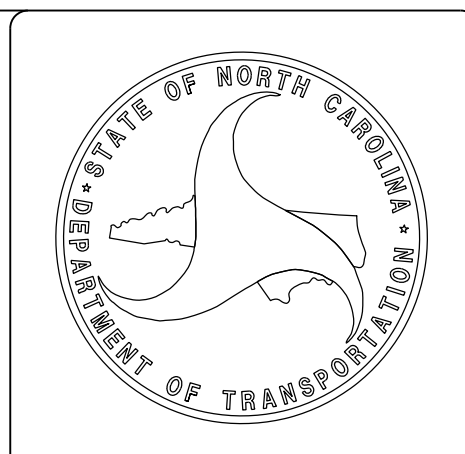


401 QUANTITY REQ'D 1

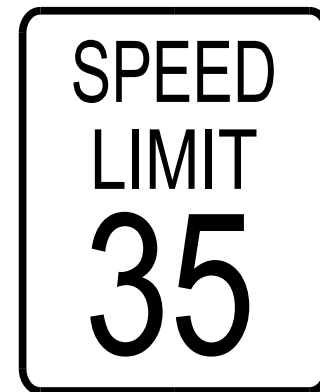


R2-1  
24" X 30"  
ONE U-CHANNEL POST PER SIGN

402 QUANTITY REQ'D 1

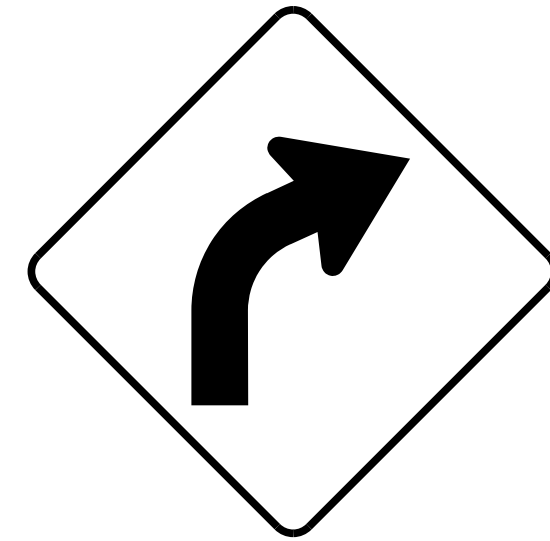

W1-2R  
30" X 30"  
ONE U-CHANNEL POST PER SIGN

403 QUANTITY REQ'D 1

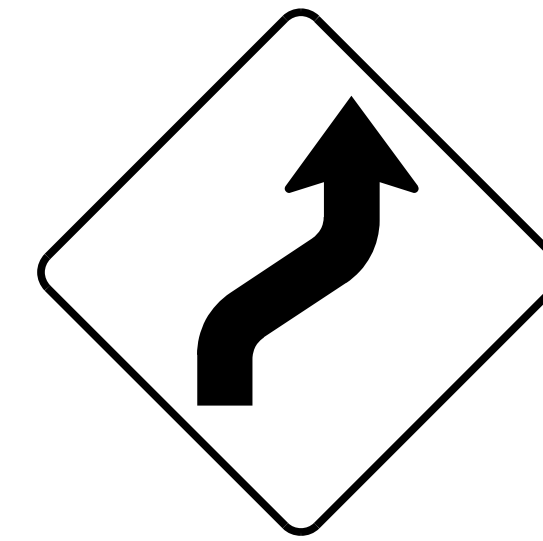


W1-4R  
30" X 30"  
ONE U-CHANNEL POST PER SIGN

TYPE "E" SIGNS

HB-0035


SIGN-2

NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
ROCKINGHAM COUNTY

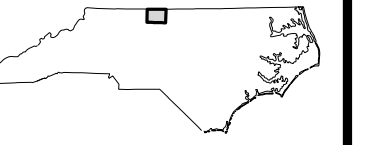

TRAFFIC CONTROL ENGINEER

12/29/2026

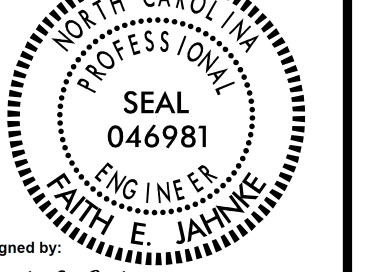

Signed by  
*Keith E. Jahnke*

DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

PLANS PREPARED BY



NC FIRM LICENSE No: C-5176  
1000 Social St. Suite 800.  
Raleigh, NC 27605  
(919) 732-3883  
(919) 732-6676 (FAX)

RELOCATE,  
-L- STA. 18+23+/-  
SEE NOTE 2  
ADOPT  
A  
HIGHWAY  
IMO WHITEY BURCHELL  
& BOBBY FOLEY

BEGIN PROJECT HB-0035  
-L- Sta. 17+25.00

SPEED  
LIMIT  
35  
R2-1  
24" X 30"  
REMOVE,  
SEE NOTE 1

SPEED  
LIMIT  
35  
401  
R2-1  
24" X 30"  
REPLACE  
-L- STA. 18+24+/-  
SEE NOTE 3

-L- 20+00

REMOVE,  
SEE NOTE 1  
OM-3R  
12" X 36"

REMOVE,  
SEE NOTE 1  
OM-3L  
12" X 36"

OM-3L  
12" X 36"  
REMOVE,  
SEE NOTE 1

OM-3R  
12" X 36"  
REMOVE,  
SEE NOTE 1

REMOVE,  
SEE NOTE 1  
W1-4R  
30" X 30"

-L- 25+00

REPLACE  
-L- STA. 24+07+/-  
SEE NOTE 3  
W1-4R  
30" X 30"  
403

STOP  
R1-1  
30" X 30"  
RETAIN  
-L- STA. 27+49+/-  
SEE NOTE 4

END PROJECT HB-0035  
-L- Sta. 27+30.00

-L- PRICE RD.  
(SR 1535)

REPLACE  
-L- STA. 24+40+/-  
SEE NOTE 3  
W1-2R  
30" X 30"  
402

REMOVE,  
SEE NOTE 1  
W1-2R  
30" X 30"

