

PROJECT REFERENCE NO.
U-5810

SHEET NO.
PMP-2

DocuSigned by:
David J. Seals
099183F28E5741E


APPROVED:

DATE: 7/2/2026

SEAL

NORTH CAROLINA
PROFESSIONAL
SEAL
044558
ENGINEER
DAVID T. SEALS

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

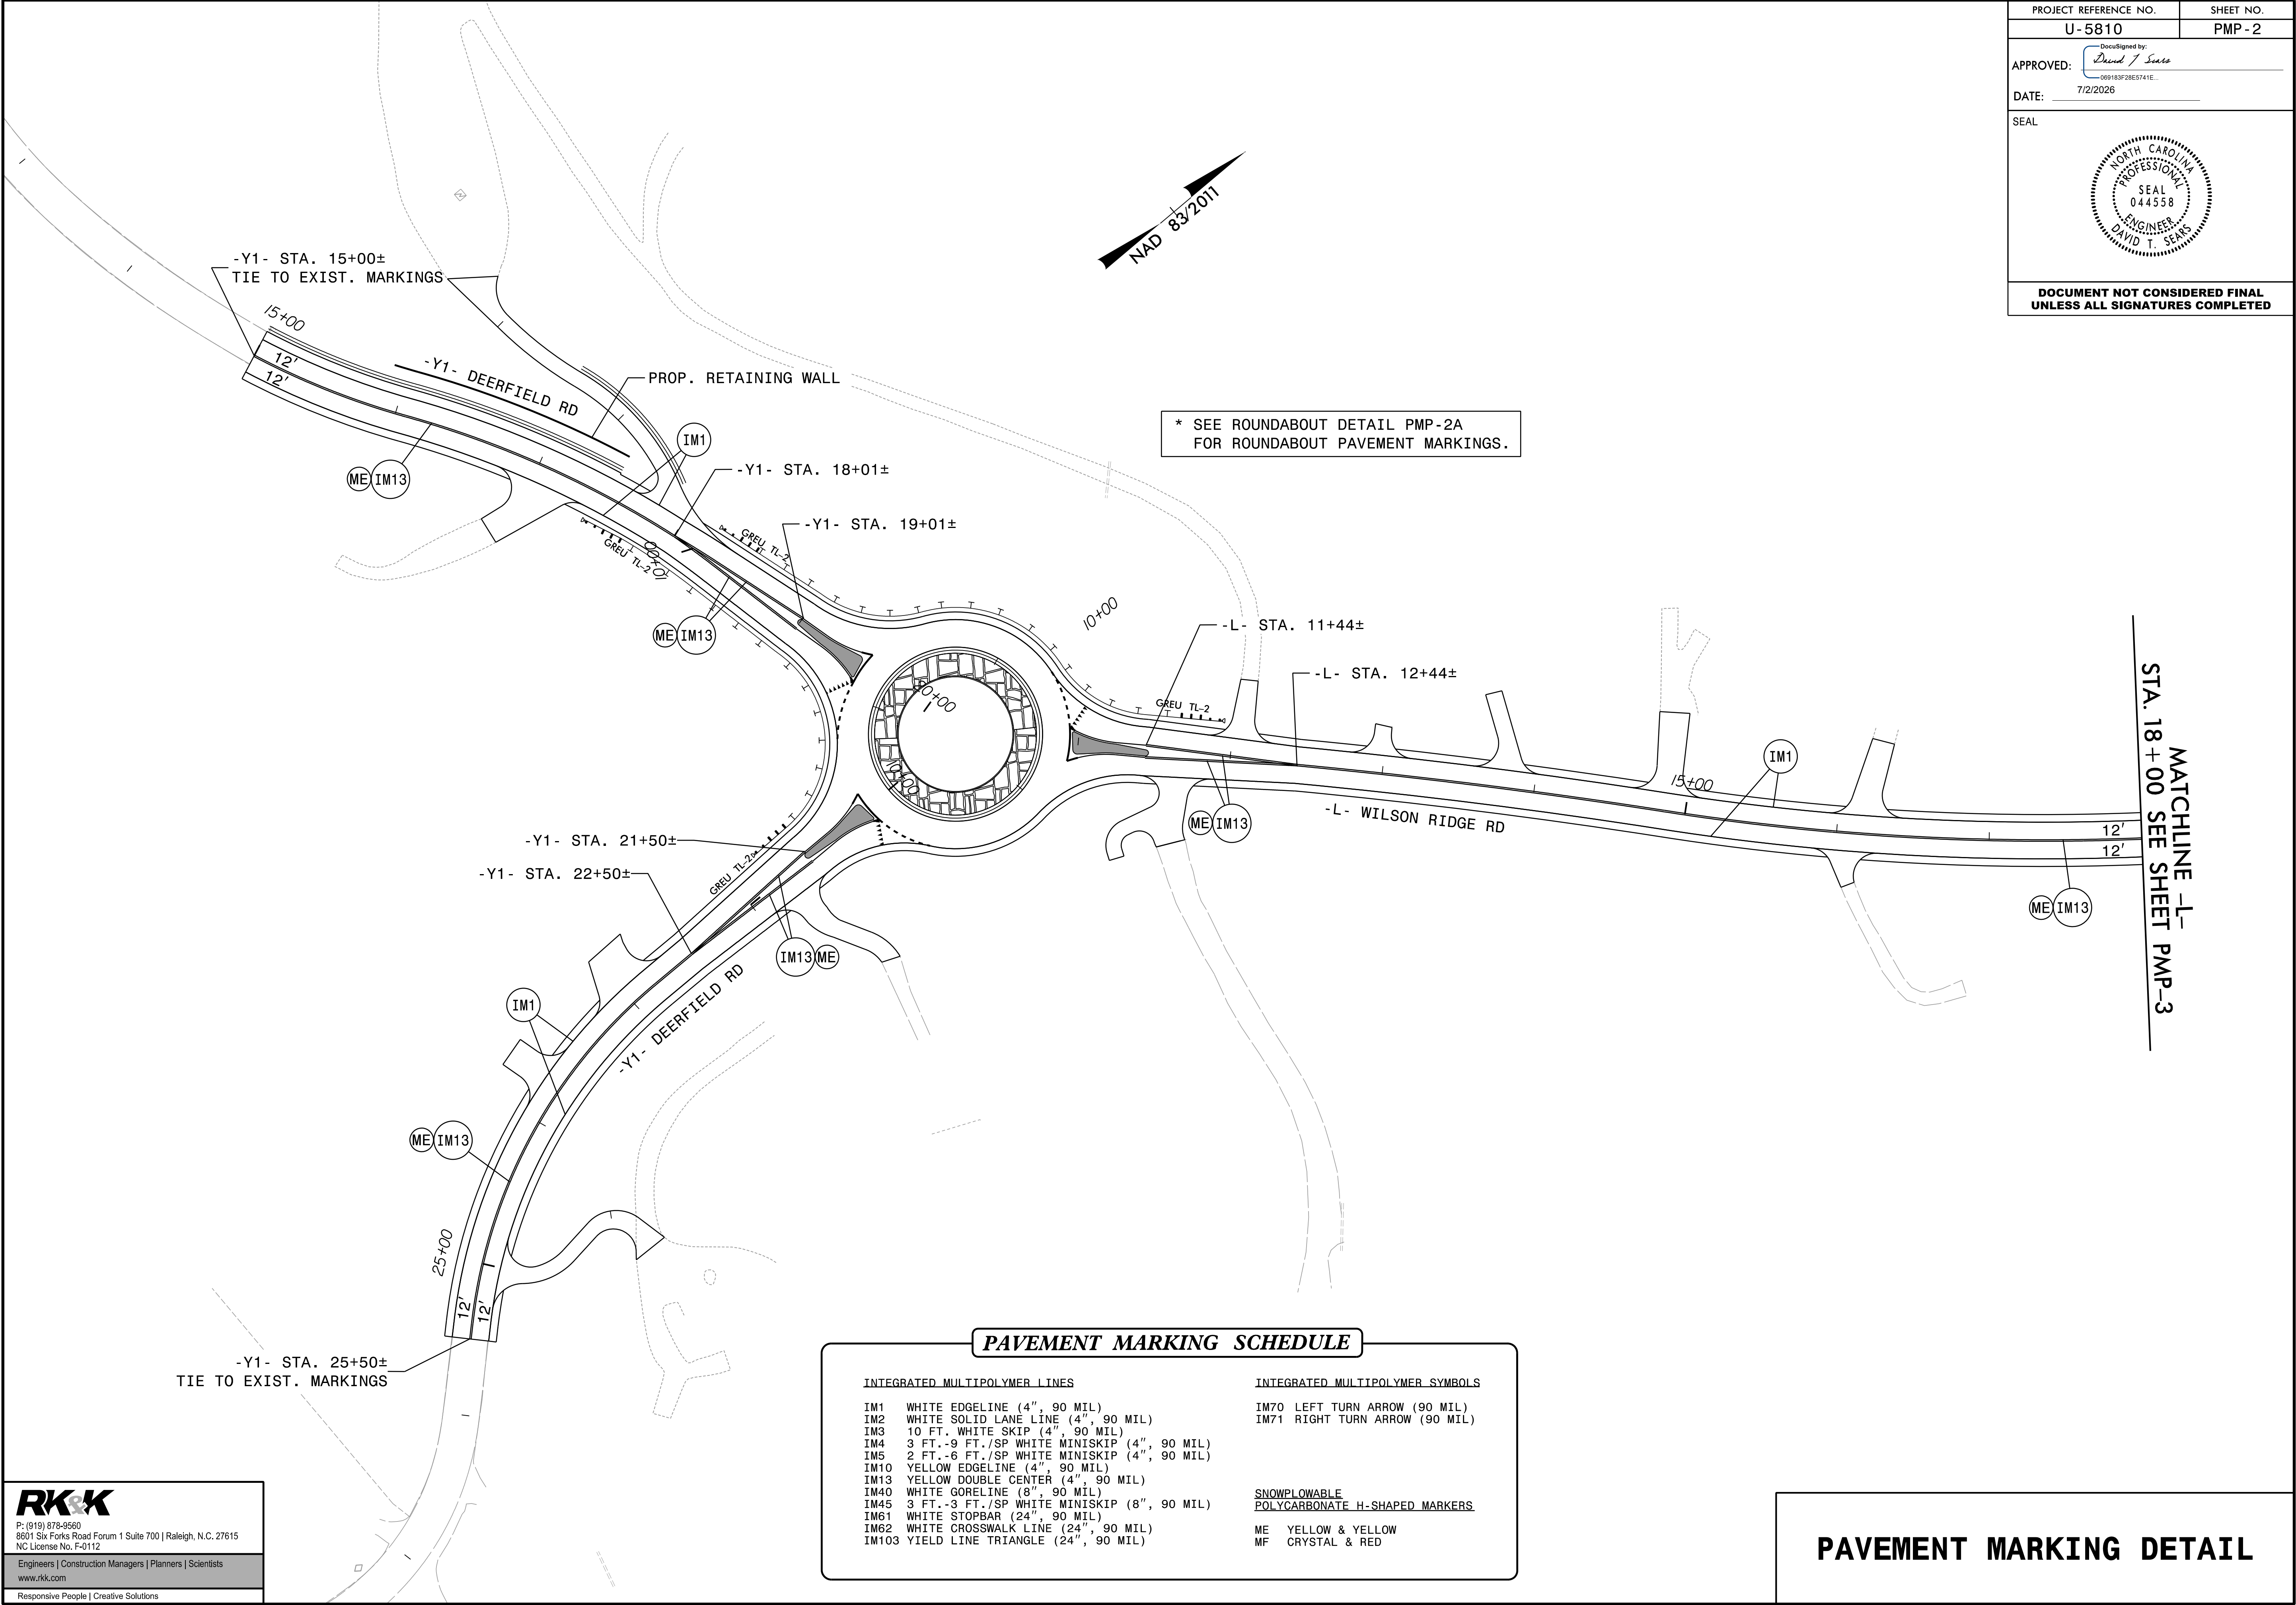

PAVEMENT MARKING SCHEDULE

INTEGRATED MULTIPOLYMER LINES

- IM1 WHITE EDGELINE (4", 90 MIL)
- IM2 WHITE SOLID LANE LINE (4", 90 MIL)
- IM3 10 FT. WHITE SKIP (4", 90 MIL)
- IM4 3 FT.-9 FT./SP WHITE MINISKIP (4", 90 MIL)
- IM5 2 FT.-6 FT./SP WHITE MINISKIP (4", 90 MIL)
- IM10 YELLOW EDGELINE (4", 90 MIL)
- IM13 YELLOW DOUBLE CENTER (4", 90 MIL)
- IM40 WHITE GORELINE (8", 90 MIL)
- IM45 3 FT.-3 FT./SP WHITE MINISKIP (8", 90 MIL)
- IM61 WHITE STOPBAR (24", 90 MIL)
- IM62 WHITE CROSSWALK LINE (24", 90 MIL)
- IM103 YIELD LINE TRIANGLE (24", 90 MIL)

INTEGRATED MULTIPOLYMER SYMBOLS

- IM70 LEFT TURN ARROW (90 MIL)
- IM71 RIGHT TURN ARROW (90 MIL)

- SNOWPLOWABLE
POLYCARBONATE H-SHAPED MARKERS
- ME YELLOW & YELLOW
 - MF CRYSTAL & RED

PAVEMENT MARKING DETAIL

RK&K

P: (919) 878-9560
8601 Six Forks Road Forum 1 Suite 700 | Raleigh, N.C. 27615
NC License No. F-0112

Engineers | Construction Managers | Planners | Scientists

www.rkk.com

Responsive People | Creative Solutions

SYTIME-6
EDGN6