

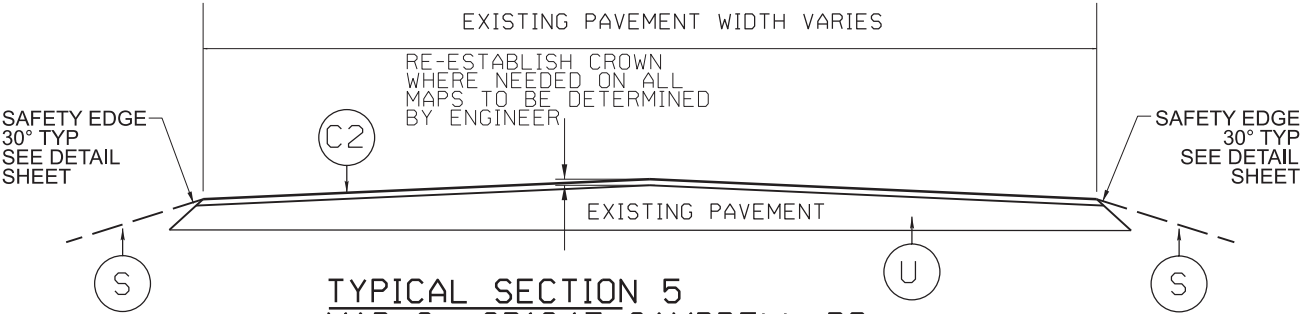


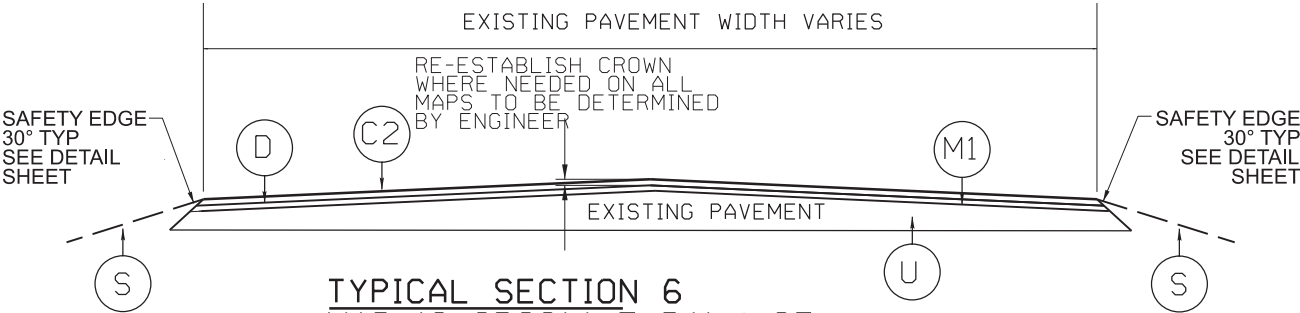

TYPICAL SECTION 5
MAP 9 SR1947 CAMPBELL RD
MAP 10 SR2489 ORGAN CHURCH RD

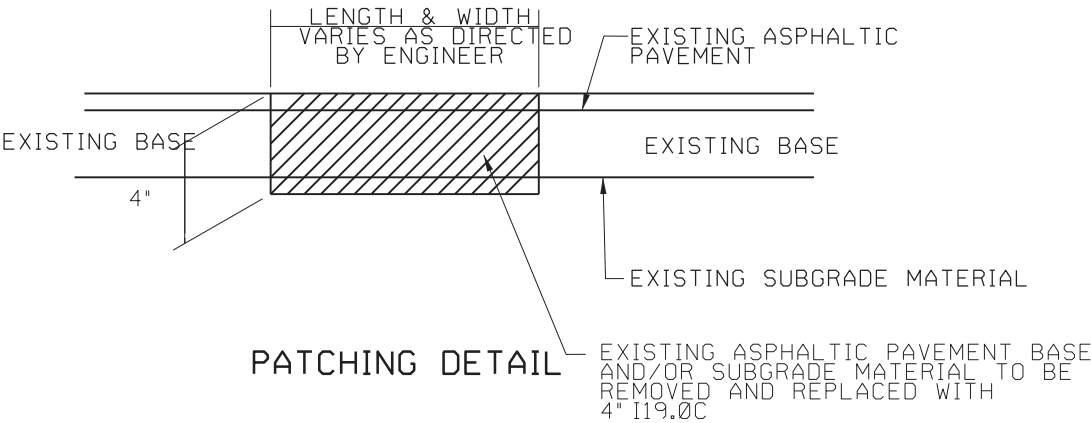

TYPICAL SECTION 6
MAP 13 SR2314 E BANK ST

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ YD.
D	PROP. APPROX. 2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19C, TO BE APPLIED AT AN AVERAGE RATE OF 228 LBS PER SQ YD.
F	ASPHALT SURFACE TREATMENT, MATCOAT, #67 STONE TO BE APPLIED AT AN AVERAGE OF 18 LBS/PER SQ YD. EMULSION RATE OF 0.38 GAL/PER SQ YD. ALL MATCOAT TO BE COVERED WITH ASPHALT CONCRETE SURFACE MIX BY END OF EACH WORK DAY
M1	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT