




NOTES:


- FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM INSTALLATION, CONTACT THE DIVISION 5 TRAFFIC ENGINEER AT (919)536-4000 TO ARRANGE FOR THE DOT TO PROGRAM THE NEW FIELD ETHERNET SWITCHES WITH THE NECESSARY NETWORK CONFIGURATION DATA, INCLUDING BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK AND VLAN ID INFORMATION. NOTIFY THE DIVISION TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
- BRIDGE MOUNTED CONDUIT SYSTEM WILL EXTEND OUTSIDE OF PAVED SHOULDER AND END IN BURIED JUNCTION BOX. SEE STRUCTURE PLAN FOR DETAILS AND LOCATION.

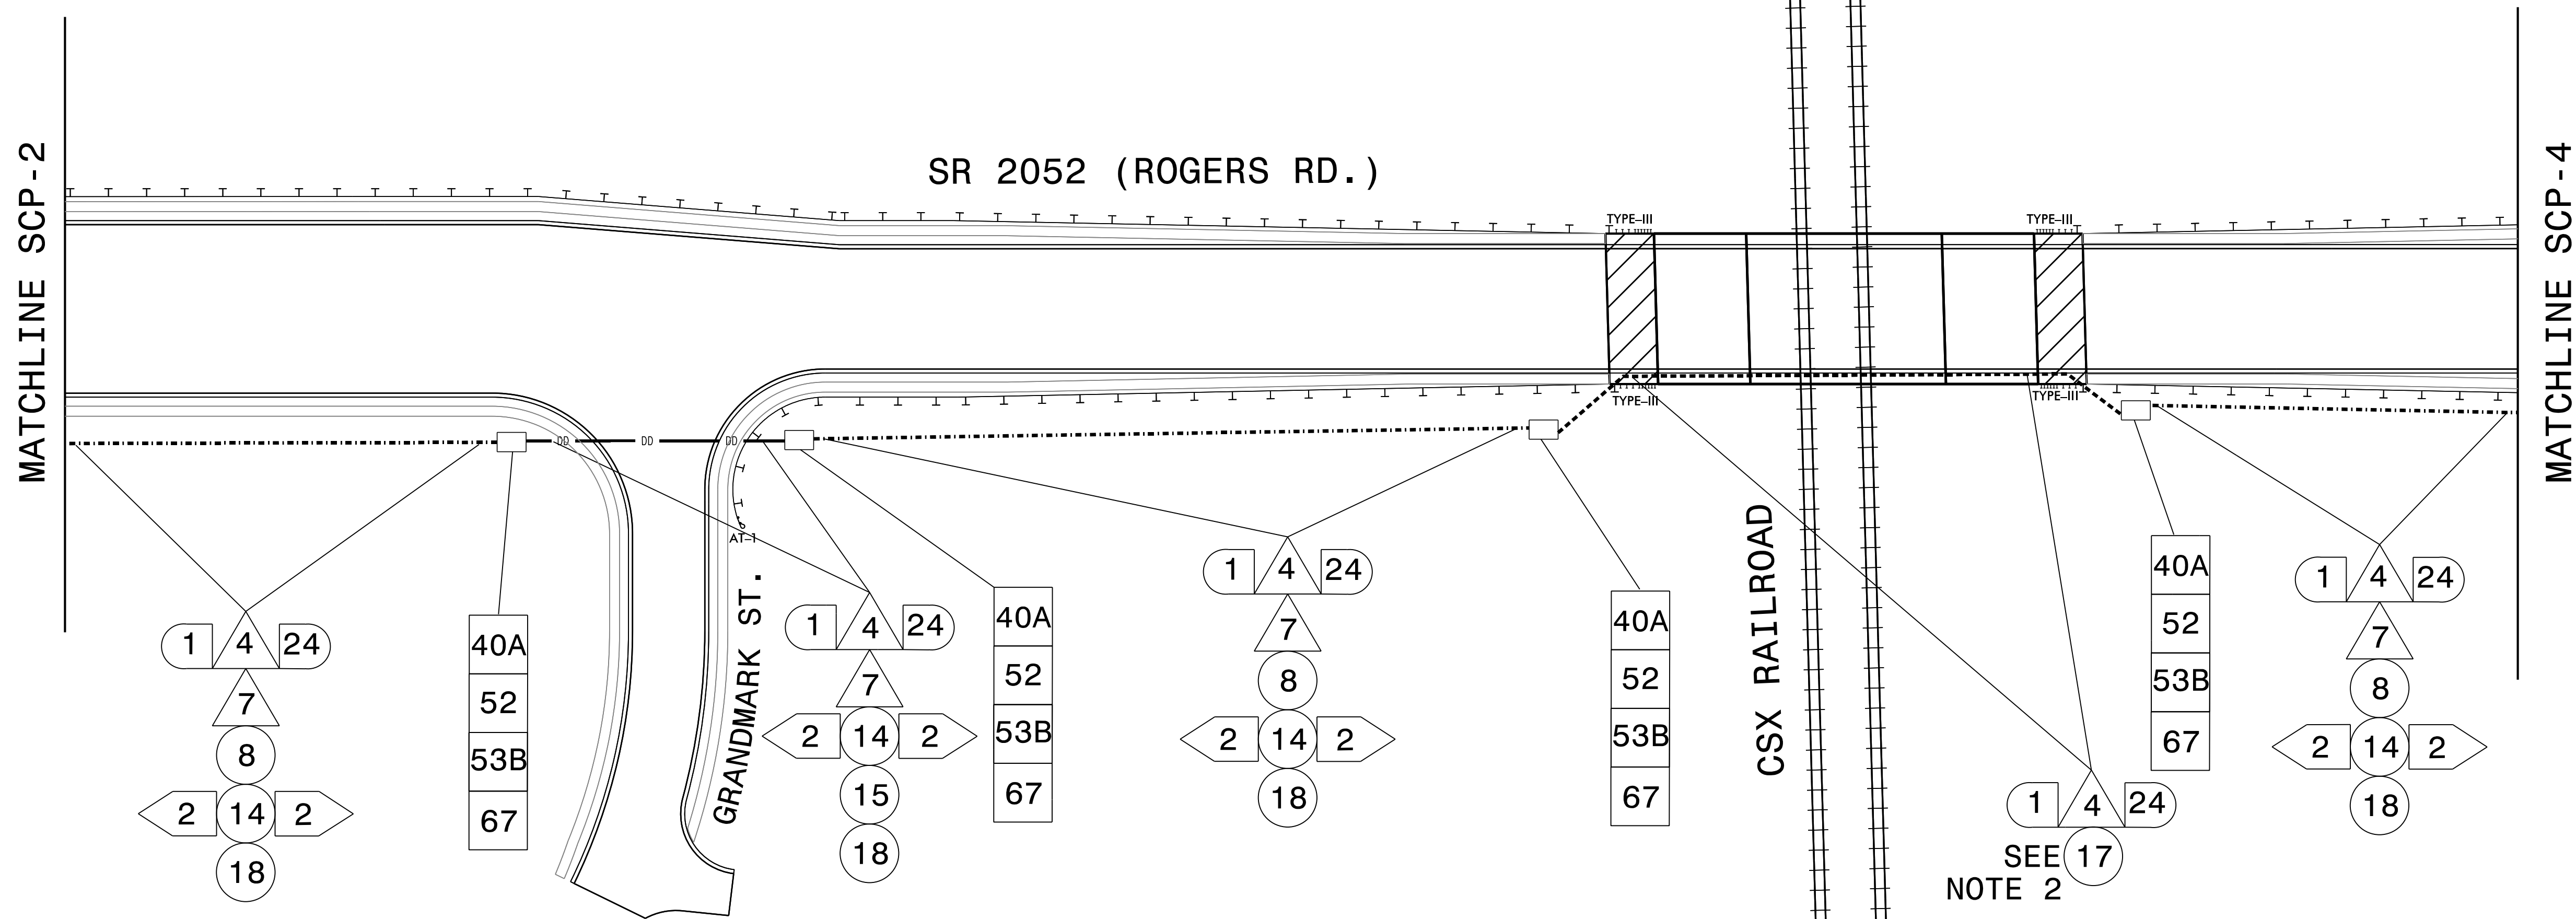

P: (919) 878-9560
8601 Six Forks Road, Forum 1, Suite 700
Raleigh, North Carolina 27615-3960
NC License No. F-0112

Engineers | Construction Managers | Planners | Scientists
www.rkk.com

Responsive People | Creative Solutions

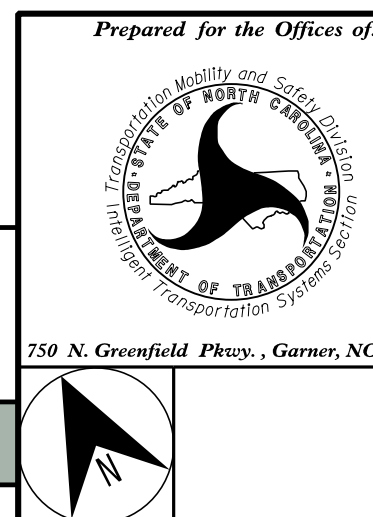

Wake Forest Signal System
P-5707
Signal Communication Plans

DIVISION 05 WAKE COUNTY WAKE FOREST
PLAN DATE: MARCH 2025 REVIEWED BY: DSEARS

PREPARED BY: WPJONES REVIEWED BY:

REVISIONS	INIT.	DATE

DOCUMENT NOT CONSIDERED
FINAL UNLESS ALL
SIGNATURES COMPLETED



DocuSigned by
David T. Sears
069183F2B5741E
SIGNATURE DATE
3/3/2025
CADD Filename: