


FIBER OPTIC CABLE

MODIFY SPLICE ENCLOSURE
FOR SIGNAL #05-2271
SHEET SCP 6

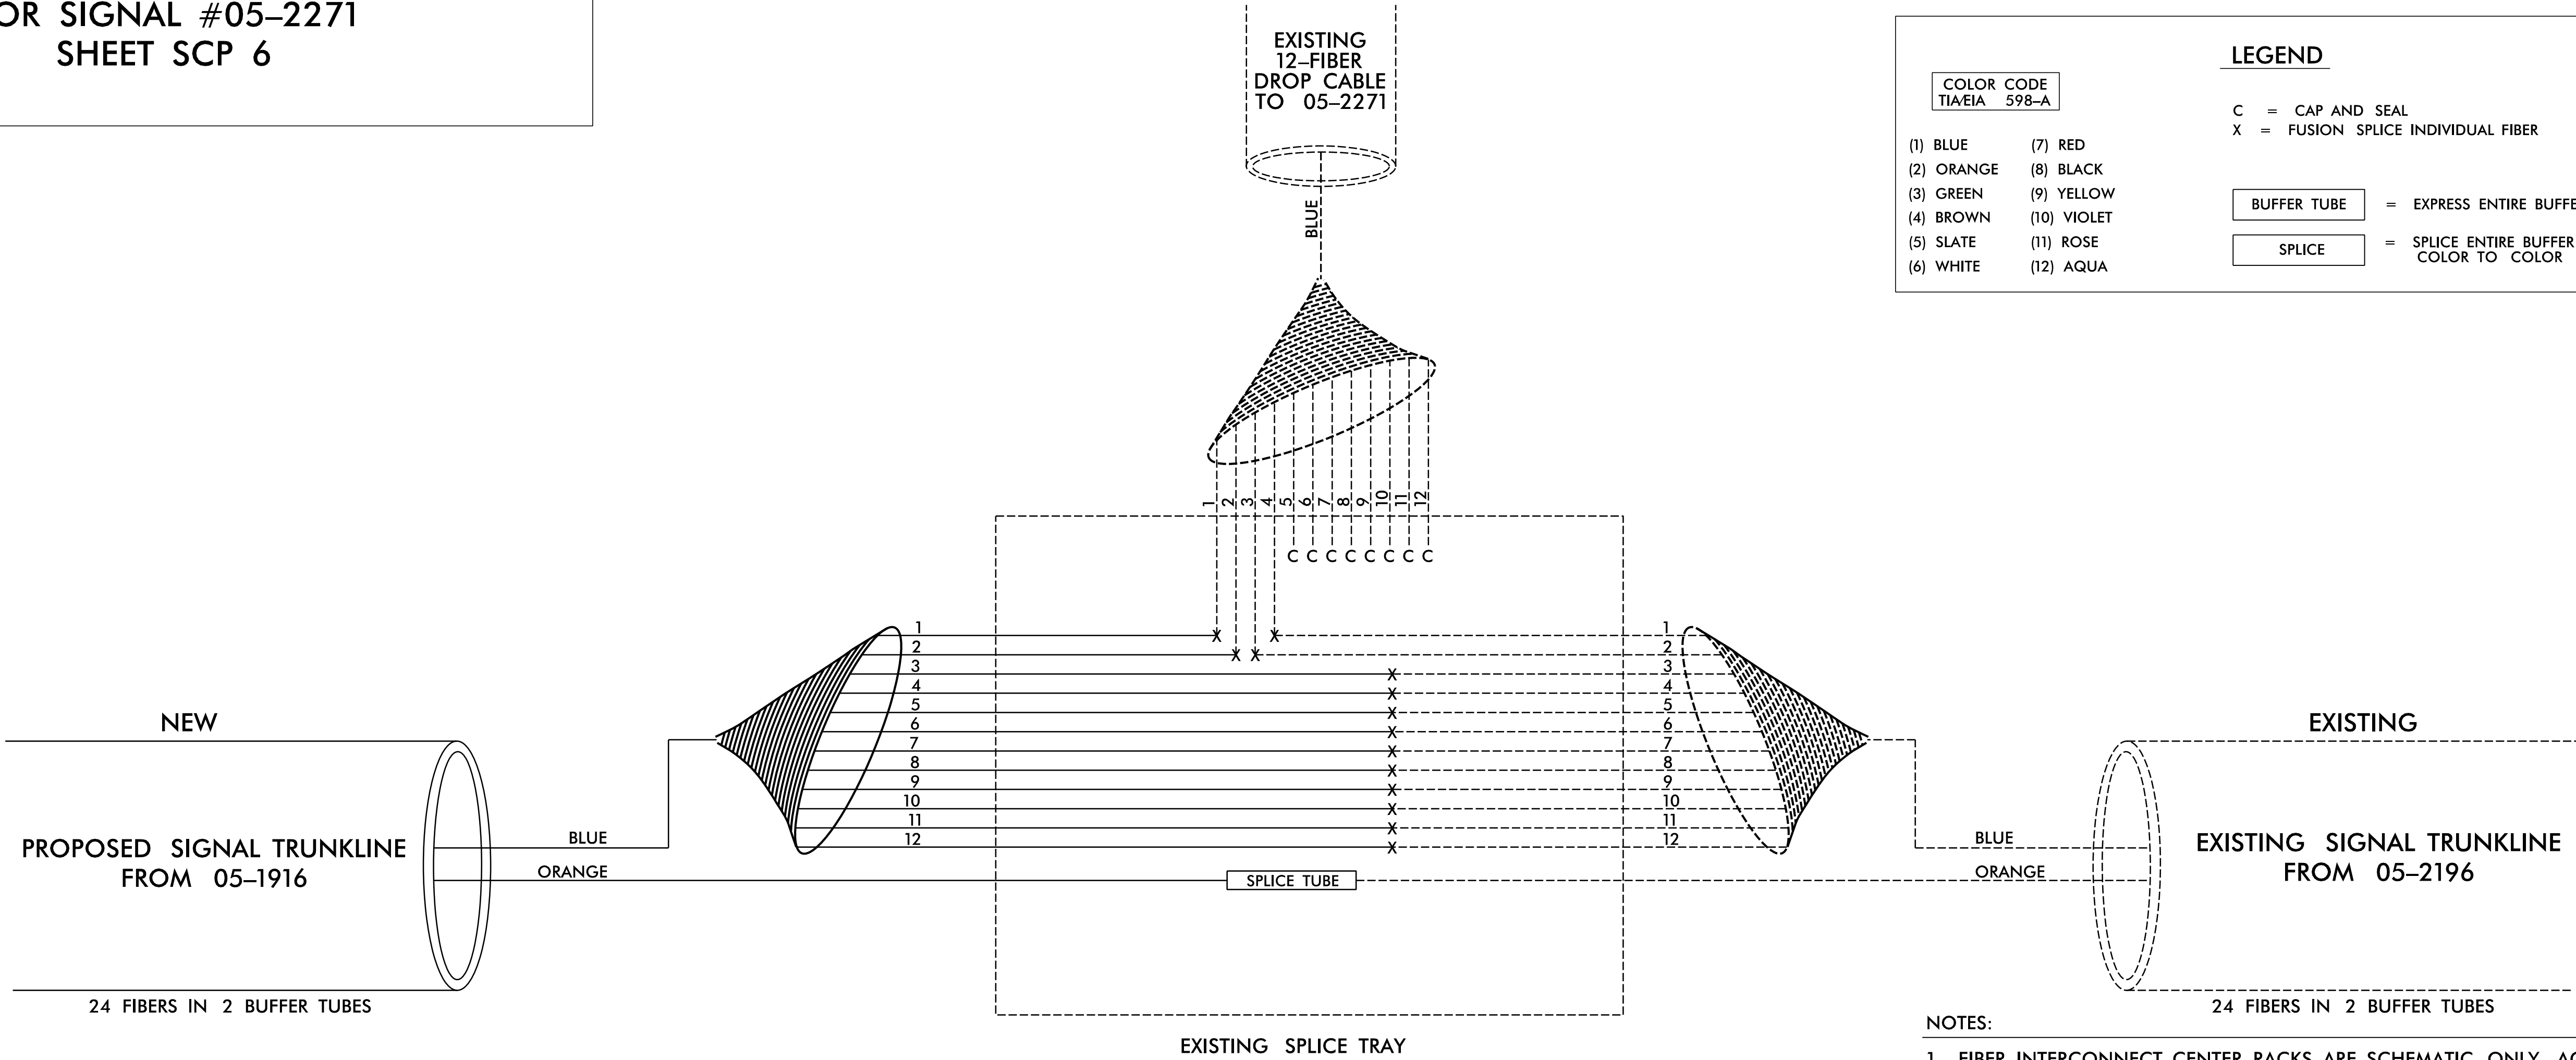

- NOTES:
1. FIBER INTERCONNECT CENTER RACKS ARE SCHEMATIC ONLY, ACTUAL EQUIPMENT FORM MAY VARY.
 2. UNUSED FIBERS LEFT COILED AND STORED IN SPLICE TRAY.
 3. UNUSED BUFFER TUBES LEFT COILED AND STORED IN SPLICE TRAY.
 4. FIVE (5) DAYS PRIOR TO BEGINNING WORK ON THE SIGNAL SYSTEM, CONTACT THE DIVISION 5 TRAFFIC ENGINEER AT (919)536-4000 TO ARRANGE FOR NCDOT TO PROGRAM THE NEW FIELD ETHERNET SWITCH WITH THE NECESSARY NETWORK CONFIGURATION DATA INCLUDING, BUT NOT LIMITED TO: THE PROJECT IP ADDRESS, DEFAULT GATEWAY, SUBNET MASK, AND VLAN ID INFORMATION. NOTIFY THE TRAFFIC ENGINEER AFTER ALL WORK IS PERFORMED TO ENSURE THAT ALL FIBER CIRCUITS ARE FUNCTIONING PROPERLY. WORK IS NOT COMPLETE UNTIL THE SIGNAL SYSTEM IS BACK UP AND OPERATIONAL.
 5. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING EXISTING SPLICING. CONTRACTOR TO RECORD EXISTING SPLICE ARRANGEMENTS FOR COMPARISON TO THE SUPPLIED SPLICE DETAILS. IF DISCREPANCIES EXIST, CONTACT THE ENGINEER TO DETERMINE HOW TO PROCEED WITH RESPLICING. PROVIDE AS-BUILT PLANS TO THE ENGINEER IF FINAL SPLICE ARRANGEMENTS DIFFER FROM THE SUPPLIED SPLICE DETAILS.
 6. ETHERNET SWITCH TERMINATION CONFIGURATIONS ARE GENERIC. CONTRACTOR IS RESPONSIBLE FOR DETERMINING /ENSURING PROPER TERMINATION.
 7. INCLUDE ON THE COVER OF EACH SPLICE TRAY THE FOLLOWING:
(1) SPLICE
(2) DATE
(3) COMPANY NAME
(4) NAME OF INDIVIDUAL PERFORMING THE SPLICING
- PRIOR TO INSTALLING THE COVER ON THE SPLICE TRAY, TAKE A DIGITAL PHOTOGRAPH SHOWING THE SPLICE TRAY AND INFORMATION SHOWN ABOVE (1-4) AND SUBMIT PHOTOGRAPH ALONG WITH OTDR TEST RESULTS TO THE ENGINEER.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED