

PROJECT NO.	SHEET NO.
2027CPT.13.04.20111	18

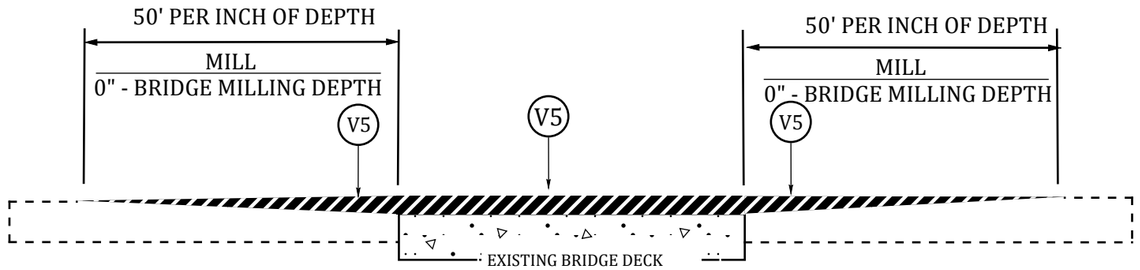


MILLING DETAIL AT BRIDGE APPROACHES

WHERE BRIDGES WILL BE MILLED THEN RESURFACED.
THIS WILL BE PAID FOR AS INCIDENTAL MILLING.
USE AT BRIDGE NUMBER: 117 MAP 8.

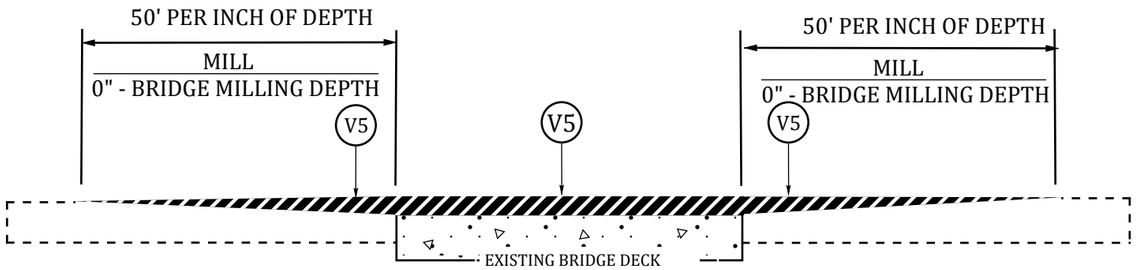

MILLING DETAIL AT BRIDGE APPROACHES

WHERE BRIDGES WILL BE MILLED THEN RESURFACED.
THIS WILL BE PAID FOR AS INCIDENTAL MILLING.
USE AT BRIDGE NUMBER: 100 MAP 11.

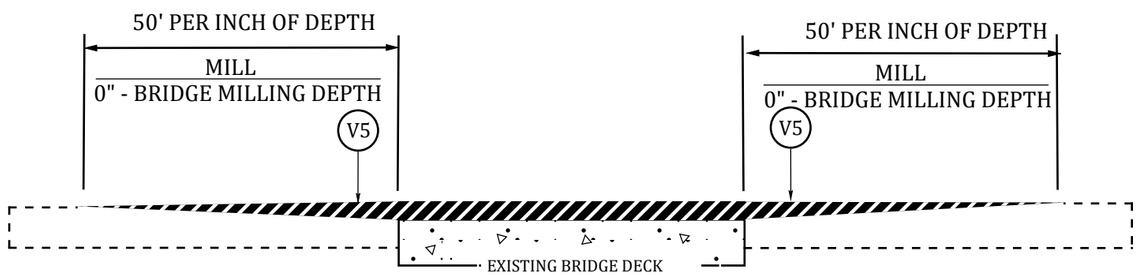

* COORDINATE WITH BRIDGE MAINTENANCE TO REMOVE EXISTING ASPHALT 15 DAYS BEFORE RESURFACING BEGINS.

MILLING DETAIL AT BRIDGE APPROACHES

WHERE BRIDGES WILL BE MILLED THEN RESURFACED.
THIS WILL BE PAID FOR AS INCIDENTAL MILLING.
USE AT BRIDGE NUMBER: 177 MAP 22.

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1-1/4" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YARD
C2	PROP. APPROX. 1-1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YARD
P1	PATCHING ONLY
T1	SHOULDER RECONSTRUCTION
V2	MILLING ASPHALT PAVEMENT 1-1/2" DEPTH
V3	MILLING ASPHALT PAVEMENT 0" TO 1-1/4"
V4	MILLING ASPHALT PAVEMENT 0" TO 1-1/2"
V5	INCIDENTAL MILLING