
Docusign Envelope ID: 68D05315-339F-8877-826C-A54DFA71DCDF

PROJECT REFERENCE NO.	SHEET NO.
U-3422B	Sig-2.1

18 CHANNEL CONFLICT MONITOR PROGRAMMING DETAIL

(remove jumpers and set switches as shown)

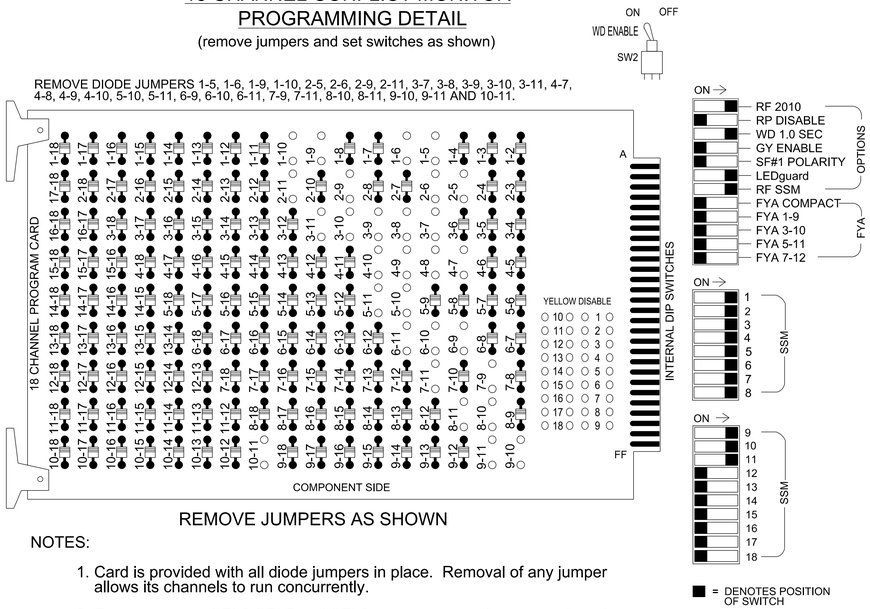

REMOVE JUMPERS AS SHOWN

NOTES:

1. Card is provided with all diode jumpers in place. Removal of any jumper allows its channels to run concurrently.
2. Ensure jumpers SEL2-SEL5 and SEL9 are present on the monitor board.
3. Ensure that the Red Enable is active at all times during normal operation.
4. Connect serial cable from conflict monitor to comm. port 1 of 2070 controller. Ensure conflict monitor communicates with 2070.

NOTES

1. To prevent "flash-conflict" problems, insert red flash program blocks for all vehicle load switches in the output file. The installer shall verify that signal heads flash in accordance with the signal plan.
2. Program controller to start up in phase 2 Green No Walk and phase 6 Green No Walk.
3. If this signal will be managed by an ATMS software, enable controller and detector logging for all detectors used at this location.
4. The cabinet and controller are part of the Camden Road Closed Loop Signal System.

SIGNAL HEAD HOOK-UP CHART

LOAD SWITCH NO.	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11	S12	AUX S1	AUX S2	AUX S3	AUX S4	AUX S5	AUX S6
CMU CHANNEL NO.	1	2	13	3	4	14	5	6	15	7	8	16	9	10	17	11	12	18
PHASE	1	2	2 PED	3	4	4 PED	5	6	6 PED	7	8	8 PED	OL1	OL2	OL5	OL3	OL4	OL6
SIGNAL HEAD NO.	11	21,22	NU	31	41,42	NU	51	61,62	NU	71	81,82	NU	63	83★	NU	23	NU	NU
RED		128			101			134			107		A121	A124		A114		
YELLOW		129			102			135			108							
GREEN		130			103			136			109							
RED ARROW	125			116			131			122								
YELLOW ARROW	126			117			132			123			A122	A125		A115		
FLASHING YELLOW ARROW														A126				
GREEN ARROW	127			118			133			124			A123			A116		

NU = Not Used


★See pictorial of head wiring in detail this sheet.

EQUIPMENT INFORMATION

Controller.....2070LX
Cabinet.....332 w/ Aux
Software.....Q-Free MAXTIME
Cabinet Mount.....Base
Output File Positions.....18 With Aux. Output File
Load Switches Used.....S1, S2, S4, S5, S7, S8, S10, S11, AUX S1, AUX S2, AUX S4
Phases Used.....1, 2, 3, 4, 5, 6, 7, 8
Overlap "1".....*
Overlap "2".....*
Overlap "3".....*
Overlap "4".....NOT USED
*See overlap programming detail sheet 2.

FYA SIGNAL WIRING DETAIL


(wire signal head as shown)



83

INPUT FILE POSITION LAYOUT

(front view)

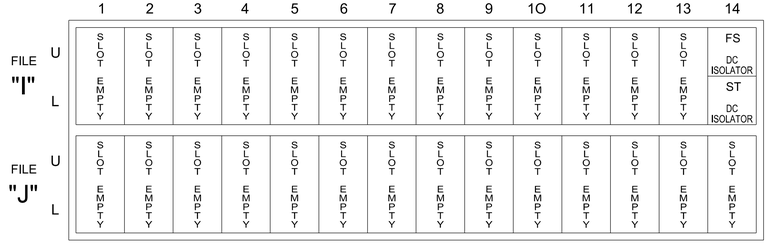

INPUT FILE CONNECTION & PROGRAMMING CHART

LOOP NO.	LOOP TERMINAL	INPUT FILE POS.	PIN NO.	INPUT POINT	DETECTOR NO.	CALL PHASE	DELAY TIME	EXTEND TIME	EXTEND	ADDED INITIAL	CALL	DELAY DURING GREEN
1A	-	-	-	*	33	1	3.0		X		X	
1B	-	-	-	*	49	1	15.0		X		X	
2A	-	-	-	*	38	2			X		X	
3A	-	-	-	*	34	3			X		X	
4A	-	-	-	*	44	4	10.0		X		X	
4B	-	-	-	*	45	4	15.0		X		X	
5A	-	-	-	*	35	5	3.0		X		X	
6A	-	-	-	*	54	6			X		X	
7A	-	-	-	*	36	7			X		X	
8A	-	-	-	*	60	8			X		X	

* For Input Point numbers, see SDLC Non-Intrusive Detection Chart detail on sheet 2.

INPUT FILE POSITION LEGEND: J2L
FILE J
SLOT 2
LOWER

MAXTIME STARTUP AND SOFTWARE FLASH PROGRAMMING DETAIL

Front Panel
Main Menu>Controller>Unit

Web Interface
Home>Controller>Unit

Start Up Parameters
Startup Clearance Hold
6

Unit Flash Parameters
All Red Flash Exit Time
6

SPECIAL DETECTOR NOTE

Install a multizone microwave detection system for vehicle detection. Perform installation according to the manufacturer's directions and NCDOT engineer approved mounting locations to accomplish the detection schemes shown on the Signal Design Plans.

Plans Prepared By:

DRMP

DRMP, Inc.
8210 University Executive Park Dr, Suite 220
Charlotte, NC 28262
NC License No. F-1524 (704) 549-4260

THIS PLAN SUPERSEDES THE PLAN SEALED ON 12/22/2023

THIS ELECTRICAL DETAIL IS FOR
THE SIGNAL DESIGN: 06-1407T1
DESIGNED: Sep 2026
SEALED: 09/11/2026
REVISED: N/A

Electrical Detail - Sheet 1 of 2
Temporary Design 1 - (TMP Phase II)

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

ELECTRICAL AND PROGRAMMING DETAILS FOR:

Prepared for:

Transportation Mobility and Safety Division
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
Traffic Engineering Branch
Signals Management Section

750 N.Greenfield Pkwy,Garner,NC 27529

SR 1003 (Camden Road)
at
SR 1112 (Rockfish Road) / Applegate Road

Division 6 Cumberland County Hope Mills

PLAN DATE: September 2026 REVIEWED BY: BN Groome
PREPARED BY: DS Griffith DRMP PROJ. NO: 24941 (040)

REVISIONS	INIT.	DATE

SEAL
NORTH CAROLINA PROFESSIONAL SEAL 052936 ENGINEER BRITTANY N GROOME

Signed by: Brittany Groome
1E09340E1094484...
09/11/2026
SIGNATURE DATE

SIG. INVENTORY NO. 06-1407TI