

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	WBS NO. 17BP.13.R.108	1	8

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. WBS NO. 17BP.13.R.108 F.A. PROJ. _____
COUNTY RUTHERFORD
PROJECT DESCRIPTION DIVISION 13
LOW IMPACT BRIDGE REPLACEMENT

SITE DESCRIPTION BRIDGE NO. 38 ON NC 108
(TRYON ROAD) OVER MOUNTAIN CREEK

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2, 2A	LEGEND
3	BORING LOCATION MAP
4-7	BORE LOGS

PERSONNEL

R. DeLOST

F. WOODARD

C. WARD

INVESTIGATED BY R. DeLOST

CHECKED BY S. PROVANCE

SUBMITTED BY S. PROVANCE

DATE 8/14/2012

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF PREPARING THE SCOPE OF WORK TO BE INCLUDED IN THE REQUEST FOR PROPOSAL. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 250-4088. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.


SOIL AND ROCK BOUNDARIES WITHIN A BOREHOLE ARE BASED ON GEOTECHNICAL INTERPRETATION UNLESS ENCOUNTERED IN A SAMPLE. INTERPRETED BOUNDARIES MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLED STRATA, AND BOREHOLE INFORMATION MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

DRAWN BY: T. RIDEOUT

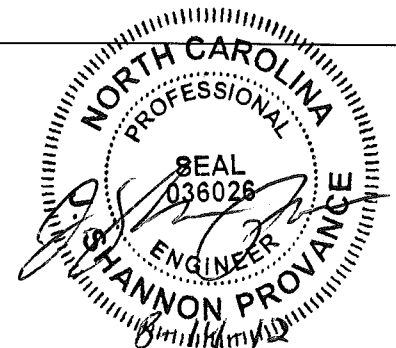

PROJECT REFERENCE NO.	SHEET NO.
WBS NO. 17BP.13.R.108	2

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION												GRADATION											
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>												WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.											
SOIL LEGEND AND AASHTO CLASSIFICATION												ANGULARITY OF GRAINS											
MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.												THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS ANGULAR , SUBANGULAR , SUBROUNDED , OR ROUNDED .											
MINERALOGICAL COMPOSITION												COMPRESSIONIBILITY											
MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.												SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE											
PERCENTAGE OF MATERIAL												GROUND WATER											
ORGANIC MATERIAL GRANULAR SOILS SILT - CLAY SOILS OTHER MATERIAL TRACE OF ORGANIC MATTER 2 - 3% 3 - 5% TRACE 1 - 10% LITTLE ORGANIC MATTER 3 - 5% 5 - 12% LITTLE 10 - 20% MODERATELY ORGANIC 5 - 10% 12 - 20% SOME 20 - 35% HIGHLY ORGANIC >10% >20% HIGHLY 35% AND ABOVE												WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP											
CONSISTENCY OR DENSENESS												MISCELLANEOUS SYMBOLS											
PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²) GENERALLY GRANULAR MATERIAL (NON-COHESIVE) VERY LOOSE 4 TO 10 0.25 TO 0.50 MEDIUM DENSE 10 TO 30 0.5 TO 1.0 DENSE 30 TO 50 1 TO 2 VERY DENSE >50 >2 GENERALLY SILT-CLAY MATERIAL (COHESIVE) VERY SOFT 2 TO 4 0.25 TO 0.50 MEDIUM STIFF 4 TO 8 0.5 TO 1.0 STIFF 8 TO 15 1 TO 2 VERY STIFF 15 TO 30 2 TO 4 HARD >30 >4												ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES SPT TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD											
TEXTURE OR GRAIN SIZE												ABBREVIATIONS											
U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.75 2.00 0.42 0.25 0.075 0.053												AR - AUGER REFUSAL MED. - MEDIUM BT - BORING TERMINATED MICA - MICACEOUS CL - CLAY MOD. - MODERATELY CPT - CONE PENETRATION TEST NP - NON PLASTIC CSE. - COARSE ORG. - ORGANIC DMT - DILATOMETER TEST PMT - PRESSUREMETER TEST DPT - DYNAMIC PENETRATION TEST SAP. - SAPROLITIC - VOID RATIO SD. - SAND, SANDY F - FINE SL. - SILT, SILTY FOSS. - FOSSILIFEROUS SLI. - SLIGHTLY FRAC. - FRACTURED, FRACTURES TCR - TRICONE REFUSAL FRAGS. - FRAGMENTS - MOISTURE CONTENT HI. - HIGHLY V - VERY											
SOIL MOISTURE - CORRELATION OF TERMS												SAMPLE ABBREVIATIONS											
SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION LL - LIQUID LIMIT - SATURATED - (SAT.) USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE PL - PLASTIC LIMIT - WET - (W) SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE OM - OPTIMUM MOISTURE - MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE SL - SHRINKAGE LIMIT - DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE												S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO											
PLASTICITY												EQUIPMENT USED ON SUBJECT PROJECT											
PLASTICITY INDEX (PI) DRY STRENGTH NONPLASTIC 0-5 VERY LOW LOW PLASTICITY 6-15 SLIGHT MED. PLASTICITY 16-25 MEDIUM HIGH PLASTICITY 26 OR MORE HIGH												DRILL UNITS: ADVANCING TOOLS: HAMMER TYPE: ☐ MOBILE B- ☐ CLAY BITS ☒ AUTOMATIC ☐ MANUAL ☐ BK-51 ☐ 6" CONTINUOUS FLIGHT AUGER ☒ CME-45C ☒ 8" HOLLOW AUGERS ☐ CME-550 ☐ HARD FACED FINGER BITS ☐ PORTABLE HOIST ☐ TUNG.-CARBIDE INSERTS ☐ CASING ☐ W/ ADVANCER ☐ TRICONE ' STEEL TEETH ☐ TRICONE ' TUNG.-CARB. ☐ CORE BIT ☐											
COLOR												HAND TOOLS:											
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.												☐ POST HOLE DIGGER ☐ HAND AUGER ☐ SOUNDING ROD ☐ VANE SHEAR TEST											

		PROJECT REFERENCE NO. WBS NO. 17BP.13.R.108		SHEET NO. 2A	
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS					
ROCK DESCRIPTION			TERMS AND DEFINITIONS		
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:			<u>ALLUVIUM (ALLUV.)</u> - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. <u>AQUIFER</u> - A WATER BEARING FORMATION OR STRATA. <u>ARENACEOUS</u> - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. <u>ARGILLACEOUS</u> - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. <u>ARTESIAN</u> - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. <u>CALCAREOUS (CALC.)</u> - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. <u>COLLUVIUM</u> - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. <u>CORE RECOVERY (REC.)</u> - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>DIKE</u> - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. <u>DIP</u> - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. <u>DIP DIRECTION (DIP AZIMUTH)</u> - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. <u>FAULT</u> - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. <u>FISSILE</u> - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. <u>FLOAT</u> - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. <u>FLOOD PLAIN (FP)</u> - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. <u>FORMATION (FM.)</u> - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. <u>JOINT</u> - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. <u>LEDGE</u> - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. <u>LENS</u> - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. <u>MOTTLED (MOT.)</u> - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. <u>PERCHED WATER</u> - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. <u>RESIDUAL (RES.) SOIL</u> - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. <u>ROCK QUALITY DESIGNATION (RQD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>SAPROLITE (SAP.)</u> - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. <u>SILL</u> - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. <u>SLICKENSIDE</u> - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. <u>STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT)</u> - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. <u>STRATA CORE RECOVERY (SRC.)</u> - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. <u>STRATA ROCK QUALITY DESIGNATION (SRQD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. <u>TOPSOIL (TS.)</u> - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.		
	NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.				
	FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.				
	FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.				
	COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.				
WEATHERING					
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.				
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.				
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.				
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.				
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>				
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, YIELDS SPT N VALUES > 100 BPF</u>				
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, YIELDS SPT N VALUES < 100 BPF</u>				
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.				
ROCK HARDNESS					
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.				
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.				
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.				
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.				
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.				
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.				
FRACTURE SPACING			BEDDING		
TERM	SPACING	TERM	THICKNESS		
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	> 4 FEET		
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET		
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET		
CLOSE	0.16 TO 1 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET		
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET		
		THINLY LAMINATED	< 0.008 FEET		
INDURATION					
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.					
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.				
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.				
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.				
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.				
			BENCH MARK: SE CORNER OF BRIDGE DECK (NEAREST EB1-B)		
			ELEVATION: 100 FT.		
NOTES:					

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	WBS NO. 17BP.13.R.108	3	8



BORING LOCATION MAP

***BRIDGE NO. 38 ON NC 108
(TRYON ROAD) OVER
MOUNTAIN CREEK***

WBS NO. 17BP.13.R.108

RUTHERFORD COUNTY, NORTH CAROLINA

DRAWN BY: T. RIDEOUT



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET 4 OF 7

WBS 17BP.13.R.108			TIP 17BP.13.R.108			COUNTY RUTHERFORD			GEOLOGIST DeLost, R.					
SITE DESCRIPTION Bridge No. 38 on NC 108 (Tryon Road) Over Mointain Creek									GROUND WTR (ft)					
BORING NO. EB1-A			STATION N/A			OFFSET N/A			ALIGNMENT -L-			0 HR. N/A		
COLLAR ELEV. 102.9 ft			TOTAL DEPTH 60.4 ft			NORTHING 593,253			EASTING 1,102,412			24 HR. N/A		
DRILL RIG/HAMMER EFF./DATE F&H0404 CME-45C 87.6% 08/15/2011						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic					
DRILLER Morgan, M.			START DATE 07/16/12			COMP. DATE 07/16/12			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)
105														
													102.9	0.0
													GROUND SURFACE	
100													ROADWAY EMBANKMENT	
	97.9	5.0	1	2	1								Red, pink, black, white, tan & brown, v. loose, cse. grain, micaceous silty sand (A-2-4).	
95														
	92.9	10.0	1	2	1									
90														
	87.9	15.0	1	1	2									
85														
	82.9	20.0	WOH	2	2									
80														
	77.9	25.0	2	4	3									
75														
	72.9	30.0	1	3	5									
70														
	67.9	35.0	1	3	4									
65														
	62.9	40.0	4	5	7									
60														
	57.9	45.0	11	23	30									
55														
	52.9	50.0	10	14	22									
50														
	47.9	55.0	11	24	39									
45														
	42.9	60.0	100/0.4											

NCDOT BORE SINGLE 081&000_GEO_BRD0038 BORE.GPJ NC_DOT.GDT 7/19/12



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET 5 OF 7

WBS 17BP.13.R.108		TIP 17BP.13.R.108		COUNTY RUTHERFORD		GEOLOGIST DeLost, R.	
SITE DESCRIPTION Bridge No. 38 on NC 108 (Tryon Road) Over Mointain Creek							GROUND WTR (ft)
BORING NO. EB1-B		STATION N/A		OFFSET N/A		ALIGNMENT -L-	
COLLAR ELEV. 100.6 ft		TOTAL DEPTH 55.6 ft		NORTHING 593,236		EASTING 1,102,427	
DRILL RIG/HAMMER EFF./DATE F&H0404 CME-45C 87.6% 08/15/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic	
DRILLER Morgan, M.		START DATE 07/16/12		COMP. DATE 07/16/12		SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					ELEV. (ft)
105															
100															
95	95.6	5.0	2	1	2										GROUND SURFACE 0.0
90	90.6	10.0	1	1	1										ROADWAY EMBANKMENT Tan, red, white, black & brown, v. loose, cse. grain, micaceous, quartz sand w/asphalt (A-2-6).
85	85.6	15.0	2	1	2										
80	80.6	20.0	WOH	1	2										
75	75.6	25.0	7	7	6										
70	70.6	30.0	3	3	7										
65	65.6	35.0	10	20	31										
60	60.6	40.0	28	64	36/0.3										
55	55.6	45.0	10	29	41										
50	50.6	50.0	12	23	28										
45	45.6	55.0	42	58/0.1											

100/0.8

100/0.6

82.3

72.3

59.6

57.4

45.1

45.0

55.5

55.6

ALLUVIAL
Gray, white & black, v. loose to med. dense, cse. grain, sub-rounded, quartz sand (A-4).

RESIDUAL
Tan & green, med. dense to v. dense, cse. grain, sub-rounded, saprolitic sand (A-2-5).

WEATHERED ROCK
Weathered rock (Schist)

RESIDUAL
White, tan & black, cse. grain, v. dense, micaceous, saprolitic, quartz sand (A-4).

WEATHERED ROCK
Weathered rock (Schist)
Boring Terminated by Auger Refusal at Elevation 45.0 ft on Crystalline Rock (Schist).

NCDOT BORE SINGLE 081&000_GEO_BRD0038 BORE.GPJ NC_DOT.GDT 7/19/12



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 6 OF 7

WBS 17BP.13.R.108		TIP 17BP.13.R.108		COUNTY RUTHERFORD		GEOLOGIST DeLost, R.											
SITE DESCRIPTION Bridge No. 38 on NC 108 (Tryon Road) Over Moutain Creek							GROUND WTR (ft)										
BORING NO. EB2-A		STATION N/A		OFFSET N/A		ALIGNMENT -L-		0 HR. N/A									
COLLAR ELEV. 99.9 ft		TOTAL DEPTH 50.3 ft		NORTHING 593,332		EASTING 1,102,482		24 HR. N/A									
DRILL RIG/HAMMER EFF./DATE F&H0404 CME-45C 87.6% 08/15/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic											
DRILLER Morgan, M.		START DATE 07/17/12		COMP. DATE 07/17/12		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
100															99.9	GROUND SURFACE	0.0
95	94.7	5.2	1	2	1	3							M			ROADWAY EMBANKMENT Red, pink, tan & black, v. loose, cse. grain, micaceous, quartz sand w/asphalt (A-2-4).	
90	89.7	10.2	WOH	1	2	3							M				
85	84.7	15.2	WOH	2	1	3							M				
80	79.7	20.2	WOH	WOH	WOH								Sat.		81.4	ALLUVIAL Brown, v. soft, micaceous, plastic, silty clay (A-6).	18.5
75	74.7	25.2	WOH	2	1	3							Sat.		76.4	Gray, white & clear, v. loose, cse. grain, quartz sand w/clay layer (A-3).	23.5
70	69.7	30.2	2	2	3	5							W		71.4	RESIDUAL Tan, red, black & white, loose to med. dense, cse. grain, micaceous, saprolitic, biotite quartz sand w/wood frags. (A-2-5).	28.5
65	64.7	35.2	2	3	5	8							D				
60	59.7	40.2	2	6	7	13							D				
55	54.7	45.2	4	6	8	14							D				
50	49.7	50.2	60/0.1			60/0.1									49.6	Boring Terminated with Standard Penetration Test Refusal at Elevation 49.6 ft on Crystalline Rock (Schist).	50.3

NCDOT BORE SINGLE 081&000_GEO_BRDG0038_BORE.GPJ NC_DOT_GDT 7/19/12



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 7 OF 7

WBS 17BP.13.R.108		TIP 17BP.13.R.108		COUNTY RUTHERFORD		GEOLOGIST DeLost, R.												
SITE DESCRIPTION Bridge No. 38 on NC 108 (Tryon Road) Over Mointain Creek							GROUND WTR (ft)											
BORING NO. EB2-B		STATION N/A		OFFSET N/A		ALIGNMENT -L-		0 HR. N/A										
COLLAR ELEV. 99.7 ft		TOTAL DEPTH 55.9 ft		NORTHING 593,313		EASTING 1,102,494		24 HR. N/A										
DRILL RIG/HAMMER EFF./DATE F&H0404 CME-45C 87.6% 08/15/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic												
DRILLER Morgan, M.		START DATE 07/17/12		COMP. DATE 07/17/12		SURFACE WATER DEPTH N/A												
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100								
100															99.7	GROUND SURFACE	0.0	
95	94.8	4.9	2	1	2	3							D			ROADWAY EMBANKMENT Red & tan, v. loose to loose, cse. grain, micaceous, silty sand w/asphalt (A-2-4).		
90	89.8	9.9	1	1	2	3							D					
85	84.8	14.9	2	3	2	5							D					
80	79.8	19.9	WOH	WOH	2	2							Sat.		81.5	ALLUVIAL	18.2	
75	74.8	24.9	2	2	3	5							Sat.			White, gray & clear, v. loose to loose, cse. grain, micaceous, sub-rounded, clayey quartz sand (A-3).		
70	69.8	29.9	WOH	5	7	12							Sat.		71.5		RESIDUAL	28.2
65	64.8	34.9	9	21	16	37							W				Tan, red, clear, pink & black, med. dense to v. dense, f. to cse. grain, micaceous, saprolitic quartz sand (A-2-4).	
60	59.8	39.9	31	30	27	57							M					
55	54.8	44.9	12	16	22	38							M					
50	49.8	49.9	40	47	29	76							D					
45	44.8	54.9	22	78/0.5											44.3	WEATHERED ROCK	55.4	
															43.8	Weathered rock (Schist). Boring Terminated by Auger Refusal at Elevation 43.8 ft on Crystalline Rock (Schist).	55.9	

NCDOT BORE SINGLE 081&000_GEO_BRDG0038 BORE.GPJ NC_DOT.GDT 7/19/12