

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 17BP.11.R.74 F.A. PROJ. N/A

COUNTY ALLEGHANY

PROJECT DESCRIPTION BRIDGE NO. 57 ON SR 1193
OVER WATERFALLS CREEK

SITE DESCRIPTION _____

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2-2A	NCDOT DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS AND ABBREVIATIONS
3	SITE PLAN
4-9	BORING LOGS, CORE LOGS, AND CORE PHOTOS

PERSONNEL

C. V. NORVILLE

J. R. HAMM

W. S. HUNSBERGER

TRIGON

INVESTIGATED BY W. S. HUNSBERGER

CHECKED BY J. R. HAMM

SUBMITTED BY FALCON

DATE NOVEMBER 2013

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF PREPARING THE SCOPE OF WORK TO BE INCLUDED IN THE REQUEST FOR PROPOSAL. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.


SOIL AND ROCK BOUNDARIES WITHIN A BOREHOLE ARE BASED ON GEOTECHNICAL INTERPRETATION UNLESS ENCOUNTERED IN A SAMPLE. INTERPRETED BOUNDARIES MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLED STRATA, AND BOREHOLE INFORMATION MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

DRAWN BY: W. S. HUNSBERGER

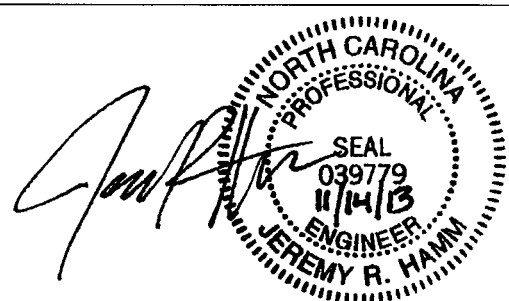

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION										GRADATION									
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: VERY STIFF, GRAY, SILTY CLAY, MOST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6										WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.									
SOIL LEGEND AND AASHTO CLASSIFICATION										ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS <u>ANGULAR</u> , <u>SUBANGULAR</u> , <u>SUBROUNDED</u> , OR <u>ROUNDED</u> .									
MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.										COMPRESSIONIBILITY SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE									
PERCENTAGE OF MATERIAL										GROUND WATER									
GRANULAR MATERIALS (≤ 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS										GRANULAR SOILS SILT-CLAY SOILS MUCK, PEAT									
GROUP CLASS. A-1, A-3, A-2, A-4, A-5, A-6, A-7, A-1-a, A-1-b, A-2-4, A-2-5, A-2-6, A-2-7, A-7-6, A-7-8, A-7-9										LIQUID LIMIT LESS THAN 31 LIQUID LIMIT EQUAL TO 31-50 LIQUID LIMIT GREATER THAN 50									
SYMBOL										WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP									
% PASSING # 10 # 40 # 200										MISCELLANEOUS SYMBOLS									
LIQUID LIMIT PLASTIC INDEX GROUP INDEX USUAL TYPES OF MAJOR MATERIALS GEN. RATING AS A SUBGRADE										ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES									
PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30										TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD									
CONSISTENCY OR DENSENESS										ABBREVIATIONS									
PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)										AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST F - FINE FOSS - FOSSILIFEROUS FRAC - FRACTURED, FRACTURES FRAGS - FRAGMENTS HL - HIGHLY									
TEXTURE OR GRAIN SIZE										MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP - SAPROLITIC SD - SAND, SANDY SL - SILT, SILTY SLI - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY									
U.S. STD. SIEVE SIZE OPENING (MM) 4 10 40 60 200 270 4.76 2.00 0.42 0.25 0.075 0.053										VST - VANE SHEAR TEST WEA. - WEATHERED w - UNIT WEIGHT w _d - DRY UNIT WEIGHT									
BOULDER (BLOR.) COBBLE (COB.) GRAVEL (GR.) COARSE SAND (CSE, SD.) FINE SAND (F SD.) SILT (SL.) CLAY (CL.) GRAIN SIZE MM 305 75 2.0 0.25 0.05 0.005 IN. 12 3										SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO									
SOIL MOISTURE - CORRELATION OF TERMS										EQUIPMENT USED ON SUBJECT PROJECT									
SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION										DRILL UNITS: ADVANCING TOOLS: HAMMER TYPE:									
LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT										[X] MOBILE B-57 BK-51 CME-45C CME-550 PORTABLE HOIST									
PLASTICITY PLASTICITY INDEX (PI) DRY STRENGTH										[X] CLAY BITS 6" CONTINUOUS FLIGHT AUGER [X] 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG-CARBIDE INSERTS CASING [] W/ ADVANCER TRICONE [] STEEL TEETH TRICONE [] TUNG-CARB. [X] CORE BIT									
NONPLASTIC LOW PLASTICITY MED. PLASTICITY HIGH PLASTICITY										[X] AUTOMATIC [] MANUAL CORE SIZE: [] B [X] N 02 [] H									
COLOR DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										HAND TOOLS: [] POST HOLE DIGGER [] HAND AUGER [] SOUNDING ROD [] VANE SHEAR TEST									

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS


ROCK DESCRIPTION		TERMS AND DEFINITIONS	
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:		ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.	
WEATHERED ROCK (WR)		NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.	
CRYSTALLINE ROCK (CR)		FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.	
NON-CRYSTALLINE ROCK (NCR)		FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.	
COASTAL PLAIN SEDIMENTARY ROCK (CP)		COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.	
WEATHERING			
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.		
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.		
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.		
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.		
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>		
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, YIELDS SPT N VALUES > 100 BPF</u>		
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, YIELDS SPT N VALUES < 100 BPF</u>		
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.		
ROCK HARDNESS			
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.		
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.		
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.		
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.		
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.		
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.		
FRACTURE SPACING		BEDDING	
TERM	SPACING	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	> 4 FEET
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
		THINLY LAMINATED	< 0.008 FEET
INDURATION			
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.			
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.		
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.		
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.		
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.		

BENCH MARK: BM 02-0057-02 (GPS 2) LOCATED 83 FT SOUTH OF BRIDGE
 N: 992793 E: I366211

ELEVATION: 2954.96 FT.

NOTES:

F.I.A.D. - FILLED IMMEDIATELY AFTER DRILLING

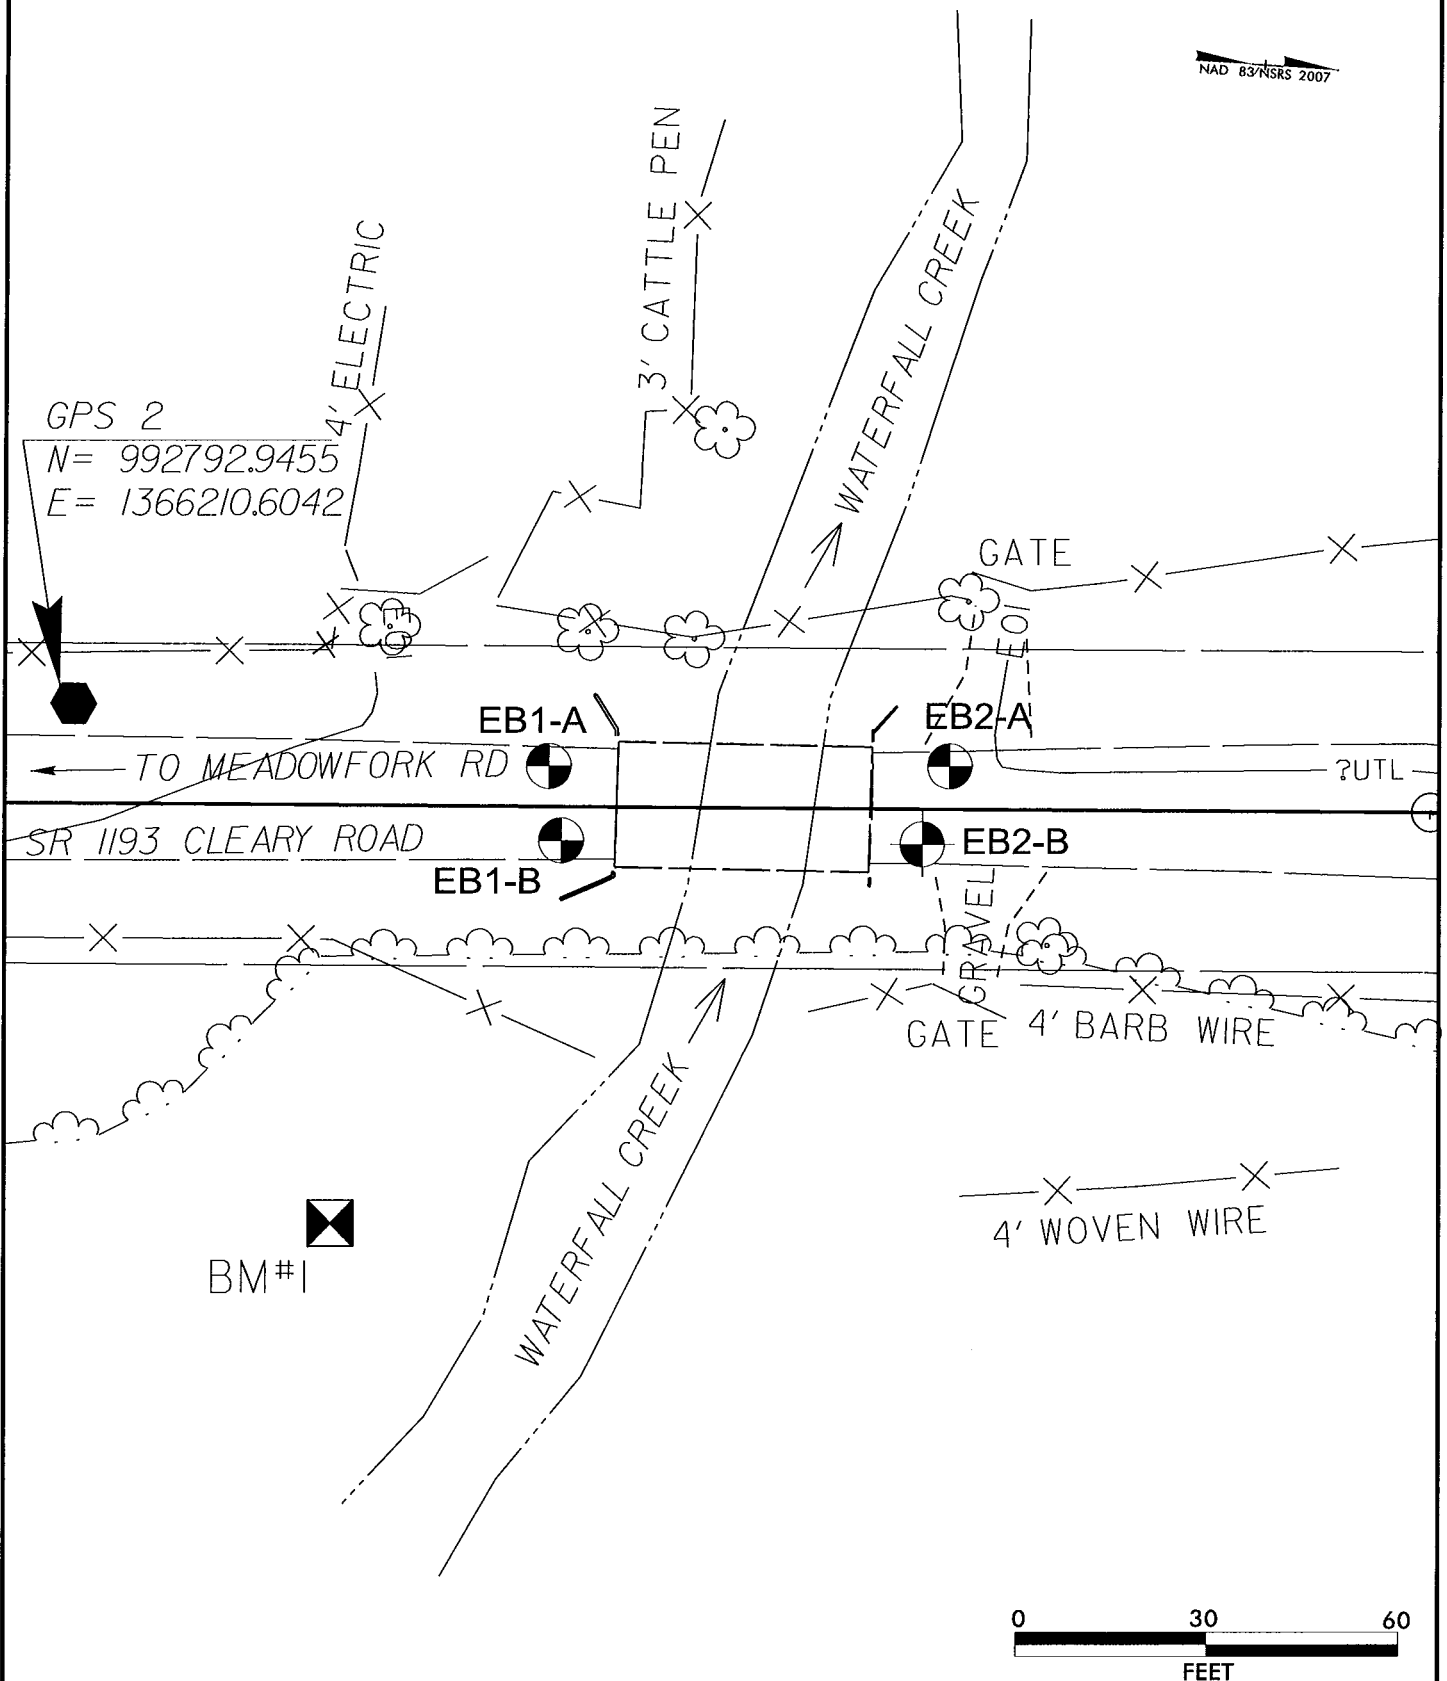

NOTES:

- PLANS ADOPTED FROM ELECTRONIC FILES RECEIVED FROM NCDOT GEOTECHNICAL ENGINEERING UNIT IN OCTOBER 2013



FALCON ENGINEERING, INC.
 1210 TRINITY ROAD, SUITE 110
 RALEIGH, NC 27607
 PHONE: 919.871.0800
 FAX: 919.871.0803

SITE PLAN

BRIDGE NO. 57 ON SR 1193
 OVER WATERFALLS CREEK
 ALLEGHANY COUNTY, NC
 WBS NO.: 17BP.11.R.74



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET 4

WBS 17BP.11.R.74		TIP N/A		COUNTY ALLEGHANY		GEOLOGIST Hunsberger, W. S.	
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK							GROUND WTR (ft)
BORING NO. EB1-A		STATION N/A		OFFSET N/A		ALIGNMENT N/A	
COLLAR ELEV. 2,956.2 ft		TOTAL DEPTH 10.7 ft		NORTHING 992,868		EASTING 1,366,215	
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic	
DRILLER Gower, S.		START DATE 09/30/13		COMP. DATE 09/30/13		SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
2960																
2955	2,955.2	1.0	6	2	2										2,956.2	0.0
															2,954.9	1.3
	2,952.7	3.5	1	3	1										2,951.9	4.3
2950	2,950.2	6.0	WOH	WOH	1											
	2,947.7	8.5	8	6	21										2,946.8	9.4
	2,945.5	10.7	60/0.0												2,945.5	10.7

EXISTING PAVEMENT 0.0

2" BITUMINOUS CONCRETE 1.3

14" AGGREGATE BASE COURSE

ROADWAY EMBANKMENT

BROWN, F. SANDY SILT (A-4) W/ GRAVEL, MICACEOUS 4.3

ALLUVIAL

DK. BROWN AND BLACK, F. SANDY SILT (A-4) W/ TRACE ORGANICS, GRAVEL, MICACEOUS 9.4

RESIDUAL

TAN BROWN AND ORANGE, SI. SAND (A-2-4) W/ ROCK FRAGS 10.7

Boring Terminated by Auger Refusal at Elevation 2,945.5 ft on CR: BIOTITE GNEISS



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 5

WBS 17BP.11.R.74		TIP N/A		COUNTY ALLEGHANY		GEOLOGIST Hunsberger, W. S.						
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK						GROUND WTR (ft)						
BORING NO. EB1-B		STATION N/A		OFFSET N/A		ALIGNMENT N/A						
COLLAR ELEV. 2,956.3 ft		TOTAL DEPTH 11.2 ft		NORTHING 992,871		EASTING 1,366,227						
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic						
DRILLER Gower, S.		START DATE 09/30/13		COMP. DATE 09/30/13		SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT		SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100		
2960												
2955	2,955.3	1.0	7	4	3							2,956.3 EXISTING PAVEMENT 0.0
	2,952.8	3.5	4	4	5							2,954.7 3" BITUMINOUS CONCRETE 1.6
2950	2,950.3	6.0	2	1	1							16" AGGREGATE BASE COURSE
	2,947.8	8.5	15	8	92/0.4							ROADWAY EMBANKMENT
	2,945.1	11.2										RED AND ORANGE, SILTY SAND (A-2-4) W/ GRAVEL
												7.1
												ALLUVIAL
												9.0
												11.2
												WEATHERED ROCK
												DK. BROWN AND BLACK, SILTY F. TO MED. SAND (A-2-4) W/ GRAVEL, TRACE ORGANICS
												DK. AND LT. GRAY TAN AND BROWN, BIOTITE GNEISS
												Boring Terminated by Auger Refusal at Elevation 2,945.1 ft on CR: BIOTITE GNEISS



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET 6

WBS 17BP.11.R.74		TIP N/A		COUNTY ALLEGHANY		GEOLOGIST Hunsberger, W. S.	
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK							GROUND WTR (ft)
BORING NO. EB2-A		STATION N/A		OFFSET N/A		ALIGNMENT N/A	
COLLAR ELEV. 2,956.7 ft		TOTAL DEPTH 39.5 ft		NORTHING 992,931		EASTING 1,366,211	
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic	
DRILLER Gower, S.		START DATE 09/30/13		COMP. DATE 09/30/13		SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	L O G	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
2960																
2955	2,955.7	1.0	1	2	2										2,956.7	0.0
	2,953.2	3.5	3	2	1										2,955.7	1.0
2950	2,950.7	6.0	WOH	WOH	1										2,953.7	3.0
	2,948.2	8.5	3	9	37										2,951.2	5.5
2945	2,943.2	13.5	3	3	6										2,947.6	9.1
2940	2,938.2	18.5	14	15	16											
2935	2,933.2	23.5	13	14	12											
2930	2,928.2	28.5	9	15	24											
2925	2,923.2	33.5	19	22	24											
2920	2,918.2	38.5														
	2,917.2	39.5														

100/0.3
60/0.0

2,929.7

2,924.7

2,918.2

2,917.2

38.5

39.5

WEATHERED ROCK

TAN ORANGE AND BROWN, BIOTITE GNEISS

Boring Terminated by Auger Refusal at Elevation 2,917.2 ft on CR: BIOTITE GNEISS

EXISTING PAVEMENT

2" BITUMINOUS CONCRETE

10" AGGREGATE BASE COURSE

ROADWAY EMBANKMENT

RED-ORANGE, F. SANDY SILT (A-4) MICACEOUS

BROWN, SI. SAND (A-2-4) W/ GRAVEL

ALLUVIAL

BROWN, CLAYEY F. SAND (A-2-6)

RESIDUAL

TAN ORANGE AND BROWN, SI. SAND (A-2-4) W/ ROCK FRAGS, MICACEOUS, SAPROLITIC

TAN ORANGE AND BROWN, F. SANDY SILT (A-4) MICACEOUS, SAPROLITIC

TAN ORANGE AND BROWN, SI. F. SAND (A-2-4) MICACEOUS, SAPROLITIC

NCDOT BORE SINGLE 003&000_GEO_BRDG0057_GINT LOG.GPJ NC_DOT.GDT 11/12/13



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 7

WBS 17BP.11.R.74	TIP N/A	COUNTY ALLEGHANY	GEOLOGIST Hunsberger, W. S.
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK			
BORING NO. EB2-B	STATION N/A	OFFSET N/A	ALIGNMENT N/A
COLLAR ELEV. 2,956.6 ft	TOTAL DEPTH 11.8 ft	NORTHING 992,927	EASTING 1,366,223
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011		DRILL METHOD H.S. Augers	HAMMER TYPE Automatic
DRILLER Gower, S.	START DATE 09/30/13	COMP. DATE 09/30/13	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	L O G	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)
2960														
2955	2,955.6	1.0	3	3	3								2,956.6 EXISTING PAVEMENT	0.0
	2,953.1	3.5	4	12	9								2,955.7 3.5" BITUMINOUS CONCRETE	1.0
	2,950.6	6.0											2,952.4 8" AGGREGATE BASE COURSE	
2950	2,950.4	6.3	100/0.3										2,952.4 ROADWAY EMBANKMENT	4.2
			60/0.0										2,950.6 ORANGE AND TAN, SANDY SILT (A-4) W/ GRAVEL, MICACEOUS	6.0
													2,950.3 RESIDUAL	6.3
													2,950.3 TAN WHITE AND BROWN, SI. SAND (A-2-4) W/ ROCK FRAGS, QUARTZ, MICACEOUS	
2945													2,944.8 WEATHERED ROCK	11.8
													ORANGE TAN AND WHITE, BIOTITE GNEISS	
													CRYSTALLINE ROCK	
													GRAY AND WHITE, BIOTITE GNEISS	
													Boring Terminated at Elevation 2,944.8 ft in CR: BIOTITE GNEISS	



NCDOT GEOTECHNICAL ENGINEERING UNIT

CORE BORING REPORT

SHEET 8

WBS 17BP.11.R.74				TIP N/A		COUNTY ALLEGHANY				GEOLOGIST Hunsberger, W. S.			
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK										GROUND WTR (ft)			
BORING NO. EB2-B				STATION N/A		OFFSET N/A		ALIGNMENT N/A		0 HR. Dry			
COLLAR ELEV. 2,956.6 ft				TOTAL DEPTH 11.8 ft		NORTHING 992,927		EASTING 1,366,223		24 HR. FIAD			
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011						DRILL METHOD H.S. Augers				HAMMER TYPE Automatic			
DRILLER Gower, S.				START DATE 09/30/13		COMP. DATE 09/30/13		SURFACE WATER DEPTH N/A					
CORE SIZE NQ2				TOTAL RUN 5.5 ft									
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN REC. (ft) %	RQD (ft) %	SAMP. NO.	STRATA REC. (ft) %	RQD (ft) %	LOG	DESCRIPTION AND REMARKS	DEPTH (ft)	
2950.34	2950.3	6.3	4.5	4:05/1.0 4:52/1.0 4:32/1.0 4:39/1.0 3:08/0.5 4:21/1.0	(4.5) 100%	(4.5) 100%					Begin Coring @ 6.3 ft	6.3	
	2,950.3										CRYSTALLINE ROCK		
	2,945.8	10.8									GRAY AND WHITE, FRESH, HARD, WIDELY FRACTURED, BIOTITE GNEISS		
2945	2,944.8	11.8	1.0		(1.0) 100%	(1.0) 100%					R1=4, R2 = 20, R3 = 15, R4 = 20, R5 = 4 RMR = 63	11.8	
											Boring Terminated at Elevation 2,944.8 ft in CR: BIOTITE GNEISS		

NCDOT CORE SINGLE 003&000_GEO_BRDG0057_GINT LOG.GPJ NC_DOT.GDT 11/12/13




NCDOT GEOTECHNICAL ENGINEERING UNIT

CORE BORING REPORT

SHEET 9

WBS 17BP.11.R.74				TIP N/A		COUNTY ALLEGHANY				GEOLOGIST Hunsberger, W. S.			
SITE DESCRIPTION BRIDGE NO. 57 ON SR 1193 OVER WATERFALLS CREEK										GROUND WTR (ft)			
BORING NO. EB2-B				STATION N/A		OFFSET N/A		ALIGNMENT -L-		0 HR. Dry			
COLLAR ELEV. 2,956.6 ft				TOTAL DEPTH 11.8 ft		NORTHING 992,927		EASTING 1,366,223		24 HR. FIAD			
DRILL RIG/HAMMER EFF./DATE TRI8016 MOBILE B-57 93% 12/08/2011						DRILL METHOD H.S. Augers			HAMMER TYPE Automatic				
DRILLER Gower, S.				START DATE 09/30/13		COMP. DATE 09/30/13		SURFACE WATER DEPTH N/A					
CORE SIZE NQ2				TOTAL RUN 5.5 ft									
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN REC. (ft) %	RUN RQD (ft) %	SAMP. NO.	STRATA REC. (ft) %	STRATA RQD (ft) %	LOG	DESCRIPTION AND REMARKS	DEPTH (ft)	
2950.34													
2950.3	2,950.3	6.3	4.5	N=60/0.0 4:05/1.0 4:52/1.0 4:32/1.0 4:39/1.0 3:08/0.5 4:21/1.0	(4.5) 100%	(4.5) 100%					Begin Coring @ 6.3 ft	6.3	
											CRYSTALLINE ROCK		
											GRAY AND WHITE, FRESH, HARD, WIDELY FRACTURED, BIOTITE GNEISS		
2945	2,945.8	10.8									R1=4, R2 = 20, R3 = 15, R4 = 20, R5 = 4		
	2,944.8	11.8	1.0		(1.0) 100%	(1.0) 100%					RMR = 63	11.8	
											Boring Terminated at Elevation 2,944.8 ft in CR: BIOTITE GNEISS		

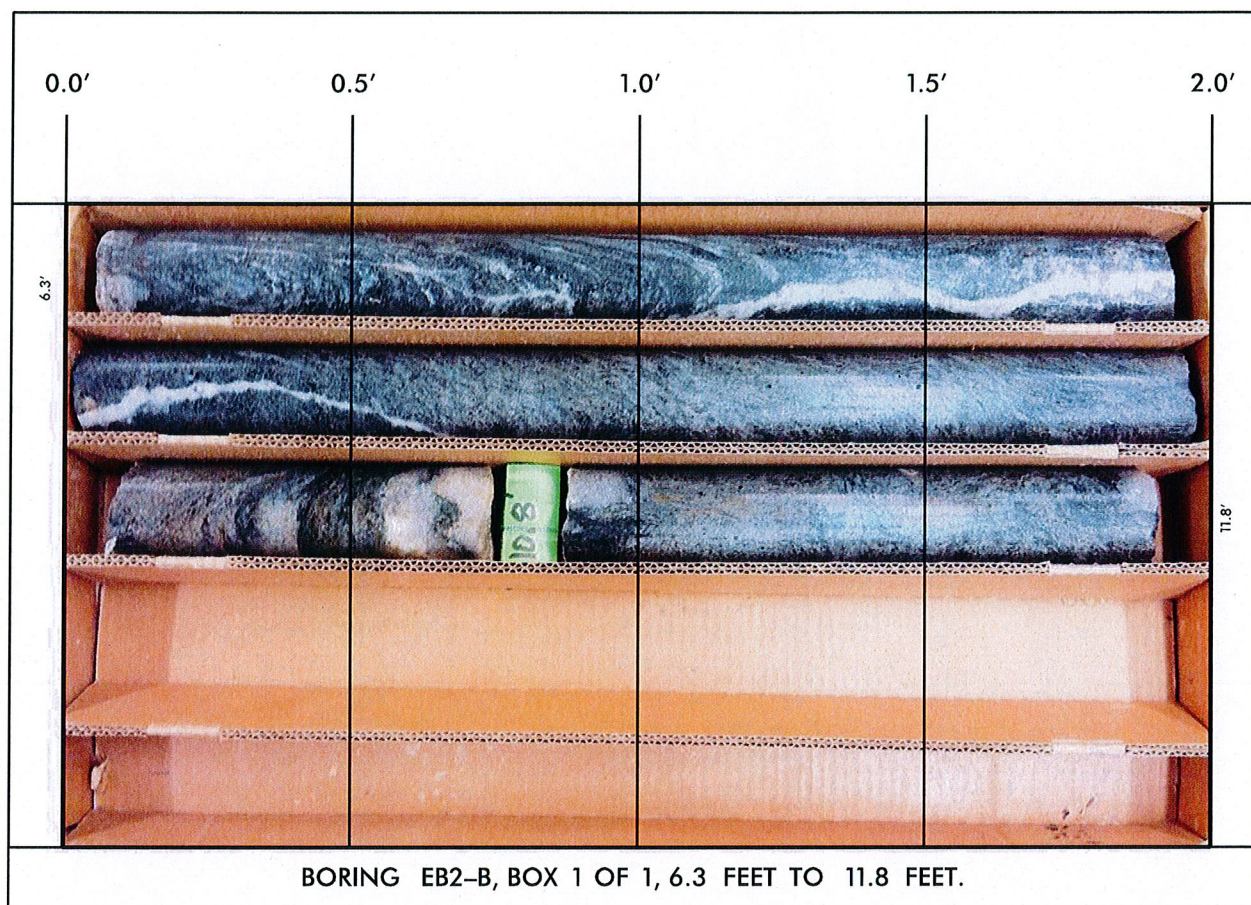

FALCON ENGINEERING, INC.
1210 TRINITY ROAD, SUITE 110
RALEIGH, NC 27607
PHONE: 919.871.0800
FAX: 919.871.0803

ROCK CORE PHOTOS

BRIDGE NO. 57 ON SR 1193
OVER WATERFALLS CREEK
ALLEGHANY COUNTY, NC
WBS NO.: 17BP.11.R.74