



PROJECT REFERENCE NO. 17BP.14.R.99						SHEET NO. 2/6																																																																									
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS																																																																															
SOIL DESCRIPTION				GRADATION																																																																											
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6				WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.																																																																											
SOIL LEGEND AND AASHTO CLASSIFICATION				ANGULARITY OF GRAINS																																																																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th colspan="2">GENERAL CLASS.</th> <th colspan="2">GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th colspan="2">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="2">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>SYMBOL</th> <th>A-1, A-1-b</th> <th>A-2, A-2-5, A-2-6, A-2-7</th> <th>A-4, A-5, A-6, A-7-5, A-7-6</th> <th>A-1, A-2, A-3</th> <th>A-4, A-5, A-6, A-7</th> <th></th> </tr> <tr> <td>SYMBOL</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>% PASSING</td> <td></td> <td>50 MX 10 40 200</td> <td>50 MX 10 MX 25 MX 10 MX</td> <td>35 MX 35 MX 35 MX 35 MX 36 MN 36 MN 36 MN 36 MN</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td></td> </tr> <tr> <td>LIQUID LIMIT</td> <td></td> <td>6 MX</td> <td>NP</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td></td> </tr> <tr> <td>PLASTIC INDEX</td> <td></td> <td>6 MX</td> <td>NP</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td>40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX</td> <td></td> </tr> <tr> <td>GROUP INDEX</td> <td></td> <td>0</td> <td>0</td> <td>4 MX</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> </tr> <tr> <td>USUAL TYPES OF MAJOR MATERIALS</td> <td></td> <td>STONE FRAGS. GRAVEL, AND SAND</td> <td>FINE SAND</td> <td>SILTY OR CLAYEY GRAVEL AND SAND</td> <td>SILTY SOILS</td> <td>CLAYEY SOILS</td> <td></td> </tr> <tr> <td>GEN. RATING AS A SUBGRADE</td> <td></td> <td colspan="2">EXCELLENT TO GOOD</td> <td colspan="2">FAIR TO POOR</td> <td>FAIR TO POOR</td> <td>POOR</td> </tr> </table>				GENERAL CLASS.		GRANULAR MATERIALS (≤ 35% PASSING #200)		SILT-CLAY MATERIALS (> 35% PASSING #200)		ORGANIC MATERIALS		GROUP CLASS.	SYMBOL	A-1, A-1-b	A-2, A-2-5, A-2-6, A-2-7	A-4, A-5, A-6, A-7-5, A-7-6	A-1, A-2, A-3	A-4, A-5, A-6, A-7		SYMBOL								% PASSING		50 MX 10 40 200	50 MX 10 MX 25 MX 10 MX	35 MX 35 MX 35 MX 35 MX 36 MN 36 MN 36 MN 36 MN	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX		LIQUID LIMIT		6 MX	NP	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX		PLASTIC INDEX		6 MX	NP	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX		GROUP INDEX		0	0	4 MX	8 MX	12 MX	16 MX	USUAL TYPES OF MAJOR MATERIALS		STONE FRAGS. GRAVEL, AND SAND	FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS		GEN. RATING AS A SUBGRADE		EXCELLENT TO GOOD		FAIR TO POOR		FAIR TO POOR	POOR	MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.			
GENERAL CLASS.		GRANULAR MATERIALS (≤ 35% PASSING #200)		SILT-CLAY MATERIALS (> 35% PASSING #200)		ORGANIC MATERIALS																																																																									
GROUP CLASS.	SYMBOL	A-1, A-1-b	A-2, A-2-5, A-2-6, A-2-7	A-4, A-5, A-6, A-7-5, A-7-6	A-1, A-2, A-3	A-4, A-5, A-6, A-7																																																																									
SYMBOL																																																																															
% PASSING		50 MX 10 40 200	50 MX 10 MX 25 MX 10 MX	35 MX 35 MX 35 MX 35 MX 36 MN 36 MN 36 MN 36 MN	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX																																																																									
LIQUID LIMIT		6 MX	NP	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX																																																																									
PLASTIC INDEX		6 MX	NP	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX	40 MX 10 MX 11 MN 10 MX 11 MN 10 MX 11 MN 10 MX																																																																									
GROUP INDEX		0	0	4 MX	8 MX	12 MX	16 MX																																																																								
USUAL TYPES OF MAJOR MATERIALS		STONE FRAGS. GRAVEL, AND SAND	FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS																																																																									
GEN. RATING AS A SUBGRADE		EXCELLENT TO GOOD		FAIR TO POOR		FAIR TO POOR	POOR																																																																								
COMPRESSION				PERCENTAGE OF MATERIAL																																																																											
SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE				LIQUID LIMIT LESS THAN 31 LIQUID LIMIT EQUAL TO 31-50 LIQUID LIMIT GREATER THAN 50																																																																											
GROUND WATER				MISCELLANEOUS SYMBOLS																																																																											
 WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP				<table border="0" style="width:100%;"> <tr> <td style="vertical-align: top;"> ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES </td> <td style="vertical-align: top;"> TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD </td> <td style="vertical-align: top;"> TEST BORING W/ CORE SPT N-VALUE SPT REFUSAL </td> </tr> </table>				 ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES	 TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD	 TEST BORING W/ CORE SPT N-VALUE SPT REFUSAL																																																																					
 ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY DIP & DIP DIRECTION OF ROCK STRUCTURES	 TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD	 TEST BORING W/ CORE SPT N-VALUE SPT REFUSAL																																																																													
CONSISTENCY OR DENSENESS				ABBREVIATIONS																																																																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td><4 4 TO 10 10 TO 30 30 TO 50 >50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td><2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30</td> <td><0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4</td> </tr> </table>				PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4	<table border="0" style="width:100%;"> <tr> <td style="vertical-align: top;"> AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS - FOSSILIFEROUS FRAC - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HL - HIGHLY </td> <td style="vertical-align: top;"> MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY </td> <td style="vertical-align: top;"> VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ_d - DRY UNIT WEIGHT SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACT TRIAXIAL CBR - CALIFORNIA BEARING RATIO </td> </tr> </table>				AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS - FOSSILIFEROUS FRAC - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HL - HIGHLY	MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY	VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ _d - DRY UNIT WEIGHT SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACT TRIAXIAL CBR - CALIFORNIA BEARING RATIO																																																									
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																												
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	<4 4 TO 10 10 TO 30 30 TO 50 >50	N/A																																																																												
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	<2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 >30	<0.25 0.25 TO 0.50 0.5 TO 1.0 1 TO 2 2 TO 4 >4																																																																												
AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS - FOSSILIFEROUS FRAC - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HL - HIGHLY	MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY	VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ _d - DRY UNIT WEIGHT SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACT TRIAXIAL CBR - CALIFORNIA BEARING RATIO																																																																													
TEXTURE OR GRAIN SIZE				EQUIPMENT USED ON SUBJECT PROJECT																																																																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>U.S. STD. SIEVE SIZE</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <th>OPENING (MM)</th> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </table>				U.S. STD. SIEVE SIZE	4	10	40	60	200	270	OPENING (MM)	4.76	2.00	0.42	0.25	0.075	0.053	<table border="0" style="width:100%;"> <tr> <td style="vertical-align: top;"> DRILL UNITS: ☐ MOBILE B-____ ☐ BK-51 ☐ CME-45C ☒ CME-550 ☐ PORTABLE HOIST </td> <td style="vertical-align: top;"> ADVANCING TOOLS: ☐ CLAY BITS ☐ 6" CONTINUOUS FLIGHT AUGER ☐ 8" HOLLOW AUGERS ☐ HARD FACED FINGER BITS ☐ TUNG.-CARBIDE INSERTS ☒ CASING ☒ W/ ADVANCER ☐ TRICONE _____ * STEEL TEETH ☐ TRICONE _____ * TUNG.-CARB. ☒ CORE BIT </td> <td style="vertical-align: top;"> HAMMER TYPE: ☒ AUTOMATIC ☐ MANUAL CORE SIZE: ☐ -B____ ☐ -N NXWL ☐ -H____ HAND TOOLS: ☐ POST HOLE DIGGER ☐ HAND AUGER ☐ SOUNDING ROD ☐ VANE SHEAR TEST </td> </tr> </table>				DRILL UNITS: ☐ MOBILE B-____ ☐ BK-51 ☐ CME-45C ☒ CME-550 ☐ PORTABLE HOIST	ADVANCING TOOLS: ☐ CLAY BITS ☐ 6" CONTINUOUS FLIGHT AUGER ☐ 8" HOLLOW AUGERS ☐ HARD FACED FINGER BITS ☐ TUNG.-CARBIDE INSERTS ☒ CASING ☒ W/ ADVANCER ☐ TRICONE _____ * STEEL TEETH ☐ TRICONE _____ * TUNG.-CARB. ☒ CORE BIT	HAMMER TYPE: ☒ AUTOMATIC ☐ MANUAL CORE SIZE: ☐ -B____ ☐ -N NXWL ☐ -H____ HAND TOOLS: ☐ POST HOLE DIGGER ☐ HAND AUGER ☐ SOUNDING ROD ☐ VANE SHEAR TEST																																																							
U.S. STD. SIEVE SIZE	4	10	40	60	200	270																																																																									
OPENING (MM)	4.76	2.00	0.42	0.25	0.075	0.053																																																																									
DRILL UNITS: ☐ MOBILE B-____ ☐ BK-51 ☐ CME-45C ☒ CME-550 ☐ PORTABLE HOIST	ADVANCING TOOLS: ☐ CLAY BITS ☐ 6" CONTINUOUS FLIGHT AUGER ☐ 8" HOLLOW AUGERS ☐ HARD FACED FINGER BITS ☐ TUNG.-CARBIDE INSERTS ☒ CASING ☒ W/ ADVANCER ☐ TRICONE _____ * STEEL TEETH ☐ TRICONE _____ * TUNG.-CARB. ☒ CORE BIT	HAMMER TYPE: ☒ AUTOMATIC ☐ MANUAL CORE SIZE: ☐ -B____ ☐ -N NXWL ☐ -H____ HAND TOOLS: ☐ POST HOLE DIGGER ☐ HAND AUGER ☐ SOUNDING ROD ☐ VANE SHEAR TEST																																																																													
SOIL MOISTURE - CORRELATION OF TERMS				PLASTICITY																																																																											
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL - LIQUID LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>PL - PLASTIC LIMIT</td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>OM - OPTIMUM MOISTURE</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>SL - SHRINKAGE LIMIT</td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>				SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	PL - PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th>NONPLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> <tr> <td>LOW PLASTICITY</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MED. PLASTICITY</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGH PLASTICITY</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </table>				NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	LOW PLASTICITY	0-5	VERY LOW	MED. PLASTICITY	6-15	SLIGHT	HIGH PLASTICITY	16-25	MEDIUM		26 OR MORE	HIGH																																										
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																													
LL - LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																													
PL - PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																													
OM - OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																													
SL - SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																													
NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																													
LOW PLASTICITY	0-5	VERY LOW																																																																													
MED. PLASTICITY	6-15	SLIGHT																																																																													
HIGH PLASTICITY	16-25	MEDIUM																																																																													
	26 OR MORE	HIGH																																																																													
COLOR				DESCRIPTIONS																																																																											
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.				DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																																																																											

		PROJECT REFERENCE NO. 17BP.14.R.99	SHEET NO. 2A/6
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS			
ROCK DESCRIPTION		TERMS AND DEFINITIONS	
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:		ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.	
WEATHERED ROCK (WR)		NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.	
CRYSTALLINE ROCK (CR)		FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.	
NON-CRYSTALLINE ROCK (NCR)		FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.	
COASTAL PLAIN SEDIMENTARY ROCK (CP)		COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.	
WEATHERING			
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.		
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.		
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.		
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.		
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL		
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT, SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, YIELDS SPT N VALUES > 100 BPF		
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. IF TESTED, YIELDS SPT N VALUES < 100 BPF		
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.		
ROCK HARDNESS			
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.		
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.		
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.		
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.		
SOFT	CAN BE GROOVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.		
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.		
FRACTURE SPACING		BEDDING	
TERM	SPACING	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	> 4 FEET
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
		THINLY LAMINATED	< 0.008 FEET
INDURATION			
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.			
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.		
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.		
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.		
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.		
BENCH MARK: BM #2: -BL- STA. 7+22.19 23.09°RT		RR SPIKE IN BASE OF 18" POPLAR	
		ELEVATION: 3865.41 FT.	
NOTES:			

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.14.R.99	3	6

BM #2 ELEV=3865.41'
 -BL- STA. 7+22.19 23.09' RT
 R/R SPIKE SET IN BASE OF 18' POPLAR

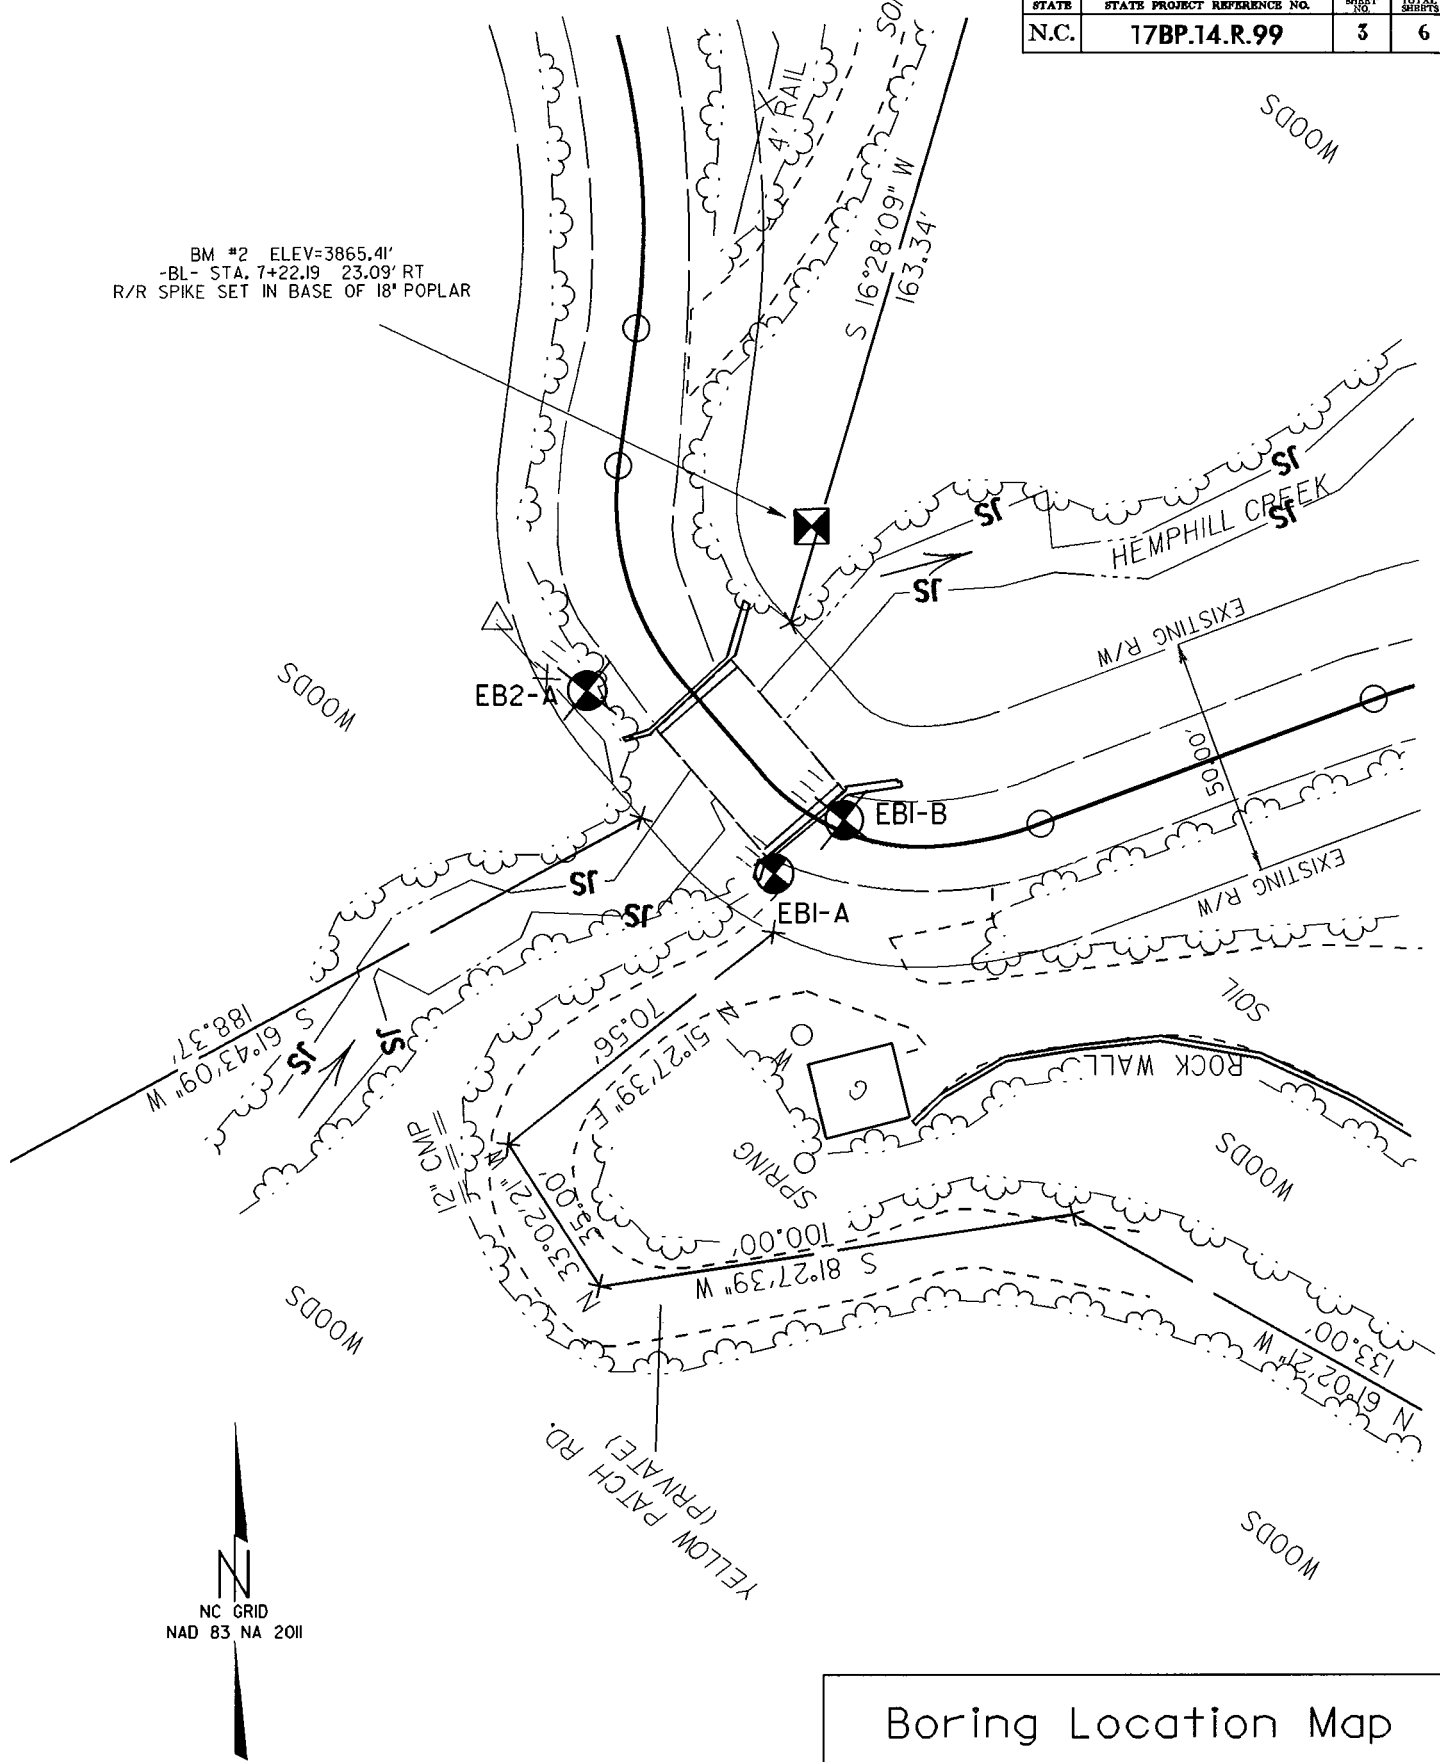

Boring Location Map


Haywood County Bridge 326
 on SR-1318 over Hemphill Ck.

0 40 80



Scale

DRAWN BY: **PQ Lockamy**

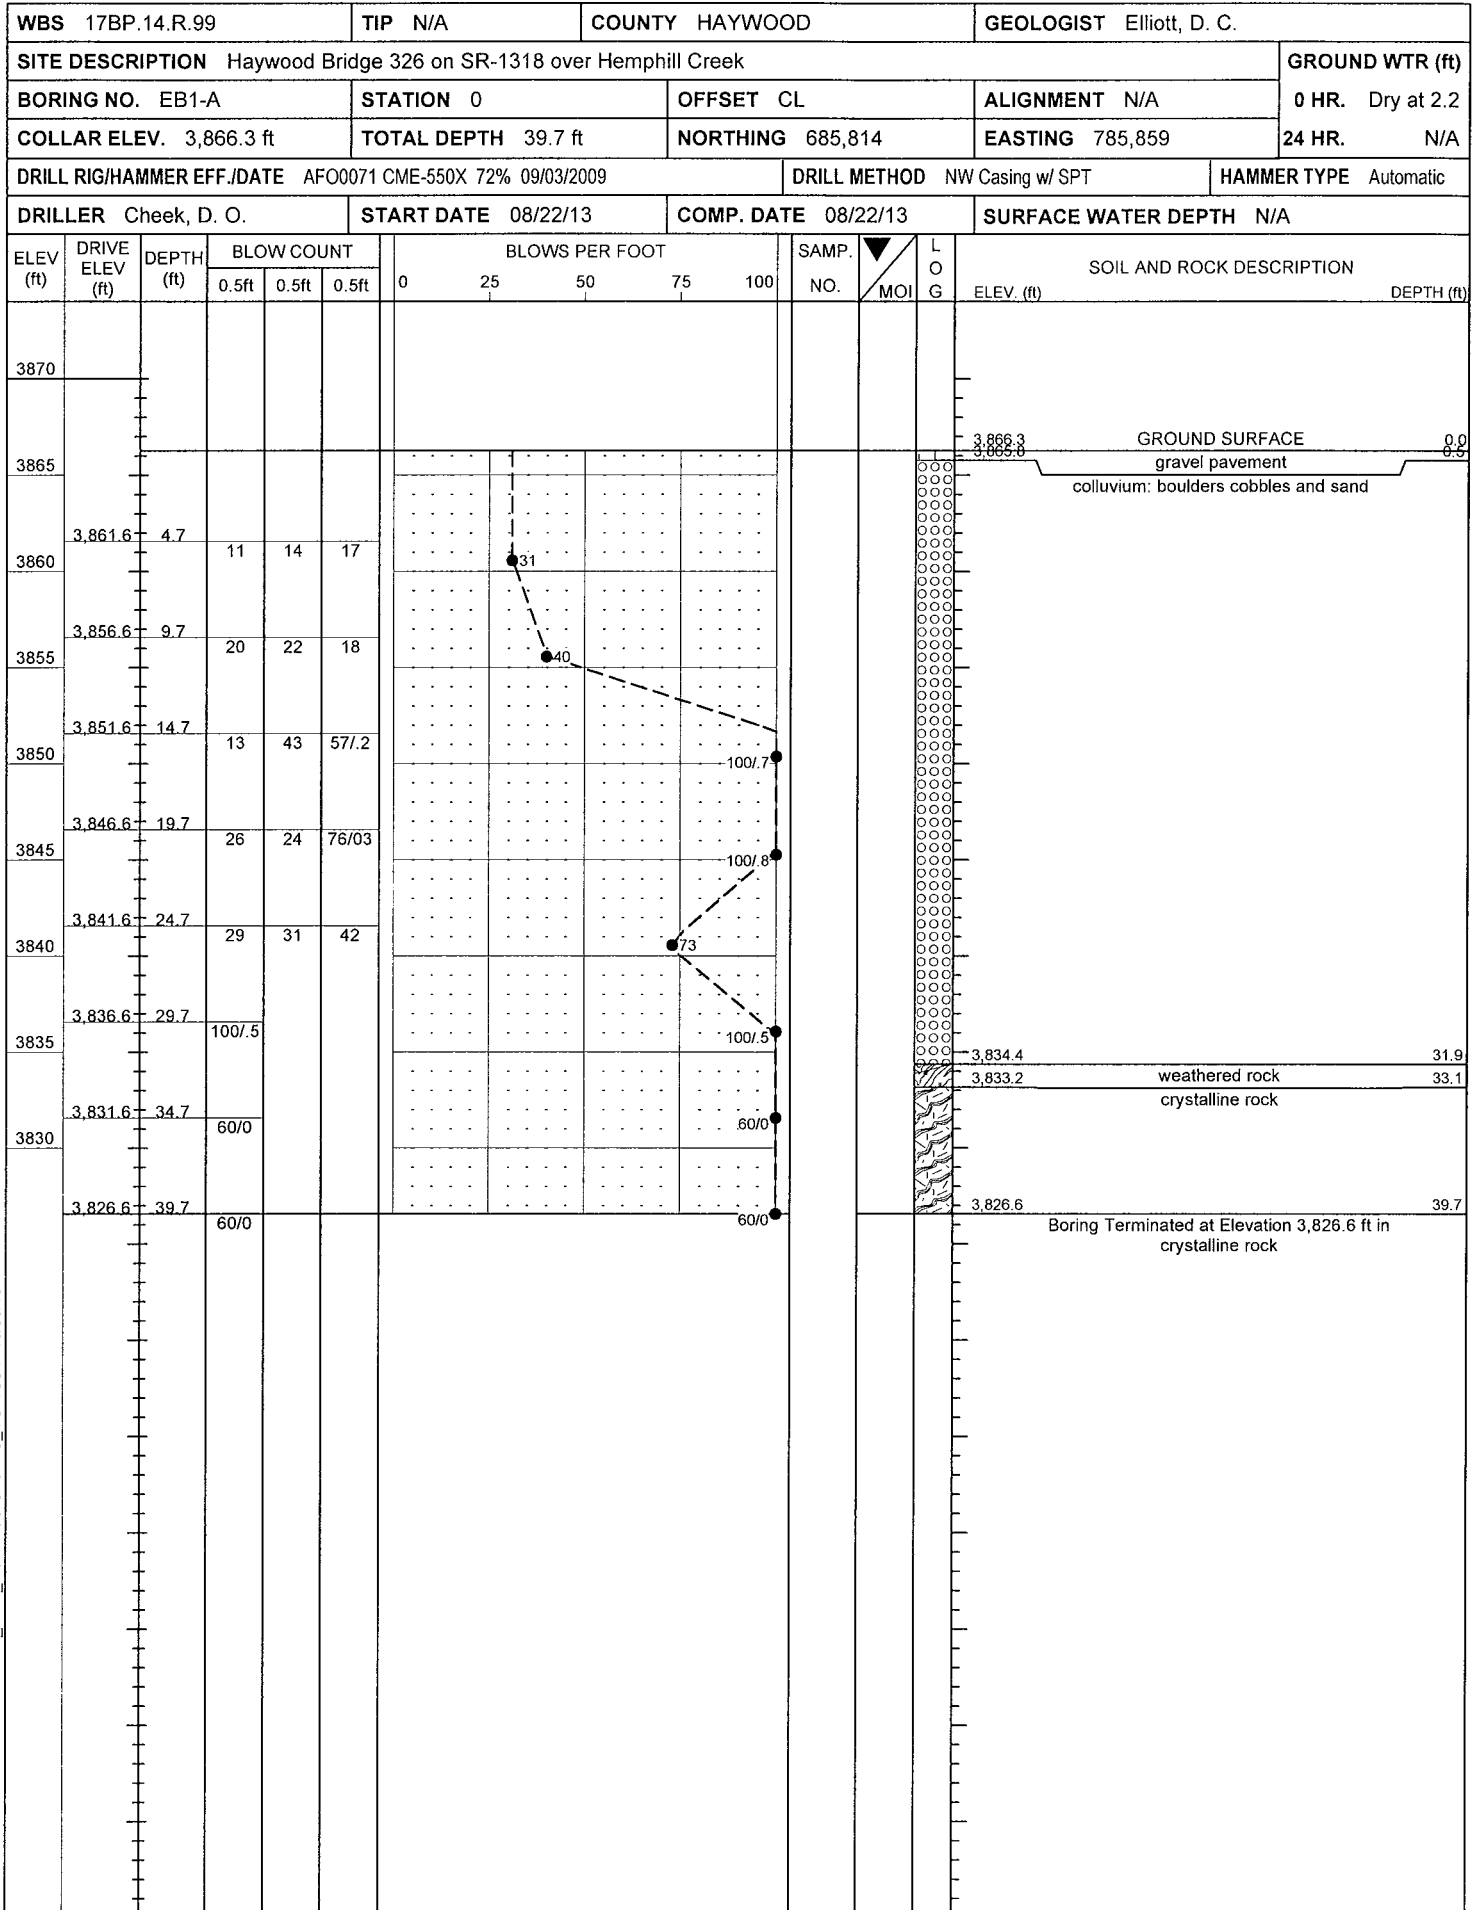



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET

5/6

WBS 17BP.14.R.99		TIP N/A		COUNTY HAYWOOD		GEOLOGIST Elliott, D. C.								
SITE DESCRIPTION Haywood Bridge 326 on SR-1318 over Hemphill Creek						GROUND WTR (ft)								
BORING NO. EB1-B		STATION 0		OFFSET CL		ALIGNMENT N/A								
COLLAR ELEV. 3,865.4 ft		TOTAL DEPTH 39.3 ft		NORTHING 685,826		EASTING 785,873								
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing W/SPT & Core		HAMMER TYPE Automatic								
DRILLER Cheek, D. O.		START DATE 08/23/13		COMP. DATE 08/23/13		SURFACE WATER DEPTH N/A								
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT				SAMP. NO.	LOG MOI	L O G	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75				100	ELEV. (ft)
3870														
3865													3,865.4	GROUND SURFACE 0.0
													3,862.8	embankment: cored - no recovery 2.6
3860														colluvium: cored - boulders and sandy soil. cored 4.3 - 27.6 Rec = 59% gneissic boulders, quartz cobbles and rounded gravel.
3855														
3850														
3845														
3840														
3835													3,837.8	core 2 bedrock - rec=100% RQD=41% gneiss, mod. weathering, mod. hard. 27.6
													3,836.1	core 3 gneiss rec=64% RQD=36%. mod. severe to mod. weathering, soft to mod. hard. 29.3
3830													3,831.1	core 4 gneiss rec=78% RQD=50% weak foliation, fractures at 70 degrees with fe and mn oxide stains. Mod. weathering, mod. hard. 34.3
													3,825.5	Boring Terminated at Elevation 3,826.1 ft in crystalline rock 39.9

NCDOT BORE SINGLE 17BP.14.R.99_GEO_BORINGS.GPJ NC_DOT_GDT 10/30/13



NCDOT GEOTECHNICAL ENGINEERING UNIT

BORELOG REPORT

SHEET

6/6

WBS 17BP.14.R.99		TIP N/A		COUNTY HAYWOOD		GEOLOGIST Elliott, D. C.									
SITE DESCRIPTION Haywood Bridge 326 on SR-1318 over Hemphill Creek							GROUND WTR (ft)								
BORING NO. EB2-A		STATION 0		OFFSET CL		ALIGNMENT N/A									
COLLAR ELEV. 3,868.5 ft		TOTAL DEPTH 23.9 ft		NORTHING 685,852		EASTING 785,820									
DRILL RIG/HAMMER EFF./DATE AFO0071 CME-550X 72% 09/03/2009				DRILL METHOD NW Casing W/SPT & Core		HAMMER TYPE Automatic									
DRILLER Cheek, D. O.		START DATE 08/22/13		COMP. DATE 08/22/13		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					ELEV. (ft)
3870															
														3,868.5	GROUND SURFACE 0.0
															embankment: brown sandy silt
3865	3,864.4	4.1	1	1	3									3,862.6	5.9
															crystalline rock penetrated by advancer
3860	3,859.4	9.1								60/0					
3855	3,854.4	14.1								60/0					
3850	3,849.4	19.1								60/0				3,849.4	19.1
															Core 1 19.1 - 23.9 Rec=90% RQD=79% biotite gneiss with white feldspar augens, moderate to slight weathering, moderately hard. breaks on foliation at 40 degrees and oblique fractures at 70 degrees. soil at 20.1-20.3.
3845														3,844.6	23.9
															Boring Terminated at Elevation 3,844.6 ft in crystalline rock