

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.6.R.60	1	8

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

PROJ. REFERENCE NO. 17BP.6.R.60 F.A. PROJ. N/A
COUNTY COLUMBUS
PROJECT DESCRIPTION 230118-BRIDGE NO. 118 ON SR 1317
(CHADBOURN-CLARENDON RD.) OVER GUM SWAMP

SITE DESCRIPTION _____

CONTENTS

<u>SHEET</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2, 2A	LEGEND
3	SITE PLAN
4	PROFILE
5-8	BORE LOGS

PERSONNEL

O. B. OTI

D. G. PINTER

H. R. CONLEY

J. R. MATULA

INVESTIGATED BY N.D. MOHS

CHECKED BY N.T. ROBERSON

SUBMITTED BY N.T. ROBERSON

DATE AUGUST 2014

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF PREPARING THE SCOPE OF WORK TO BE INCLUDED IN THE REQUEST FOR PROPOSAL. THE VARIOUS FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES, AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.


SOIL AND ROCK BOUNDARIES WITHIN A BOREHOLE ARE BASED ON GEOTECHNICAL INTERPRETATION UNLESS ENCOUNTERED IN A SAMPLE. INTERPRETED BOUNDARIES MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLED STRATA, AND BOREHOLE INFORMATION MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION, AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTE - THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS BEING ACCURATE NOR IT IS CONSIDERED TO BE PART OF THE PLANS, SPECIFICATIONS, OR CONTRACT FOR THE PROJECT.

NOTE - BY HAVING REQUESTED THIS INFORMATION THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

DRAWN BY: W. D. FIELDS



DocuSigned by:

Nathan D. Mohs

CB814151D7B34AE...

8/7/2014

PROJECT REFERENCE NO. I7BP.6.R.60 SHEET NO. 2																																																																																																																									
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION DIVISION OF HIGHWAYS GEOTECHNICAL ENGINEERING UNIT SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS																																																																																																																									
SOIL DESCRIPTION			GRADATION																																																																																																																						
SOIL IS CONSIDERED TO BE THE UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER, AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO STANDARD PENETRATION TEST (AASHTO T206, ASTM D-1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY SHALL INCLUDE: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. EXAMPLE: <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>			WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORM - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. (ALSO POORLY GRADED) GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLES OF TWO OR MORE SIZES.																																																																																																																						
SOIL LEGEND AND AASHTO CLASSIFICATION			ANGULARITY OF GRAINS																																																																																																																						
<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>GENERAL CLASS.</th> <th colspan="4">GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th colspan="4">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="3">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th colspan="2">A-1</th> <th>A-3</th> <th colspan="2">A-2</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th colspan="2">A-1, A-2 A-3</th> <th>A-4, A-5 A-6, A-7</th> </tr> <tr> <th>SYMBOL</th> <td colspan="2"></td> <td></td> <td colspan="2"></td> <td></td> <td></td> <td></td> <td></td> <td colspan="2"></td> <td></td> </tr> <tr> <th>% PASSING</th> <td colspan="2">50 MX 30 MX 50 MX 15 MX 25 MX</td> <td>51 MN 10 MX</td> <td colspan="2">35 MX 35 MX 35 MX 35 MX</td> <td>36 MN 10 MX</td> <td>36 MN 10 MX</td> <td>36 MN 10 MX</td> <td>36 MN 10 MX</td> <td colspan="2">GRANULAR SOILS</td> <td>SILT-CLAY SOILS</td> </tr> <tr> <th>LIQUID LIMIT</th> <td colspan="2">6 MX</td> <td>NP</td> <td colspan="2">40 MX 41 MN 10 MX 10 MX</td> <td>40 MX 41 MN 10 MX 10 MX</td> <td>40 MX 41 MN 10 MX 10 MX</td> <td>40 MX 41 MN 10 MX 10 MX</td> <td>40 MX 41 MN 10 MX 10 MX</td> <td colspan="2">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> <td>HIGHLY ORGANIC SOILS</td> </tr> <tr> <th>PLASTIC INDEX</th> <td colspan="2">6 MX</td> <td>NP</td> <td colspan="2">4 MX</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> <td>No MX</td> <td colspan="2"></td> <td></td> </tr> <tr> <th>GROUP INDEX</th> <td colspan="2">0</td> <td>0</td> <td colspan="2">0</td> <td>4 MX</td> <td>8 MX</td> <td>12 MX</td> <td>16 MX</td> <td>No MX</td> <td colspan="2"></td> </tr> <tr> <th>USUAL TYPES OF MAJOR MATERIALS</th> <td colspan="2">STONE FRAGS, GRAVEL, AND SAND</td> <td>FINE SAND</td> <td colspan="2">SILTY OR CLAYEY GRAVEL AND SAND</td> <td>SILTY SOILS</td> <td colspan="2">CLAYEY SOILS</td> <td colspan="3"></td> <td></td> </tr> <tr> <th>GENERAL RATING AS A SUBGRADE</th> <td colspan="4">EXCELLENT TO GOOD</td> <td colspan="4">FAIR TO POOR</td> <td colspan="2">FAIR TO POOR</td> <td>POOR</td> <td>UNSATISFACTORY</td> </tr> </table>			GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)				SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS			GROUP CLASS.	A-1		A-3	A-2		A-4	A-5	A-6	A-7	A-1, A-2 A-3		A-4, A-5 A-6, A-7	SYMBOL													% PASSING	50 MX 30 MX 50 MX 15 MX 25 MX		51 MN 10 MX	35 MX 35 MX 35 MX 35 MX		36 MN 10 MX	36 MN 10 MX	36 MN 10 MX	36 MN 10 MX	GRANULAR SOILS		SILT-CLAY SOILS	LIQUID LIMIT	6 MX		NP	40 MX 41 MN 10 MX 10 MX		40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS	PLASTIC INDEX	6 MX		NP	4 MX		8 MX	12 MX	16 MX	No MX				GROUP INDEX	0		0	0		4 MX	8 MX	12 MX	16 MX	No MX			USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND		FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS	CLAYEY SOILS						GENERAL RATING AS A SUBGRADE	EXCELLENT TO GOOD				FAIR TO POOR				FAIR TO POOR		POOR	UNSATISFACTORY	MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHENEVER THEY ARE CONSIDERED OF SIGNIFICANCE.		
GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)				SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS																																																																																																																
GROUP CLASS.	A-1		A-3	A-2		A-4	A-5	A-6	A-7	A-1, A-2 A-3		A-4, A-5 A-6, A-7																																																																																																													
SYMBOL																																																																																																																									
% PASSING	50 MX 30 MX 50 MX 15 MX 25 MX		51 MN 10 MX	35 MX 35 MX 35 MX 35 MX		36 MN 10 MX	36 MN 10 MX	36 MN 10 MX	36 MN 10 MX	GRANULAR SOILS		SILT-CLAY SOILS																																																																																																													
LIQUID LIMIT	6 MX		NP	40 MX 41 MN 10 MX 10 MX		40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	40 MX 41 MN 10 MX 10 MX	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS																																																																																																													
PLASTIC INDEX	6 MX		NP	4 MX		8 MX	12 MX	16 MX	No MX																																																																																																																
GROUP INDEX	0		0	0		4 MX	8 MX	12 MX	16 MX	No MX																																																																																																															
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND		FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS	CLAYEY SOILS																																																																																																																		
GENERAL RATING AS A SUBGRADE	EXCELLENT TO GOOD				FAIR TO POOR				FAIR TO POOR		POOR	UNSATISFACTORY																																																																																																													
COMPRESSIBILITY			PERCENTAGE OF MATERIAL																																																																																																																						
SLIGHTLY COMPRESSIBLE MODERATELY COMPRESSIBLE HIGHLY COMPRESSIBLE			LIQUID LIMIT LESS THAN 31 LIQUID LIMIT EQUAL TO 31-50 LIQUID LIMIT GREATER THAN 50																																																																																																																						
<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>>10%</td> <td>>20%</td> <td>HIGHLY</td> </tr> </table>			ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME	HIGHLY ORGANIC	>10%	>20%	HIGHLY	1 - 10% 10 - 20% 20 - 35% 35% AND ABOVE																																																																																																		
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																						
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE																																																																																																																						
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE																																																																																																																						
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME																																																																																																																						
HIGHLY ORGANIC	>10%	>20%	HIGHLY																																																																																																																						
GROUND WATER			MISCELLANEOUS SYMBOLS																																																																																																																						
WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING STATIC WATER LEVEL AFTER 24 HOURS PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA SPRING OR SEEP			<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <td></td> <td>ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</td> <td></td> <td>TEST BORING</td> <td></td> <td>TEST BORING W/ CORE</td> </tr> <tr> <td></td> <td>SOIL SYMBOL</td> <td></td> <td>AUGER BORING</td> <td></td> <td>SPT N-VALUE</td> </tr> <tr> <td></td> <td>ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</td> <td></td> <td>CORE BORING</td> <td></td> <td>SPT REFUSAL</td> </tr> <tr> <td></td> <td>INFERRED SOIL BOUNDARY</td> <td></td> <td>MONITORING WELL</td> <td></td> <td></td> </tr> <tr> <td></td> <td>INFERRED ROCK LINE</td> <td></td> <td>PIEZOMETER INSTALLATION</td> <td></td> <td></td> </tr> <tr> <td></td> <td>ALLUVIAL SOIL BOUNDARY</td> <td></td> <td>SLOPE INDICATOR INSTALLATION</td> <td></td> <td></td> </tr> <tr> <td></td> <td>DIP & DIP DIRECTION OF ROCK STRUCTURES</td> <td></td> <td>CONE PENETROMETER TEST</td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> <td>SOUNDING ROD</td> <td></td> <td></td> </tr> </table>				ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		TEST BORING		TEST BORING W/ CORE		SOIL SYMBOL		AUGER BORING		SPT N-VALUE		ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		CORE BORING		SPT REFUSAL		INFERRED SOIL BOUNDARY		MONITORING WELL				INFERRED ROCK LINE		PIEZOMETER INSTALLATION				ALLUVIAL SOIL BOUNDARY		SLOPE INDICATOR INSTALLATION				DIP & DIP DIRECTION OF ROCK STRUCTURES		CONE PENETROMETER TEST						SOUNDING ROD																																																																						
	ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		TEST BORING		TEST BORING W/ CORE																																																																																																																				
	SOIL SYMBOL		AUGER BORING		SPT N-VALUE																																																																																																																				
	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		CORE BORING		SPT REFUSAL																																																																																																																				
	INFERRED SOIL BOUNDARY		MONITORING WELL																																																																																																																						
	INFERRED ROCK LINE		PIEZOMETER INSTALLATION																																																																																																																						
	ALLUVIAL SOIL BOUNDARY		SLOPE INDICATOR INSTALLATION																																																																																																																						
	DIP & DIP DIRECTION OF ROCK STRUCTURES		CONE PENETROMETER TEST																																																																																																																						
			SOUNDING ROD																																																																																																																						
TEXTURE OR GRAIN SIZE			ABBREVIATIONS																																																																																																																						
<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>U.S. STD. SIEVE SIZE</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <th>OPENING (MM)</th> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </table>			U.S. STD. SIEVE SIZE	4	10	40	60	200	270	OPENING (MM)	4.76	2.00	0.42	0.25	0.075	0.053	<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F. SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td>MM 305</td> <td>75</td> <td>2.0</td> <td>0.25</td> <td>0.05</td> <td>0.005</td> <td></td> </tr> <tr> <td>IN. 12</td> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>			BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F. SD.)	SILT (SL.)	CLAY (CL.)	MM 305	75	2.0	0.25	0.05	0.005		IN. 12	3																																																																																						
U.S. STD. SIEVE SIZE	4	10	40	60	200	270																																																																																																																			
OPENING (MM)	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																			
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F. SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																			
MM 305	75	2.0	0.25	0.05	0.005																																																																																																																				
IN. 12	3																																																																																																																								
SOIL MOISTURE - CORRELATION OF TERMS			SAMPLE ABBREVIATIONS																																																																																																																						
<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td rowspan="3"> LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT </td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td></td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>			SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE		- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <td>AR - AUGER REFUSAL</td> <td>MED. - MEDIUM</td> <td>VST - VANE SHEAR TEST</td> </tr> <tr> <td>BT - BORING TERMINATED</td> <td>MICA - MICACEOUS</td> <td>WEA. - WEATHERED</td> </tr> <tr> <td>CL - CLAY</td> <td>MOD. - MODERATELY</td> <td>γ - UNIT WEIGHT</td> </tr> <tr> <td>CPT - CONE PENETRATION TEST</td> <td>NP - NON PLASTIC</td> <td>γ_d - DRY UNIT WEIGHT</td> </tr> <tr> <td>CSE. - COARSE</td> <td>ORG. - ORGANIC</td> <td></td> </tr> <tr> <td>DMT - DILATOMETER TEST</td> <td>PMT - PRESSUREMETER TEST</td> <td></td> </tr> <tr> <td>DPT - DYNAMIC PENETRATION TEST</td> <td>SAP. - SAPROLITIC</td> <td></td> </tr> <tr> <td>e - VOID RATIO</td> <td>SD. - SAND, SANDY</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>SL. - SILT, SILTY</td> <td></td> </tr> <tr> <td>FOSS. - FOSSILIFEROUS</td> <td>SLI. - SLIGHTLY</td> <td></td> </tr> <tr> <td>FRAC. - FRACTURED, FRACTURES</td> <td>TCR - TRICONE REFUSAL</td> <td></td> </tr> <tr> <td>FRAGS. - FRAGMENTS</td> <td>w - MOISTURE CONTENT</td> <td></td> </tr> <tr> <td>HI. - HIGHLY</td> <td>V - VERY</td> <td></td> </tr> </table>			AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST	BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED	CL - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT	CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT	CSE. - COARSE	ORG. - ORGANIC		DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST		DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC		e - VOID RATIO	SD. - SAND, SANDY		F - FINE	SL. - SILT, SILTY		FOSS. - FOSSILIFEROUS	SLI. - SLIGHTLY		FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL		FRAGS. - FRAGMENTS	w - MOISTURE CONTENT		HI. - HIGHLY	V - VERY																																																																	
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																							
LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																							
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																							
	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																							
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																							
AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST																																																																																																																							
BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED																																																																																																																							
CL - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT																																																																																																																							
CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT																																																																																																																							
CSE. - COARSE	ORG. - ORGANIC																																																																																																																								
DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST																																																																																																																								
DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC																																																																																																																								
e - VOID RATIO	SD. - SAND, SANDY																																																																																																																								
F - FINE	SL. - SILT, SILTY																																																																																																																								
FOSS. - FOSSILIFEROUS	SLI. - SLIGHTLY																																																																																																																								
FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL																																																																																																																								
FRAGS. - FRAGMENTS	w - MOISTURE CONTENT																																																																																																																								
HI. - HIGHLY	V - VERY																																																																																																																								
PLASTICITY			EQUIPMENT USED ON SUBJECT PROJECT																																																																																																																						
<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>NONPLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> <tr> <td>LOW PLASTICITY</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MED. PLASTICITY</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGH PLASTICITY</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </table>			NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	LOW PLASTICITY	0-5	VERY LOW	MED. PLASTICITY	6-15	SLIGHT	HIGH PLASTICITY	16-25	MEDIUM		26 OR MORE	HIGH	<table border="1" style="width:100%; border-collapse: collapse; font-size: 8px;"> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> </tr> <tr> <td>☐ MOBILE B- _____</td> <td>☒ CLAY BITS</td> <td>☒ AUTOMATIC ☐ MANUAL</td> </tr> <tr> <td>☐ BK-51</td> <td>☐ 6" CONTINUOUS FLIGHT AUGER</td> <td></td> </tr> <tr> <td>☐ CME-45C</td> <td>☐ 8" HOLLOW AUGERS</td> <td></td> </tr> <tr> <td>☐ CME-550</td> <td>☐ HARD FACED FINGER BITS</td> <td></td> </tr> <tr> <td>☐ PORTABLE HOIST</td> <td>☐ TUNG.-CARBIDE INSERTS</td> <td></td> </tr> <tr> <td>☒ CME-55</td> <td>☒ CASING ☐ W/ ADVANCER</td> <td></td> </tr> <tr> <td>☐ _____</td> <td>☐ TRICONE _____ * STEEL TEETH</td> <td></td> </tr> <tr> <td></td> <td>☐ TRICONE _____ * TUNG.-CARB.</td> <td></td> </tr> <tr> <td></td> <td>☐ CORE BIT</td> <td></td> </tr> <tr> <td></td> <td>☐ _____</td> <td></td> </tr> </table>			DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	☐ MOBILE B- _____	☒ CLAY BITS	☒ AUTOMATIC ☐ MANUAL	☐ BK-51	☐ 6" CONTINUOUS FLIGHT AUGER		☐ CME-45C	☐ 8" HOLLOW AUGERS		☐ CME-550	☐ HARD FACED FINGER BITS		☐ PORTABLE HOIST	☐ TUNG.-CARBIDE INSERTS		☒ CME-55	☒ CASING ☐ W/ ADVANCER		☐ _____	☐ TRICONE _____ * STEEL TEETH			☐ TRICONE _____ * TUNG.-CARB.			☐ CORE BIT			☐ _____																																																																					
NONPLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																																							
LOW PLASTICITY	0-5	VERY LOW																																																																																																																							
MED. PLASTICITY	6-15	SLIGHT																																																																																																																							
HIGH PLASTICITY	16-25	MEDIUM																																																																																																																							
	26 OR MORE	HIGH																																																																																																																							
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																																							
☐ MOBILE B- _____	☒ CLAY BITS	☒ AUTOMATIC ☐ MANUAL																																																																																																																							
☐ BK-51	☐ 6" CONTINUOUS FLIGHT AUGER																																																																																																																								
☐ CME-45C	☐ 8" HOLLOW AUGERS																																																																																																																								
☐ CME-550	☐ HARD FACED FINGER BITS																																																																																																																								
☐ PORTABLE HOIST	☐ TUNG.-CARBIDE INSERTS																																																																																																																								
☒ CME-55	☒ CASING ☐ W/ ADVANCER																																																																																																																								
☐ _____	☐ TRICONE _____ * STEEL TEETH																																																																																																																								
	☐ TRICONE _____ * TUNG.-CARB.																																																																																																																								
	☐ CORE BIT																																																																																																																								
	☐ _____																																																																																																																								
COLOR			HAND TOOLS:																																																																																																																						
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.			☐ POST HOLE DIGGER ☐ HAND AUGER ☐ SOUNDING ROD ☐ VANE SHEAR TEST																																																																																																																						

		PROJECT REFERENCE NO.	SHEET NO.
		17BP.6.R.60	2A
NORTH CAROLINA DEPARTMENT OF TRANSPORTATION			
DIVISION OF HIGHWAYS			
GEOTECHNICAL ENGINEERING UNIT			
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS			
ROCK DESCRIPTION		TERMS AND DEFINITIONS	
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT IF TESTED, WOULD YIELD SPT REFUSAL. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. IN NON-COASTAL PLAIN MATERIAL, THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:		ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.	
	NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.		
	FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.		
	FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.		
	COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.		
WEATHERING			
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.		
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.		
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.		
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.		
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>		
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, YIELDS SPT N VALUES > 100 BPF</u>		
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT THE MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE SUCH THAT ONLY MINOR VESTIGES OF THE ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, YIELDS SPT N VALUES < 100 BPF</u>		
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.		
ROCK HARDNESS			
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.		
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.		
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.		
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.		
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.		
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.		
FRACTURE SPACING		BEDDING	
TERM	SPACING	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	> 4 FEET
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
		THINLY LAMINATED	< 0.008 FEET
INDURATION			
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF THE MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.			
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.		
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.		
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.		
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.		
		BENCH MARK: BL-2	
		ELEVATION: 84.18 FT.	
		NOTES: ELEVATION PROVIDED BY LOCATIONS & SURVEYS FIELD CREW.	

PROJECT REFERENCE NO.

17BP.6.R.60


SHEET

3


SITE PLAN

02040

FEET



RR TRACKS



GUM SWAMP

EB 1 - A



10+00

BL-2 (APPROX.)



11+00

-L-


SR 1317 (CHADBOURN-CLARENDON RD.)

BR*118



EB 2 - B

NOTE: ALL FEATURES DRAWN
BY GEU FROM NCONEMAP.
STATIONING IS ASSUMED.

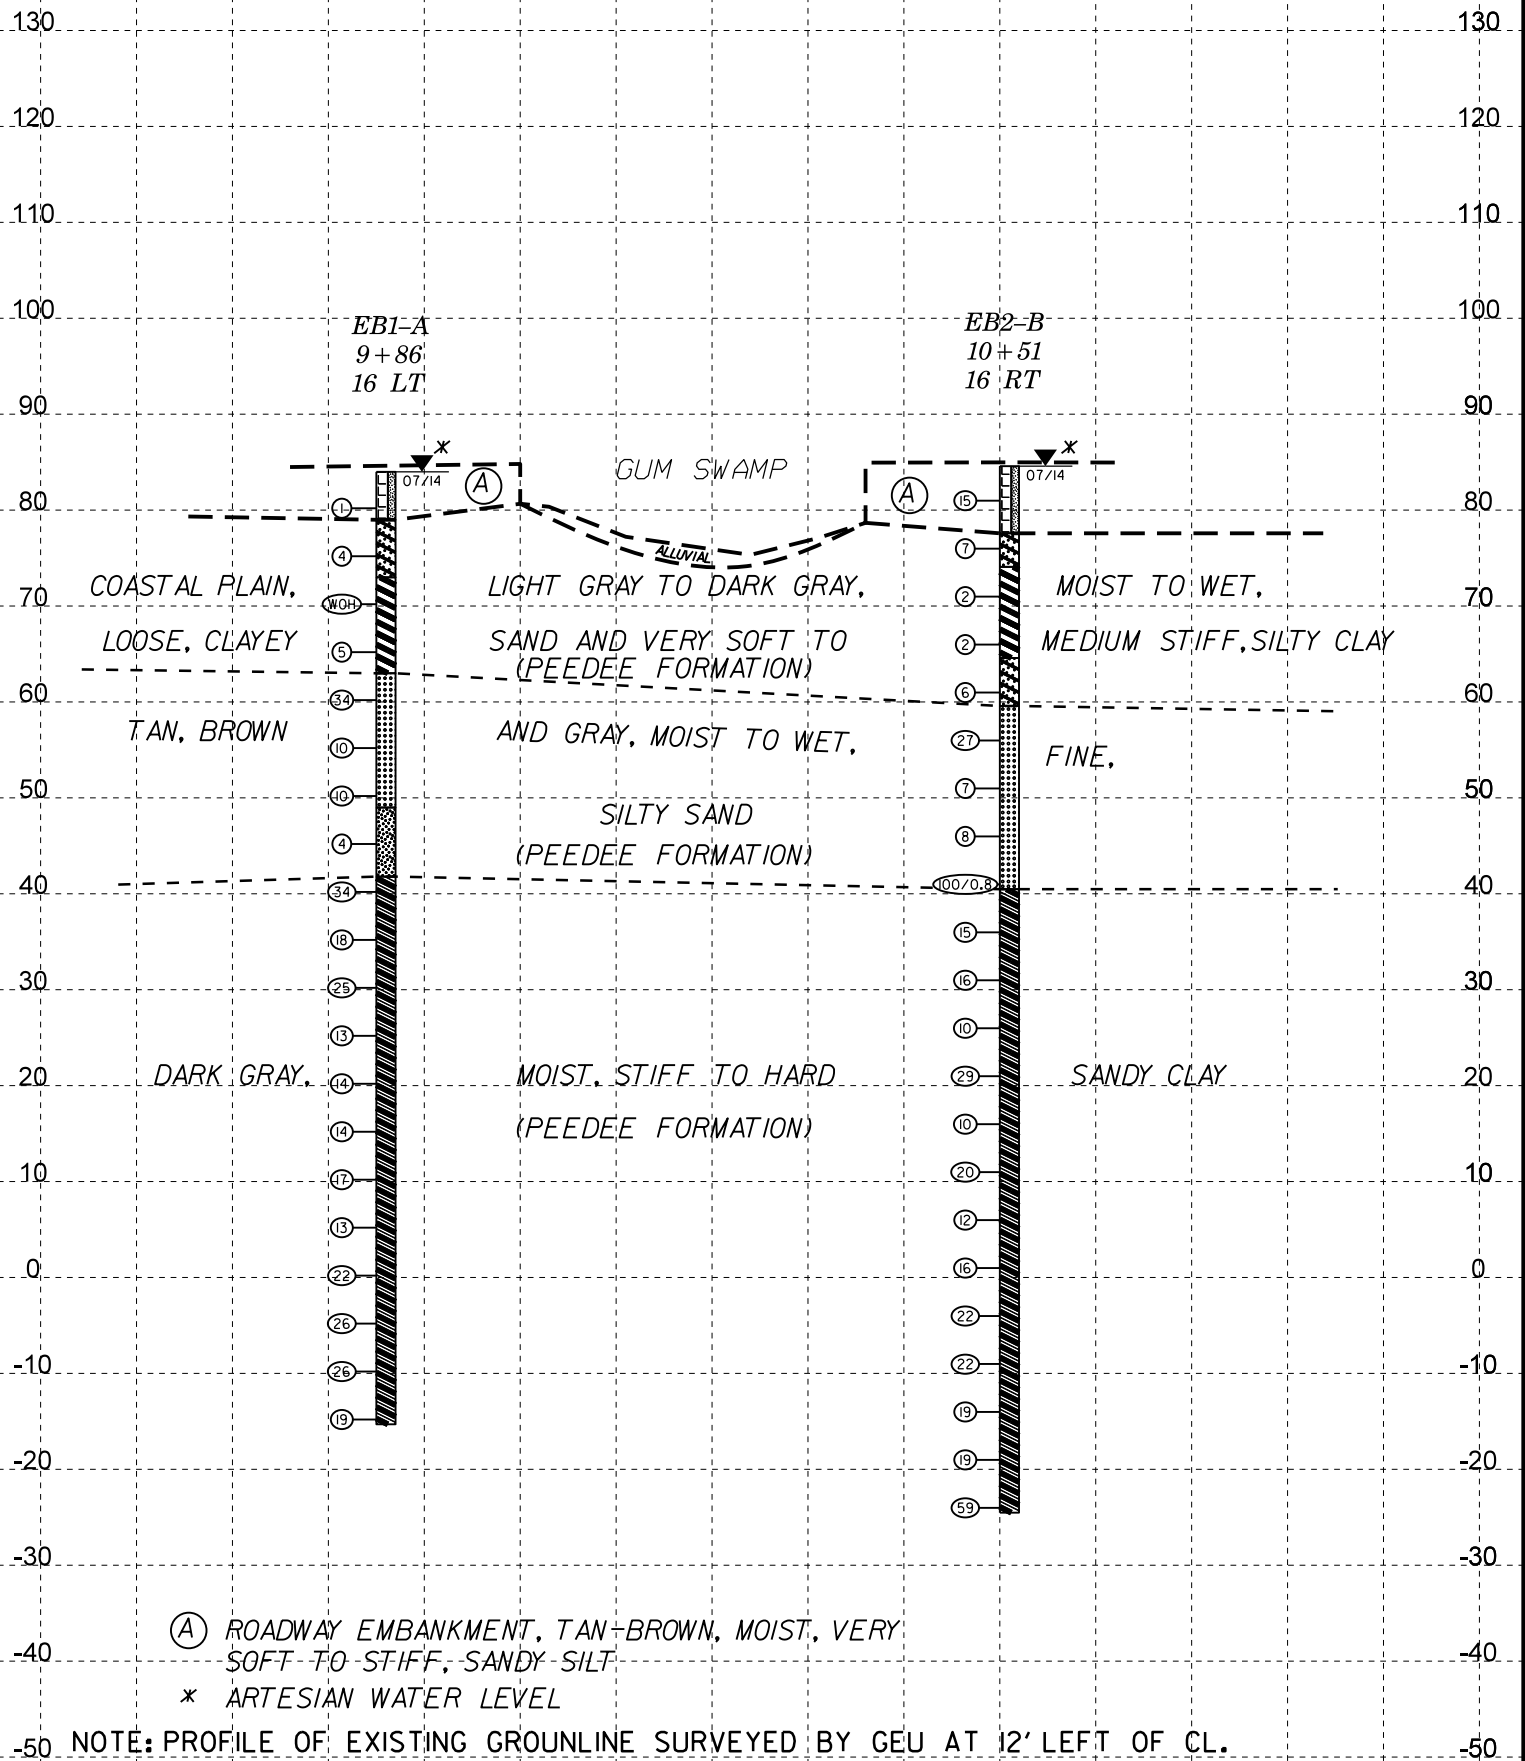

[illegible]



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 6

WBS 17BP.6.R.60		TIP N/A		COUNTY COLUMBUS		GEOLOGIST Oti, O. B.							
SITE DESCRIPTION 230118-BRIDGE NO. 118 ON SR 1317 (CHADBOURN-CLARENDON RD.) OVER GUM SWAMP							GROUND WTR (ft)						
BORING NO. EB1-A		STATION 9+86		OFFSET 16 ft LT		ALIGNMENT -L-							
COLLAR ELEV. 84.0 ft		TOTAL DEPTH 99.3 ft		NORTHING 169,303		EASTING 2,047,200							
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 92% 07/12/2011				DRILL METHOD Mud Rotary		HAMMER TYPE Automatic							
DRILLER Pinter, D. G.		START DATE 07/22/14		COMP. DATE 07/22/14		SURFACE WATER DEPTH N/A							
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT		SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100	ELEV. (ft)	DEPTH (ft)	
5						Match Line							
0	1.2	82.8	7	10	12						M	DARK GRAY, SANDY CLAY (PEEDEE FORMATION) (continued)	
-5	-3.8	87.8	8	11	15						M		
-10	-8.8	92.8	6	11	15						M		
-15	-13.8	97.8	6	9	10						M		
											M	-15.3	99.3
Boring Terminated at Elevation -15.3 ft IN SANDY CLAY (PEEDEE FORMATION)													
*ARTESIAN WATER LEVEL													



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 7

WBS 17BP.6.R.60			TIP N/A		COUNTY COLUMBUS		GEOLOGIST Oti, O. B.								
SITE DESCRIPTION 230118-BRIDGE NO. 118 ON SR 1317 (CHADBOURN-CLARENDON RD.) OVER GUM SWAMP								GROUND WTR (ft)							
BORING NO. EB2-B			STATION 10+51		OFFSET 16 ft RT		ALIGNMENT -L-		0 HR. N/A						
COLLAR ELEV. 84.6 ft			TOTAL DEPTH 109.1 ft		NORTHING 169,360		EASTING 2,047,245		24 HR. 0.0						
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 92% 07/12/2011					DRILL METHOD Mud Rotary			HAMMER TYPE Automatic							
DRILLER Pinter, D. G.			START DATE 07/23/14		COMP. DATE 07/23/14		SURFACE WATER DEPTH N/A								
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)
85														84.6	0.0
80	82.0	2.6	6	9	6								M		
75	77.0	7.6	1	2	5								M	77.6	7.0
70	72.0	12.6	1	1	1								M	74.1	10.5
65	67.0	17.6	1	1	1								M		
60	62.0	22.6	2	2	4								M	64.6	20.0
55	57.0	27.6	3	11	16								M	59.6	25.0
50	52.0	32.6	2	2	5								M		
45	47.0	37.6	2	5	3								M		
40	42.0	42.6	3	6	94.3								M	41.5	43.1
														40.5	44.1
														40.5	44.1
35	37.0	47.6	4	7	8								M		
30	32.0	52.6	5	7	9								M		
25	27.0	57.6	3	5	5								M		
20	22.0	62.6	3	6	23								M		
15	17.0	67.6	4	5	5								M		
10	12.0	72.6	6	9	11								M		
5	7.0	77.6	4	6	6								M		

NCDOT BORE SINGLE 230118_GEO_BRDG0118_BH.GPJ NC_DOT.GDT 8/7/14



NCDOT GEOTECHNICAL ENGINEERING UNIT BORELOG REPORT

SHEET 8

WBS 17BP.6.R.60		TIP N/A		COUNTY COLUMBUS		GEOLOGIST Oti, O. B.						
SITE DESCRIPTION 230118-BRIDGE NO. 118 ON SR 1317 (CHADBOURN-CLARENDON RD.) OVER GUM SWAMP						GROUND WTR (ft)						
BORING NO. EB2-B		STATION 10+51		OFFSET 16 ft RT		ALIGNMENT -L-						
COLLAR ELEV. 84.6 ft		TOTAL DEPTH 109.1 ft		NORTHING 169,360		EASTING 2,047,245						
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 92% 07/12/2011				DRILL METHOD Mud Rotary		HAMMER TYPE Automatic						
DRILLER Pinter, D. G.		START DATE 07/23/14		COMP. DATE 07/23/14		SURFACE WATER DEPTH N/A						
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT		SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100	ELEV. (ft) DEPTH (ft)	
5						Match Line						
0	2.0	82.6	4	6	10	16					M	DARK GRAY, SANDY CLAY (PEEDEE FORMATION) (continued)
-5	-3.0	87.6	8	11	11	22					M	
-10	-8.0	92.6	6	10	12	22					M	
-15	-13.0	97.6	6	8	11	19					M	
-20	-18.0	102.6	6	8	11	19					M	
	-23.0	107.6	9	15	44	59					M	
												-24.5 109.1
											Boring Terminated at Elevation -24.5 ft IN SANDY CLAY (PEEDEE FORMATION)	
											*ARTESIAN WATER LEVEL	