

REFERENCE: B-5657

PROJECT: 45612

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-5657	1	12

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE

SUBSURFACE INVESTIGATION

COUNTY HALIFAX

PROJECT DESCRIPTION BRIDGE 014 AND BRIDGE 015
ON SR 1001 (JUSTICE BRANCH RD.) OVER
BEAVERDAM SWAMP

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
I	TITLE SHEET
2, 2A	LEGEND
3	SITE PLAN
4-II	BORE LOGS

PERSONNEL

N. T. ROBERSONO. B. OTIR. E. SMITHD. G. PINTERINVESTIGATED BY N. T. ROBERSONDRAWN BY N. T. ROBERSONCHECKED BY J. L. PEDROSUBMITTED BY N. T. ROBERSONDATE MAY 2016**CAUTION NOTICE**


THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF PREPARING THE SCOPE OF WORK TO BE INCLUDED IN THE REQUEST FOR PROPOSAL. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

SOIL AND ROCK BOUNDARIES WITHIN A BOREHOLE ARE BASED ON GEOTECHNICAL INTERPRETATION UNLESS ENCOUNTERED IN A SAMPLE. INTERPRETED BOUNDARIES MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLED STRATA AND BOREHOLE INFORMATION MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTES:

- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
- BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.



DocuSigned by:

Neil Roberson

5/3/2016

4061D9A8CC619C
SIGNATURE

DATE

**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS (PAGE 1 OF 2)

SOIL DESCRIPTION

SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6

SOIL LEGEND AND AASHTO CLASSIFICATION

GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)						SILT-CLAY MATERIALS (> 35% PASSING #200)						ORGANIC MATERIALS		
GROUP CLASS.	A-1	A-3	A-2	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7				
SYMBOL															
% PASSING	#10 #40 #200	50 MX 30 MX 15 MX	50 MX 30 MX 15 MX	50 MN 30 MN 15 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	35 MX 35 MN 35 MN	GRANULAR SOILS	SILT-CLAY SOILS	MUCK, PEAT
MATERIAL PASSING #40 LL PI															
GROUP INDEX															
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND	FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND	SILTY SOILS	CLAYEY SOILS										
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD						FAIR TO POOR						FAIR TO POOR	POOR	UNSATISFACTORY

PI OF A-7-5 SUBGROUP IS ≤ LL - 30 ; PI OF A-7-6 SUBGROUP IS > LL - 30

CONSISTENCY OR DENSENESS

PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4

TEXTURE OR GRAIN SIZE

U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270
	4.76	2.00	0.42	0.25	0.075	0.053
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)

GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005
	IN.	12	3				

SOIL MOISTURE - CORRELATION OF TERMS

SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION
LL PLASTIC RANGE (PI) PL	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE
OM SL	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE

PLASTICITY

	PLASTICITY INDEX (PI)	DRY STRENGTH
NON PLASTIC	0-5	VERY LOW
SLIGHTLY PLASTIC	6-15	SLIGHT
MODERATELY PLASTIC	16-25	MEDIUM
HIGHLY PLASTIC	26 OR MORE	HIGH

COLOR

DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.

GRADATION

WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE.
UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE.
GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.

ANGULARITY OF GRAINS

THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.

MINERALOGICAL COMPOSITION

MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.

COMPRESSIBILITY

SLIGHTLY COMPRESSIBLE LL < 31
MODERATELY COMPRESSIBLE LL = 31 - 50
HIGHLY COMPRESSIBLE LL > 50

PERCENTAGE OF MATERIAL

ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE

GROUND WATER

WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING
 STATIC WATER LEVEL AFTER 24 HOURS
 PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA
 SPRING OR SEEP

MISCELLANEOUS SYMBOLS

	ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		DIP & DIP DIRECTION OF ROCK STRUCTURES
	SOIL SYMBOL		TEST BORING
	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		AUGER BORING
	INFERRED SOIL BOUNDARY		CORE BORING
	INFERRED ROCK LINE		MONITORING WELL
	ALLUVIAL SOIL BOUNDARY		PIEZOMETER INSTALLATION
			SLOPE INDICATOR INSTALLATION
			CONE PENETROMETER TEST
			SOUNDING ROD
			TEST BORING WITH CORE
			SPT N-VALUE

RECOMMENDATION SYMBOLS

	UNDERCUT		UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE		UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL
	SHALLOW UNDERCUT		UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK		

ABBREVIATIONS

AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST
BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED
CL - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT
CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT
CSE. - COARSE	ORG. - ORGANIC	
DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST	SAMPLE ABBREVIATIONS
DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC	S - BULK
e - VOID RATIO	SD. - SAND, SANDY	SS - SPLIT SPOON
F - FINE	SL. - SILT, SILTY	ST - SHELBY TUBE
FOSS. - FOSSILIFEROUS	SLI. - SLIGHTLY	RS - ROCK
FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL	RT - RECOMPACT TRIAXIAL
FRAGS. - FRAGMENTS	w - MOISTURE CONTENT	CBR - CALIFORNIA BEARING RATIO
HI. - HIGHLY	V - VERY	

EQUIPMENT USED ON SUBJECT PROJECT

DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:
☐ CME-45C	☐ CLAY BITS	☒ AUTOMATIC ☐ MANUAL
☒ CME-55	☐ 6" CONTINUOUS FLIGHT AUGER	
☐ CME-550	☒ 8" HOLLOW AUGERS	CORE SIZE:
☐ VANE SHEAR TEST	☐ HARD FACED FINGER BITS	☐ -B ☐ -H
☐ PORTABLE HOIST	☐ TUNG-CARBIDE INSERTS	☐ -N
☐	☒ CASING ☒ W/ ADVANCER	HAND TOOLS:
☐	☐ TRICONE * STEEL TEETH	☐ POST HOLE DIGGER
☐	☐ TRICONE * TUNG.-CARB.	☐ HAND AUGER
☐	☐ CORE BIT	☐ SOUNDING ROD
		☐ VANE SHEAR TEST


**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS (PAGE 2 OF 2)

ROCK DESCRIPTION			TERMS AND DEFINITIONS		
HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:			ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTILING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.		
WEATHERED ROCK (WR)		NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.			
CRYSTALLINE ROCK (CR)		FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.			
NON-CRYSTALLINE ROCK (NCR)		FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.			
COASTAL PLAIN SEDIMENTARY ROCK (CP)		COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.			
WEATHERING					
FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.				
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.				
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.				
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.				
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>				
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</u>				
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</u>				
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.				
ROCK HARDNESS					
VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.				
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.				
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.				
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PEICES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.				
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.				
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.				
FRACTURE SPACING			BEDDING		
TERM	SPACING		TERM	THICKNESS	
VERY WIDE	MORE THAN 10 FEET		VERY THICKLY BEDDED	4 FEET	
WIDE	3 TO 10 FEET		THICKLY BEDDED	1.5 - 4 FEET	
MODERATELY CLOSE	1 TO 3 FEET		THINLY BEDDED	0.16 - 1.5 FEET	
CLOSE	0.16 TO 1 FOOT		VERY THINLY BEDDED	0.03 - 0.16 FEET	
VERY CLOSE	LESS THAN 0.16 FEET		THICKLY LAMINATED	0.008 - 0.03 FEET	
			THINLY LAMINATED	< 0.008 FEET	
INDURATION					
FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.					
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.				
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.				
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.				
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.				
BENCH MARK: TBM GEU-IAT 10+01 (ASSUMED STATIONING) 12 FEET LEFT OF EXISTING CENTERLINE ON SOUTHWEST CORNER OF THE BRIDGE DECK ELEVATION: 100.0* FEET					
NOTES: ELEVATION OF TEMPORARY BENCHMARK (GEU-I) IS ASSUMED BR 014 TOP OF RAIL AT EBI STATION 10+01, 14 FT. RT.; ELEVATION 102.4 BR 014 TOP OF RAIL AT EB2 STATION 10+53, 14 FT. RT.; ELEVATION 102.3 BR 015 TOP OF RAIL AT EBI STATION 11+43, 14 FT. RT.; ELEVATION 102.1 BR 015 TOP OF RAIL AT EB2 STATION 11+94, 14 FT. RT.; ELEVATION 102.0					
DATE: 8-15-14					

PROJECT REFERENCE NO.	SHEET NO.
B-5657	3
SITE PLAN	
0 50 100  FEET	

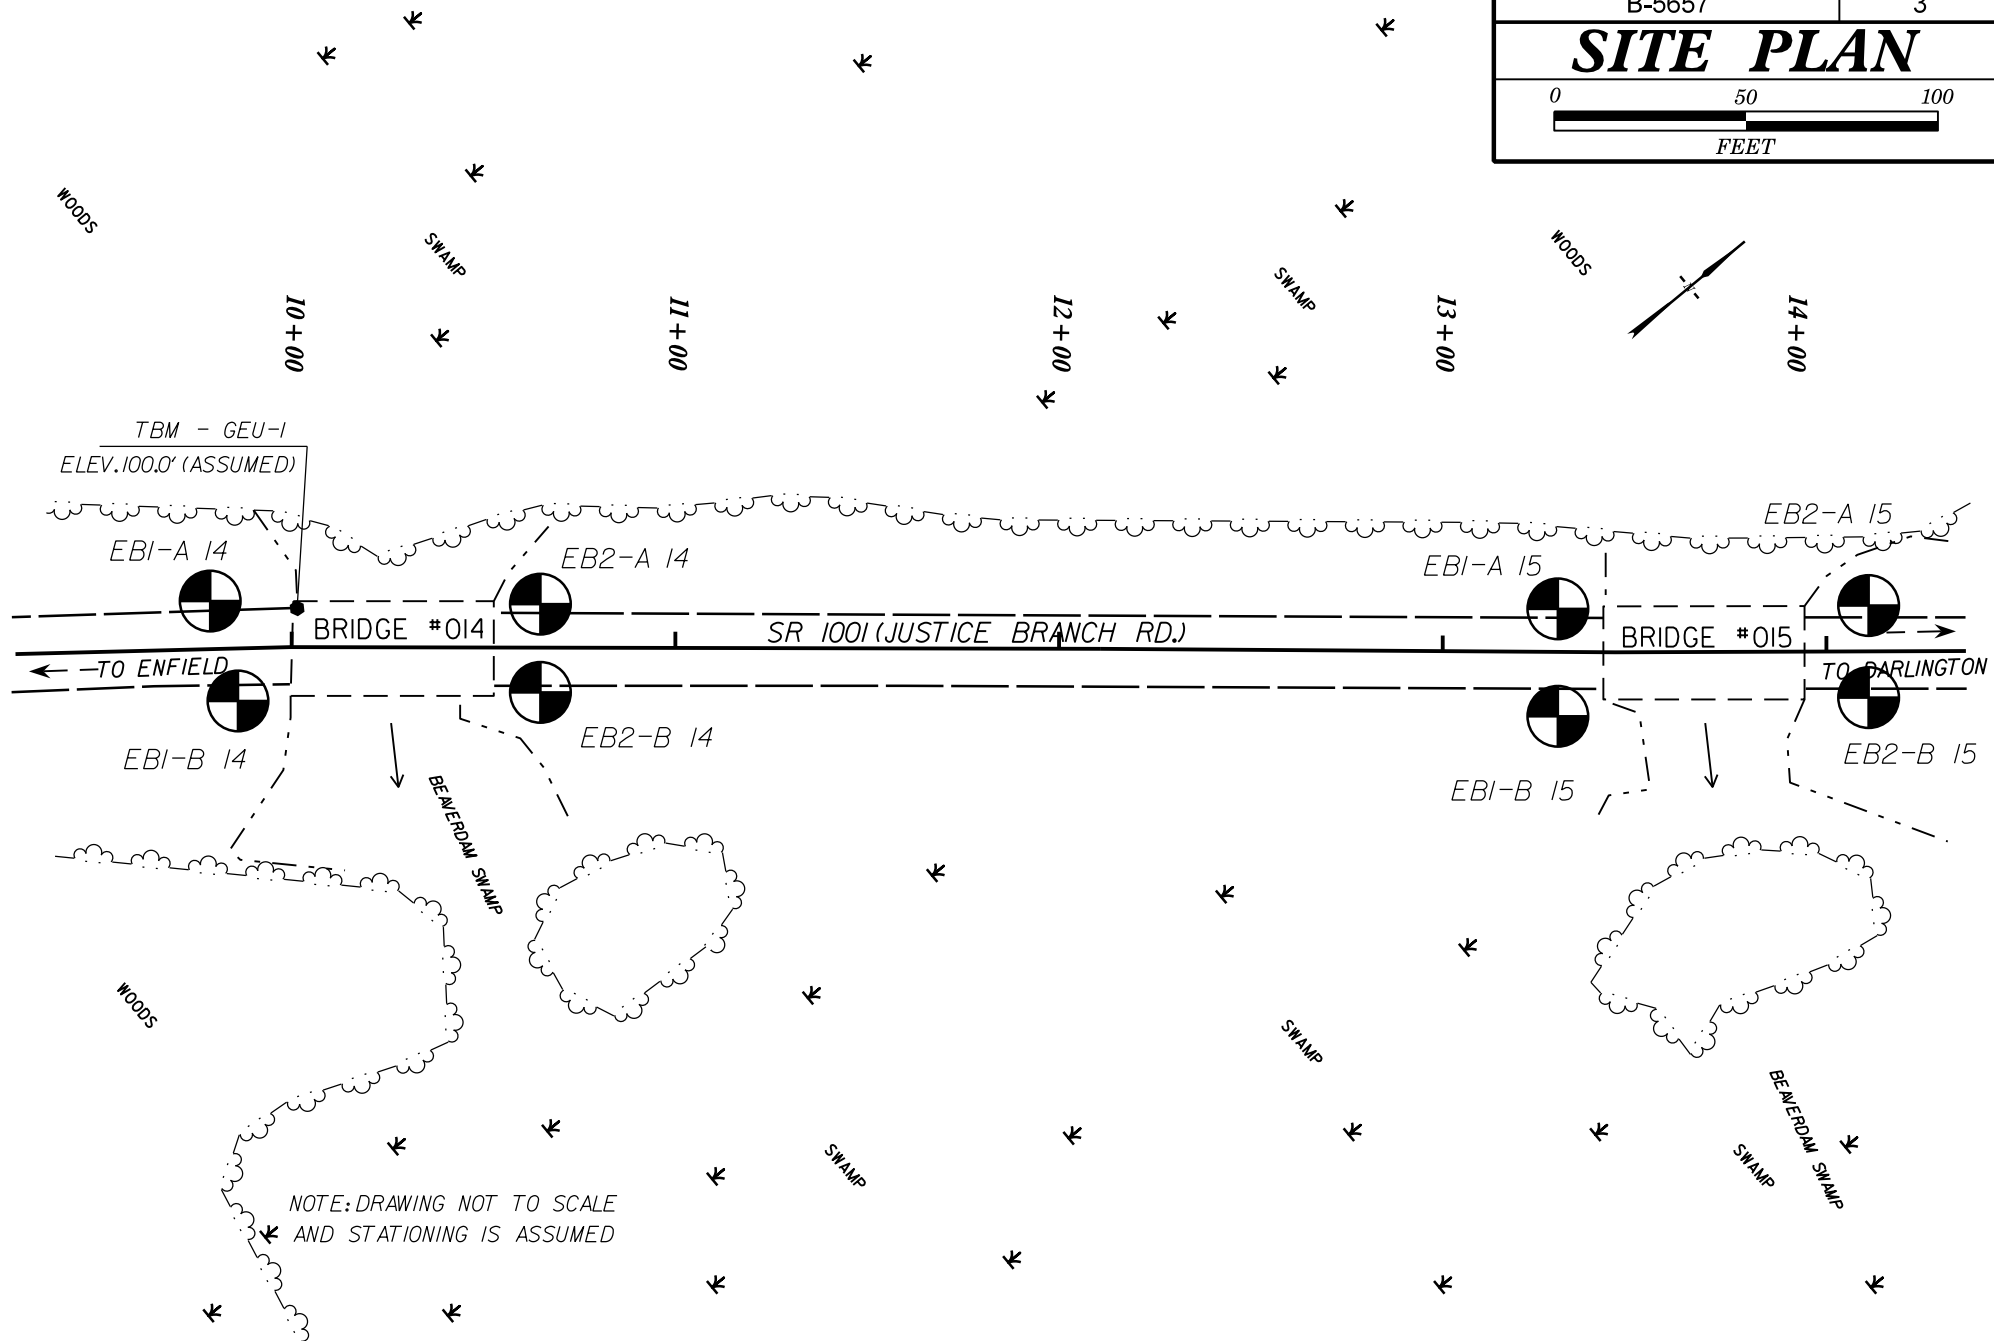

[illegible]

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 6

WBS 45612.1.1			TIP B-5657			COUNTY HALIFAX			GEOLOGIST Oti, O. B.		
SITE DESCRIPTION BRIDGE NO 14 AND 15 ON SR 1001 (JUSTICE BRANCH RD.) OVER BEAVERDAM SWAMP									GROUND WTR (ft)		
BORING NO. EB2-A 14			STATION 10+63			OFFSET 11 ft LT			ALIGNMENT EL		
COLLAR ELEV. 99.8 ft			TOTAL DEPTH 48.0 ft			NORTHING 899,594			EASTING 2,391,298		
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 89% 02/09/2015						DRILL METHOD NW Casing w/ Advancer			HAMMER TYPE Automatic		
DRILLER Pinter, D. G.			START DATE 03/03/16			COMP. DATE 03/03/16			SURFACE WATER DEPTH N/A		

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
100															99.8	GROUND SURFACE
95	95.8	4.0	WOH	WOH	WOH								M		92.8	ROADWAY EMBANKMENT TAN BROWN, SILTY SAND
90	90.8	9.0	1	3	2								M			ALLUVIAL DARK GRAY, SILTY CLAY
85	85.8	14.0	2	2	2								W			
80	80.8	19.0	2	2	3								W		81.8	COASTAL PLAIN DARK GRAY, SANDY CLAY
75	75.8	24.0	7	11	13								W			
70	70.8	29.0	8	9	13								W			
65	65.8	34.0	6	7	9								W			
60	60.8	39.0	5	11	15								W		59.3	RESIDUAL LIGHT GRAY, SANDY SILT
55	55.8	44.0	8	15	23								W			
	51.8	48.0													52.3	WEATHERED ROCK (META-GRANITE)
															51.8	(META-DIORITE)

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 7

WBS 45612.1.1			TIP B-5657			COUNTY HALIFAX			GEOLOGIST Oti, O. B.					
SITE DESCRIPTION BRIDGE NO 14 AND 15 ON SR 1001 (JUSTICE BRANCH RD.) OVER BEAVERDAM SWAMP									GROUND WTR (ft)					
BORING NO. EB2-B 14			STATION 10+63			OFFSET 12 ft RT			ALIGNMENT EL			0 HR. N/A		
COLLAR ELEV. 99.5 ft			TOTAL DEPTH 50.0 ft			NORTHING 899,657			EASTING 2,391,349			24 HR. N/A		
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 89% 02/09/2015						DRILL METHOD NW Casing w/ Advancer			HAMMER TYPE Automatic					
DRILLER Pinter, D. G.			START DATE 03/07/16			COMP. DATE 03/07/16			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)
100													99.5	0.0
95	95.8	3.7	WOH	WOH	WOH							M		
90	90.8	8.7	2	2	3							M		
85	85.8	13.7	2	1	2							W		
80	80.8	18.7	1	2	3							W		
75	75.8	23.7	4	6	8							W		
70	70.8	28.7	6	12	16							W		
65	65.8	33.7	3	6	8							W		
60	60.8	38.7	6	12	17							M		
55	55.8	43.7	25	42	58/4									
50	50.8	48.7	100/2											
	49.5	50.0	60/0.0											

NCDOT BORE SINGLE B5657 GEO BR0014_0015.GPJ NC_DOT.GDT 5/3/16

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 9

WBS 45612.1.1			TIP B-5657			COUNTY HALIFAX			GEOLOGIST Oti, O. B.					
SITE DESCRIPTION BRIDGE NO 14 AND 15 ON SR 1001 (JUSTICE BRANCH RD.) OVER BEAVERDAM SWAMP									GROUND WTR (ft)					
BORING NO. EB1-B 15			STATION 13+30			OFFSET 17 ft RT			ALIGNMENT EL			0 HR. N/A		
COLLAR ELEV. 98.9 ft			TOTAL DEPTH 30.1 ft			NORTHING 899,376			EASTING 2,391,146			24 HR. 5.0		
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 89% 02/09/2015						DRILL METHOD NW Casing w/ Advancer			HAMMER TYPE Automatic					
DRILLER Pinter, D. G.			START DATE 03/01/16			COMP. DATE 03/01/16			SURFACE WATER DEPTH N/A					
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)
100														
													98.9	0.0
													GROUND SURFACE	
													ROADWAY EMBANKMENT	
													TAN BROWN, SILTY SAND	
95	95.9	3.0	1	1	3									
90	90.9	8.0	1	1	1								90.9	8.0
													ALLUVIAL	
													LIGHT GRAY, SILTY SAND	
85	85.9	13.0	4	7	4									
80	80.9	18.0	1	1	2								83.4	15.5
													COASTAL PLAIN	
													DARK GRAY, SANDY CLAY	
75	75.9	23.0	6	12	15								76.9	22.0
													RESIDUAL	
													LIGHT GRAY, SANDY CLAY	
70	70.9	28.0											72.4	26.5
													WEATHERED ROCK	
													(META-DIORITE)	
	68.8	30.1											68.8	30.1
													Boring Terminated with Standard	
													Penetration Test Refusal at Elevation 68.8	
													ft ON CRYSTALLINE ROCK	
													(META-DIORITE)	

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 10

WBS 45612.1.1			TIP B-5657			COUNTY HALIFAX			GEOLOGIST Oti, O. B.		
SITE DESCRIPTION BRIDGE NO 14 AND 15 ON SR 1001 (JUSTICE BRANCH RD.) OVER BEAVERDAM SWAMP									GROUND WTR (ft)		
BORING NO. EB2-A 15			STATION 14+11			OFFSET 12 ft LT			ALIGNMENT EL		
COLLAR ELEV. 99.7 ft			TOTAL DEPTH 34.0 ft			NORTHING 899,577			EASTING 2,391,319		
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 89% 02/09/2015						DRILL METHOD NW Casing w/ Advancer			HAMMER TYPE Automatic		
DRILLER Pinter, D. G.			START DATE 03/02/16			COMP. DATE 03/02/16			SURFACE WATER DEPTH N/A		

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
100														GROUND SURFACE	0.0
95	95.7	4.0	1	2	2									ROADWAY EMBANKMENT TAN GRAY, SILTY SAND	
90	90.7	9.0	3	3	5									ALLUVIAL TAN BROWN, SILTY SAND	8.0
85	85.7	14.0	3	4	3									COASTAL PLAIN LIGHT GRAY, SANDY CLAY	15.5
80	80.7	19.0	2	4	8										
75	75.7	24.0	6	12	15										
70	70.7	29.0	9	23	42									RESIDUAL LIGHT GRAY, SANDY CLAY	29.5
	65.7	34.0												Boring Terminated with Standard Penetration Test Refusal at Elevation 65.7 ft ON CRYSTALLINE ROCK (META-DIORITE)	34.0

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 11

WBS 45612.1.1			TIP B-5657			COUNTY HALIFAX			GEOLOGIST Oti, O. B.					
SITE DESCRIPTION BRIDGE NO 14 AND 15 ON SR 1001 (JUSTICE BRANCH RD.) OVER BEAVERDAM SWAMP									GROUND WTR (ft)					
BORING NO. EB2-B 15			STATION 14+11			OFFSET 12 ft RT			ALIGNMENT EL					
COLLAR ELEV. 99.1 ft			TOTAL DEPTH 33.7 ft			NORTHING 899,642			EASTING 2,391,367					
DRILL RIG/HAMMER EFF./DATE RFO0074 CME-55 89% 02/09/2015									DRILL METHOD NW Casing w/ Advancer			HAMMER TYPE Automatic		
DRILLER Pinter, D. G.			START DATE 03/02/16			COMP. DATE 03/02/16			SURFACE WATER DEPTH N/A					

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
100																
														99.1	GROUND SURFACE	0.0
															ROADWAY EMBANKMENT TAN BROWN, SILTY SAND	
95	95.1	4.0	1	1	2									92.1		7.0
															ALLUVIAL LIGHT GRAY, SILTY SAND	
90	90.1	9.0	6	7	8											
85	85.1	14.0	6	6	3											
80	80.1	19.0	4	3	4											
75	75.1	24.0	7	14	22											
70	70.1	29.0	12	30	70/3											
	65.4	33.7												69.6		29.5
														69.1		30.0
															RESIDUAL LIGHT GRAY, SANDY CLAY	
															WEATHERED ROCK (META-DIORITE)	
														65.4		33.7
															Boring Terminated with Standard Penetration Test Refusal at Elevation 65.4 ft ON CRYSTALLINE ROCK (META-DIORITE)	