

REFERENCE: SF-020142

PROJECT: 17BP.11.R.133

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	17BP.11.R.133	1	11

STATE OF NORTH CAROLINA

DEPARTMENT OF TRANSPORTATION

DIVISION OF HIGHWAYS

GEOTECHNICAL ENGINEERING UNIT

STRUCTURE

SUBSURFACE INVESTIGATION

COUNTY ALLEGHANY

PROJECT DESCRIPTION REPLACE BRIDGE NO.142
ON SR 1319 OVER POTATO CREEK

SITE DESCRIPTION _____

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2-2C	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-II	BORE AND CORE LOGS WITH CORE PHOTOGRAPHS

PERSONNEL

S. Abernathy

M. Morgan

INVESTIGATED BY K. Bussey

DRAWN BY W. Shuecraft

CHECKED BY T. Stivers

SUBMITTED BY K. Bussey

DATE 12/29/2016

JK

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF PREPARING THE SCOPE OF WORK TO BE INCLUDED IN THE REQUEST FOR PROPOSAL. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N.C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

SOIL AND ROCK BOUNDARIES WITHIN A BOREHOLE ARE BASED ON GEOTECHNICAL INTERPRETATION UNLESS ENCOUNTERED IN A SAMPLE. INTERPRETED BOUNDARIES MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN SAMPLED STRATA AND BOREHOLE INFORMATION MAY NOT NECESSARILY REFLECT ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

NOTES:

- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N.C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
- BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.



DocuSigned by:

Kenneth R. Bussey, Jr. 12/3/2017

22A188C7B3D442E

DATE

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

17BP.11.R.133

2

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS (PAGE 1 OF 2)

SOIL DESCRIPTION

SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6

SOIL LEGEND AND AASHTO CLASSIFICATION

GENERAL CLASS.	GRANULAR MATERIALS ($\leq 35\%$ PASSING #200)							SILT-CLAY MATERIALS ($> 35\%$ PASSING #200)				ORGANIC MATERIALS		
GROUP CLASS.	A-1		A-3		A-2			A-4	A-5	A-6	A-7	A-1, A-2 A-3	A-4, A-5 A-6, A-7	
SYMBOL														
% PASSING #10 #40 #200	50 MX 30 MX 15 MX	50 MX 25 MX	51 MN 10 MX	35 MX	35 MX	35 MX	35 MX	36 MN	36 MN	36 MN	36 MN	GRANULAR SOILS	SILT- CLAY SOILS	MUCK, PEAT
MATERIAL PASSING #40 LL PI	— 6 MX		— NP	40 MX 10 MX	41 MN 10 MX	40 MX 11 MN	41 MN 11 MN	40 MX 10 MX	41 MN 10 MX	40 MX 11 MN	41 MN 11 MN	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER		HIGHLY ORGANIC SOILS
GROUP INDEX	0		0	0			4 MX	8 MX	12 MX	16 MX	NO MX			
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS, GRAVEL, AND SAND		FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND			SILTY SOILS		CLAYEY SOILS					
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD							FAIR TO POOR				FAIR TO POOR	POOR	UNSATISFACTORY

PI OF A-7-5 SUBGROUP IS $\leq$ LL - 30; PI OF A-7-6 SUBGROUP IS $>$ LL - 30

CONSISTENCY OR DENSENESS

PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4

TEXTURE OR GRAIN SIZE

U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270
	4.76	2.00	0.42	0.25	0.075	0.053
BOULDER (BLDR.)						
COBBLE (COB.)						
GRAVEL (GR.)						
COARSE SAND (CSE, SD.)						
FINE SAND (F SD.)						
SILT (SL.)						
CLAY (CL.)						

GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005
IN.	12	3					

SOIL MOISTURE - CORRELATION OF TERMS

SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION
LL — LIQUID LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE
PLASTIC RANGE (PI) — PL — PLASTIC LIMIT	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE
OM — OPTIMUM MOISTURE SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE
SL — SHRINKAGE LIMIT	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE

PLASTICITY

	PLASTICITY INDEX (PI)	DRY STRENGTH
NON PLASTIC	0-5	VERY LOW
SLIGHTLY PLASTIC	6-15	SLIGHT
MODERATELY PLASTIC	16-25	MEDIUM
HIGHLY PLASTIC	26 OR MORE	HIGH

COLOR

DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.

GRADATION

WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE.
UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE.
GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.

ANGULARITY OF GRAINS

THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.

MINERALOGICAL COMPOSITION

MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.

COMPRESSIBILITY

SLIGHTLY COMPRESSIBLE LL $<$ 31
MODERATELY COMPRESSIBLE LL = 31 - 50
HIGHLY COMPRESSIBLE LL $>$ 50

PERCENTAGE OF MATERIAL

ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%
HIGHLY ORGANIC	$>$ 10%	$>$ 20%	HIGHLY 35% AND ABOVE

GROUND WATER

WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING
 STATIC WATER LEVEL AFTER 24 HOURS
 PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA
 SPRING OR SEEP

MISCELLANEOUS SYMBOLS

	ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION		DIP & DIP DIRECTION OF ROCK STRUCTURES
	SOIL SYMBOL		TEST BORING
	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT		AUGER BORING
	INFERRED SOIL BOUNDARY		CORE BORING
	INFERRED ROCK LINE		MONITORING WELL
	ALLUVIAL SOIL BOUNDARY		PIEZOMETER INSTALLATION
			SLOPE INDICATOR INSTALLATION
			CONE PENETROMETER TEST
			SOUNDING ROD
			TEST BORING WITH CORE
			SPT N-VALUE

RECOMMENDATION SYMBOLS

	UNDERCUT		UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE		UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL
	SHALLOW UNDERCUT		UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK		

ABBREVIATIONS

AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST
BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED
CL - CLAY	MOD. - MODERATELY	γ - UNIT WEIGHT
CPT - CONE PENETRATION TEST	NP - NON PLASTIC	γ _d - DRY UNIT WEIGHT
CSE. - COARSE	ORG. - ORGANIC	
DMT - DILATOMETER TEST	PMT - PRESSUREMETER TEST	SAMPLE ABBREVIATIONS
DPT - DYNAMIC PENETRATION TEST	SAP. - SAPROLITIC	S - BULK
ea - VOID RATIO	SD. - SAND, SANDY	SS - SPLIT SPOON
F - FINE	SL. - SILT, SILTY	ST - SHELBY TUBE
FOSS. - FOSSILIFEROUS	SLL. - SLIGHTLY	RS - ROCK
FRAC. - FRACTURED, FRACTURES	TCR - TRICONE REFUSAL	RT - RECOMPACTED TRIAXIAL
FRAGS. - FRAGMENTS	w - MOISTURE CONTENT	CBR - CALIFORNIA BEARING RATIO
HL. - HIGHLY	V - VERY	

EQUIPMENT USED ON SUBJECT PROJECT

DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:
☒ CME-45C	☐ CLAY BITS	☒ AUTOMATIC ☐ MANUAL
☐ CME-55	☐ 6" CONTINUOUS FLIGHT AUGER	
☐ CME-550	☐ 8" HOLLOW AUGERS	
☐ VANE SHEAR TEST	☐ HARD FACED FINGER BITS	
☐ PORTABLE HOIST	☐ TUNG-CARBIDE INSERTS	
☐	☒ CASING ☒ W/ ADVANCER	
☐	☐ TRICONE _____ * STEEL TEETH	
☐	☐ TRICONE _____ * TUNG.-CARB.	
☐	☒ CORE BIT	
☐		
		CORE SIZE:
		☐ -B ☐ -H
		☒ -N Q2
		HAND TOOLS:
		☐ POST HOLE DIGGER
		☐ HAND AUGER
		☐ SOUNDING ROD
		☐ VANE SHEAR TEST
		☐

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS (PAGE 2 OF 2)

ROCK DESCRIPTION

HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED. AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:

WEATHERED ROCK (WR)		NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.
CRYSTALLINE ROCK (CR)		FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.
NON-CRYSTALLINE ROCK (NCR)		FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.
COASTAL PLAIN SEDIMENTARY ROCK (CP)		COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.

WEATHERING

FRESH	ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.
VERY SLIGHT (V SL.)	ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.
SLIGHT (SL.)	ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.
MODERATE (MOD.)	SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.
MODERATELY SEVERE (MOD. SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <u>IF TESTED, WOULD YIELD SPT REFUSAL</u>
SEVERE (SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</u>
VERY SEVERE (V SEV.)	ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <u>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</u>
COMPLETE	ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.

ROCK HARDNESS

VERY HARD	CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.
HARD	CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.
MODERATELY HARD	CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.
MEDIUM HARD	CAN BE GROOVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.
SOFT	CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.
VERY SOFT	CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGERNAIL.

FRACTURE SPACING

BEDDING

TERM	SPACING	TERM	THICKNESS
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET
		THINLY LAMINATED	< 0.008 FEET

INDURATION

FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.

FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.

TERMS AND DEFINITIONS

ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER.
AQUIFER - A WATER BEARING FORMATION OR STRATA.
ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND.
ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC.
ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE.
CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE.
COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE.
CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK.
DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL.
DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH.
FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE.
FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES.
FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL.
FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM.
FORMATION (FM.) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD.
JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED.
LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT.
LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS.
MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTILING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE.
PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM.
RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK.
ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE.
SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK.
SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS.
SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE.
STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS.
STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE.
STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE.
TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.

BENCH MARK: Temporary Benchmark on top of telephone utility box on Piney Post Office Road.
Northing 1026880.909, Easting 1334899.692 ELEVATION: 100.00 FEET

NOTES:

Benchmark elevation assumed

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SUPPLEMENTAL LEGEND, GEOLOGICAL STRENGTH INDEX (GSI) TABLES FROM AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS (PAGE 1 OF 2)

AASHTO LRFD Figure 10.4.6.4-1 — Determination of GSI for Jointed Rock Mass (Marinos and Hoek, 2000)

GEOLOGICAL STRENGTH INDEX (GSI) FOR JOINTED ROCKS (Hoek and Marinos, 2000)

From the lithology, structure and surface conditions of the discontinuities, estimate the average value of GSI. Do not try to be too precise. Quoting a range from 33 to 37 is more realistic than stating that GSI = 35. Note that the table does not apply to structurally controlled failures. Where weak planar structural planes are present in an unfavorable orientation with respect to the excavation face, these will dominate the rock mass behaviour. The shear strength of surfaces in rocks that are prone to deterioration as a result of changes in moisture content will be reduced if water is present. When working with rocks in the fair to very poor categories, a shift to the right may be made for wet conditions. Water pressure is dealt with by effective stress analysis.

SURFACE CONDITIONS

VERY GOOD
Very rough, fresh unweathered surfaces

GOOD
Rough, slightly weathered, iron stained surfaces


FAIR
Smooth, moderately weathered and altered surfaces

POOR
Slickensided, highly weathered surfaces with compact coatings or fillings or angular fragments


VERY POOR
Slickensided, highly weathered surfaces with soft clay coatings or fillings

STRUCTURE


DECREASING SURFACE QUALITY →




INTACT OR MASSIVE - intact rock specimens or massive in situ rock with few widely spaced discontinuities




BLOCKY - well interlocked undisturbed rock mass consisting of cubical blocks formed by three intersecting discontinuity sets




VERY BLOCKY - interlocked, partially disturbed mass with multi-faceted angular blocks formed by 4 or more joint sets



BLOCKY/DISTURBED/SEAMY - folded with angular blocks formed by many intersecting discontinuity sets. Persistence of bedding planes or schistosity




DISINTEGRATED - poorly interlocked, heavily broken rock mass with mixture of angular and rounded rock pieces



LAMINATED/SHEARED - Lack of blockiness due to close spacing of weak schistosity or shear planes

DECREASING INTERLOCKING OF ROCK PIECES
↓

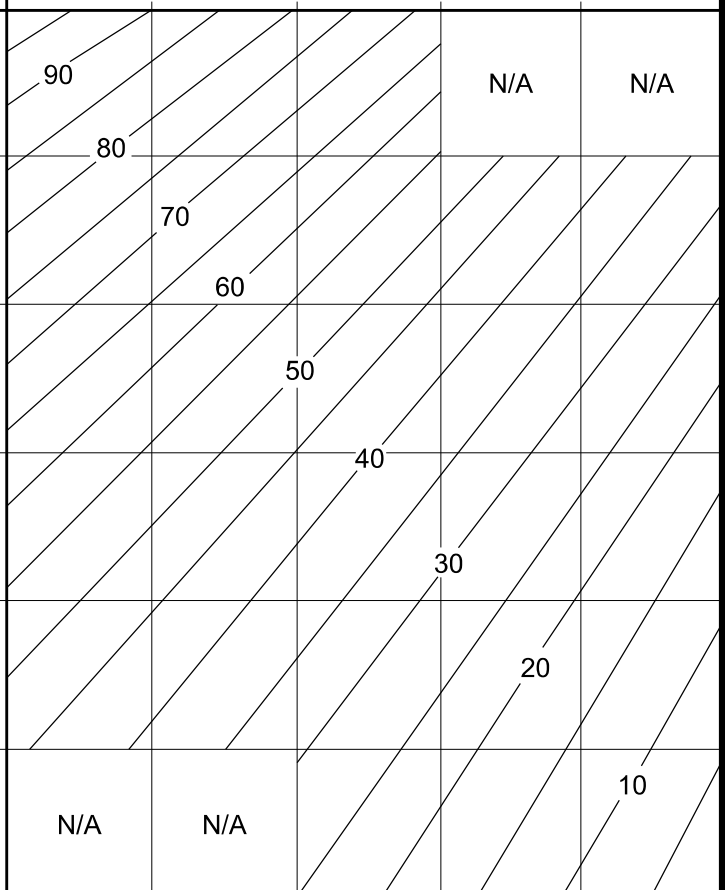

17BP.11.R.133

2C

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SUPPLEMENTAL LEGEND, GEOLOGICAL STRENGTH INDEX (GSI) TABLES FROM AASHTO LRFD BRIDGE DESIGN SPECIFICATIONS (PAGE 2 OF 2)

AASHTO LRFD Figure 10.4.6.4-2 — Determination of GSI for Tectonically Deformed Heterogeneous Rock Masses (Marinos and Hoek, 2000)

GSI FOR HETEROGENEOUS ROCK MASSES SUCH
AS FLYSCH (Marinos, P and Hoek E., 2000)

From a description of the lithology, structure and surface conditions (particularly of the bedding planes), choose a box in the chart. Locate the position in the box that corresponds to the condition of the discontinuities and estimate the average value of GSI from the contours. Do not attempt to be too precise. Quoting a range from 33 to 37 is more realistic than giving GSI = 35. Note that the Hoek-Brown criterion does not apply to structurally controlled failures. Where unfavourably oriented continuous weak planar discontinuities are present, these will dominate the behaviour of the rock mass. The strength of some rock masses is reduced by the presence of groundwater and this can be allowed for by a slight shift to the right in the columns for fair, poor and very poor conditions. Water pressure does not change the value of GSI and it is dealt with by using effective stress analysis.

SURFACE CONDITIONS OF
DISCONTINUITIES
(Predominantly bedding planes)

VERY GOOD - Very Rough, fresh
unweathered surfaces


GOOD - Rough, slightly weathered
surfaces

FAIR - Smooth, moderately
weathered and altered surfaces


POOR - Very smooth, occasionally
slickensided surfaces with compact
coatings or fillings with angular
fragments

VERY POOR - Very smooth, slicken-
sided or highly weathered surfaces
with soft clay coatings or fillings


COMPOSITION AND STRUCTURE



A. Thick bedded, very blocky sandstone
The effect of pelitic coatings on the bedding
planes is minimized by the confinement of
the rock mass. In shallow tunnels or slopes
these bedding planes may cause structurally
controlled instability.




B. Sand-
stone with
thin inter-
layers of
siltstone



C. Sand-
stone and
siltstone
in similar
amounts



D. Siltstone
or silty shale
with sand-
stone layers



E. Weak
siltstone
or clayey
shale with
sandstone
layers

C, D, E, and G - may be more or
less folded than illustrated but
this does not change the strength.
Tectonic deformation, faulting and
loss of continuity moves these
categories to **F** and **H**.



F. Tectonically deformed,
intensively folded/faulted,
sheared clayey shale or siltstone
with broken and deformed
sandstone layers forming an
almost chaotic structure



G. Undisturbed silty
or clayey shale with
or without a few very
thin sandstone layers



H. Tectonically deformed silty
or clayey shale forming a
chaotic structure with pockets
of clay. Thin layers of
sandstone are transformed
into small rock pieces.

➡ Means deformation after tectonic disturbance

17BP.11.R.133

3/11



TEMP. BM
ELEV.=100.00'



B-3



B-2



B-4



B-1

0 50 100
FEET

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 4

WBS 17BP.11.R.133			TIP SF-020142			COUNTY ALLEGHANY			GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek									GROUND WTR (ft)			
BORING NO. B-1			STATION N/A			OFFSET N/A			ALIGNMENT -L-			
COLLAR ELEV. 94.4 ft			TOTAL DEPTH 14.0 ft			NORTHING 1,026,861			EASTING 1,334,964			
									0 HR. N/A		24 HR. N/A	
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015						DRILL METHOD NW Casing W/SPT & Core			HAMMER TYPE Automatic			
DRILLER Morgan, M.			START DATE 12/20/16			COMP. DATE 12/20/16			SURFACE WATER DEPTH N/A			

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
95															
90	89.4	5.0	1	5	11										94.4 GROUND SURFACE 0.0 ALLUVIAL Gray-black, very stiff, non-plastic, sandy SILT with little gravel (A-4).
85	85.5	8.9	60/0.1												87.1 85.5 WEATHERED ROCK Mica Schist (Inferred from drill penetration rate) CRYSTALLINE ROCK Mica Schist CRYSTALLINE ROCK Mica Schist 80.4 Boring Terminated at Elevation 80.4 ft in Crystalline Rock (Mica Schist).

GEOTECHNICAL BORING REPORT

CORE LOG

SHEET 5


WBS 17BP.11.R.133				TIP SF-020142		COUNTY ALLEGHANY				GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek										GROUND WTR (ft)			
BORING NO. B-1				STATION N/A			OFFSET N/A			ALIGNMENT -L-			
COLLAR ELEV. 94.4 ft				TOTAL DEPTH 14.0 ft			NORTHING 1,026,861			EASTING 1,334,964			
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015				DRILL METHOD NW Casing W/SPT & Core				HAMMER TYPE Automatic					
DRILLER Morgan, M.				START DATE 12/20/16			COMP. DATE 12/20/16			SURFACE WATER DEPTH N/A			
CORE SIZE NQ2				TOTAL RUN 5.0 ft									
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		L O G	DESCRIPTION AND REMARKS	DEPTH (ft)	
					REC. (ft) %	RQD (ft) %		REC. (ft) %	RQD (ft) %				
85.4													
85.4	85.4	9.0	5.0	2:02 1:27 1:24 3:08 3:33	(4.9) 98%	(2.0) 40%		(4.9) 98%	(2.0) 40%		Begin Coring @ 9.0 ft	9.0	
	80.4	14.0									CRYSTALLINE ROCK Gray and white tint, brown-orange stain, slight to moderate weathering, hard to very hard, close fracture spacing, Mica Schist with Feldspar Augen & granitic seams. 2 60° joints with iron oxide stain, wavy; 11 30°-40° joints, faint iron oxide stain on some, parallel foliation Boring Terminated at Elevation 80.4 ft in Crystalline Rock (Mica Schist).	14.0	

NCDOT CORE SINGLE SF020142_GEO_BRDG_ALLEGHANY 142.GPJ NC_DOT.GDT 12/23/16

CORE PHOTOGRAPHIC RECORD

Replace Bridge No. 142 on SR 1319 over Potato Creek

B-1
Box 1 of 1 : 5 feet



GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 7

WBS 17BP.11.R.133			TIP SF-020142			COUNTY ALLEGHANY			GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek									GROUND WTR (ft)			
BORING NO. B-2			STATION N/A			OFFSET N/A			ALIGNMENT -L-			
COLLAR ELEV. 94.3 ft			TOTAL DEPTH 14.6 ft			NORTHING 1,026,876			EASTING 1,334,973			
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015									DRILL METHOD NW Casing w/ SPT			HAMMER TYPE Automatic
DRILLER Morgan, M.			START DATE 12/20/16			COMP. DATE 12/20/16			SURFACE WATER DEPTH N/A			

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
95																
90	89.3	5.0	WOH	2	7											94.3 GROUND SURFACE 0.0 ALLUVIAL Gray-black, stiff, non-plastic, sandy SILT with little gravel (A-4).
85	84.3	10.0														
80	79.7	14.6														83.8 83.3 RESIDUAL Brown and white, stiff, non-plastic, saprolitic, micaceous, sandy SILT (A-4). 10.5 11.0 WEATHERED ROCK Mica Schist 14.6 Boring Terminated with Standard Penetration Test Refusal at Elevation 79.7 ft on Crystalline Rock (Mica Schist).

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 8

WBS 17BP.11.R.133			TIP SF-020142			COUNTY ALLEGHANY			GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek									GROUND WTR (ft)			
BORING NO. B-3			STATION N/A			OFFSET N/A			ALIGNMENT -L-			
COLLAR ELEV. 94.7 ft			TOTAL DEPTH 13.9 ft			NORTHING 1,026,895			EASTING 1,334,938			
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015									DRILL METHOD NW Casing w/ SPT			HAMMER TYPE Automatic
DRILLER Morgan, M.			START DATE 12/21/16			COMP. DATE 12/21/16			SURFACE WATER DEPTH N/A			

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
95															94.7	GROUND SURFACE 0.0
90	90.0	4.7														
85	85.0	9.7	WOH	WOH	WOH										86.5	8.2
			24	27	28										82.1	12.6
	80.9	13.8													80.9	13.8
			60/0.1												80.8	13.9

ALLUVIAL
Gray-black, very soft, slightly plastic, sandy **SILT** with abundant fine roots (A-4).

RESIDUAL
Brown, hard, non-plastic, saprolitic, micaceous **SILT** with clay (A-5).

WEATHERED ROCK
Mica Schist
(Inferred from drill penetration rate)

CRYSTALLINE ROCK
Mica Schist

Boring Terminated with Standard Penetration Test Refusal at Elevation 80.8 ft in Crystalline Rock (Mica Schist).

GEOTECHNICAL BORING REPORT

BORE LOG

SHEET 9

WBS 17BP.11.R.133				TIP SF-020142				COUNTY ALLEGHANY				GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek												GROUND WTR (ft)			
BORING NO. B-4				STATION N/A				OFFSET N/A				ALIGNMENT -L-		0 HR. N/A	
COLLAR ELEV. 95.1 ft				TOTAL DEPTH 13.6 ft				NORTHING 1,026,877				EASTING 1,334,929		24 HR. N/A	
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015								DRILL METHOD NW Casing W/SPT & Core				HAMMER TYPE Automatic			
DRILLER Morgan, M.				START DATE 12/21/16				COMP. DATE 12/21/16				SURFACE WATER DEPTH N/A			

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100				ELEV. (ft)	DEPTH (ft)	
100																
95															95.1	GROUND SURFACE 0.0
															91.6	ALLUVIAL Gray-black, sandy SILT (A-4). (Classification based on visual inspection) 3.5
90	90.5	4.6													90.5	WEATHERED ROCK Granitic Gneiss 4.6
															86.6	CRYSTALLINE ROCK Granitic Gneiss 8.5
85																CRYSTALLINE ROCK Mica Schist
															81.5	Boring Terminated at Elevation 81.5 ft in Crystalline Rock (Mica Schist). Note: Rods dropped 0.2' at 6.9' and then dropped 0.3' at 8.3'. No return after initial drop.

GEOTECHNICAL BORING REPORT

CORE LOG

SHEET 10

WBS 17BP.11.R.133				TIP SF-020142		COUNTY ALLEGHANY				GEOLOGIST Abernathy, S.			
SITE DESCRIPTION Replace Bridge No. 142 on SR 1319 over Potato Creek										GROUND WTR (ft)			
BORING NO. B-4				STATION N/A				OFFSET N/A		ALIGNMENT -L-		0 HR. N/A	
COLLAR ELEV. 95.1 ft				TOTAL DEPTH 13.6 ft				NORTHING 1,026,877		EASTING 1,334,929		24 HR. N/A	
DRILL RIG/HAMMER EFF./DATE HDR0404 CME-45C 91.5% 11/10/2015								DRILL METHOD NW Casing W/SPT & Core				HAMMER TYPE Automatic	
DRILLER Morgan, M.				START DATE 12/21/16				COMP. DATE 12/21/16		SURFACE WATER DEPTH N/A			
CORE SIZE NQ2				TOTAL RUN 9.0 ft									
ELEV (ft)	RUN ELEV (ft)	DEPTH (ft)	RUN (ft)	DRILL RATE (Min/ft)	RUN		SAMP. NO.	STRATA		L O G	DESCRIPTION AND REMARKS	DEPTH (ft)	
					REC. (ft) %	RQD (ft) %		REC. (ft) %	RQD (ft) %				
90.5													
90.5	90.5	4.6	5.0	N=60 2:57 2:31 1:33 2:19 3:32	(4.5) 90%	(3.3) 66%		(8.5) 218%	(6.8) 174%		Begin Coring @ 4.6 ft	4.6	
											CRYSTALLINE ROCK		
											Light gray and gray tint, brown-orange stain in part, slight to fresh weathering, hard, close fracture spacing, Granitic Gneiss.		
	85.5	9.6									4 50°-60° joints with iron oxide stain on some, slickensides at 6.4'; 2 30° joints with iron stain and core loss (see notes).	8.5	
85			4.0	2:46 4:42 5:15 5:30	(4.0) 100%	(3.5) 88%					CRYSTALLINE ROCK		
											Gray, white, traces black and faint brown-orange, fresh, hard to very hard, close to moderately close fracture spacing, Mica Schist with traces Hornblende.		
	81.5	13.6									5 50°-60° joints, parallel foliation.	13.6	
											Boring Terminated at Elevation 81.5 ft in Crystalline Rock (Mica Schist).		
											Note: Rods dropped 0.2' at 6.9' and then dropped 0.3' at 8.3'. No return after initial drop.		

NCDOT CORE SINGLE SF020142_GEO_BRDG_ALLEGHANY 142.GPJ NC_DOT.GDT 12/23/16

CORE PHOTOGRAPHIC RECORD

Replace Bridge No. 142 on SR 1319 over Potato Creek

B-4
Box 1 of 1 : 9 feet

