


09-FEB-2017 13:45: RA:\Roadway\Proj\B4950_Rdy_tsh.dgn

09/08/99

TIP PROJECT: B-4950

CONTRACT: C203904

See Sheet 1A For Index of Sheets
See Sheet 1B For Conventional Symbols
See Sheet 1C-1 For Survey Control Sheet

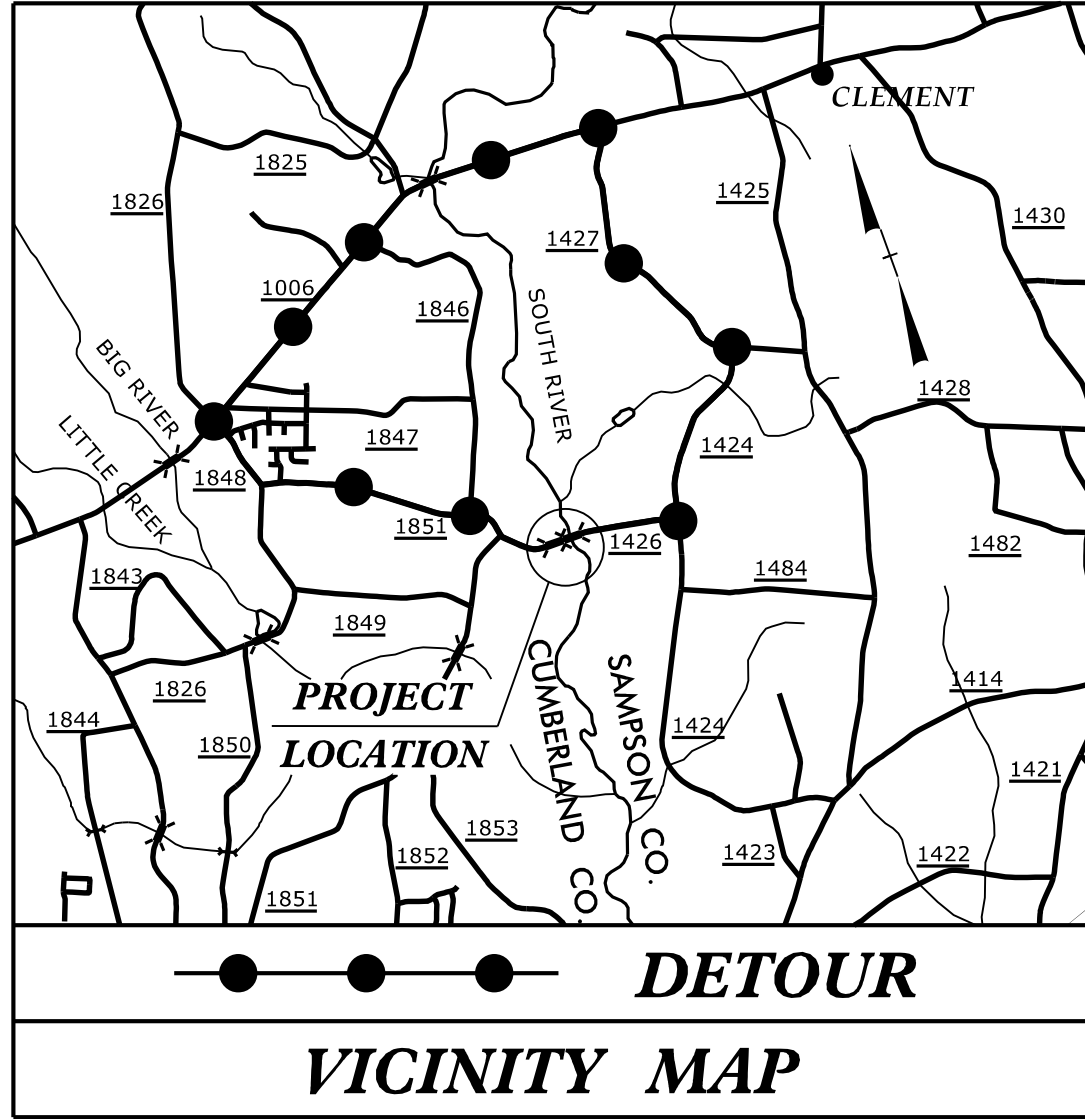



STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

CUMBERLAND AND SAMPSON COUNTIES

**LOCATION: REPLACE BRIDGES 171 AND 172 OVER
SOUTH RIVER ON SR 1851 /SR 1426
(FAIRCLOTH BRIDGE ROAD)**

TYPE OF WORK: GRADING, DRAINAGE, PAVING, AND STRUCTURES

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-4950	1	
STATE PROJ. NO.	F.A. PROJ. NO.	DESCRIPTION	
40108.1.1	BRZ-1851(3)	PE	
40108.2.1	BRZ-1851(3)	ROW, UTIL	
40108.3.1	BRZ-1851(3)	CONST	

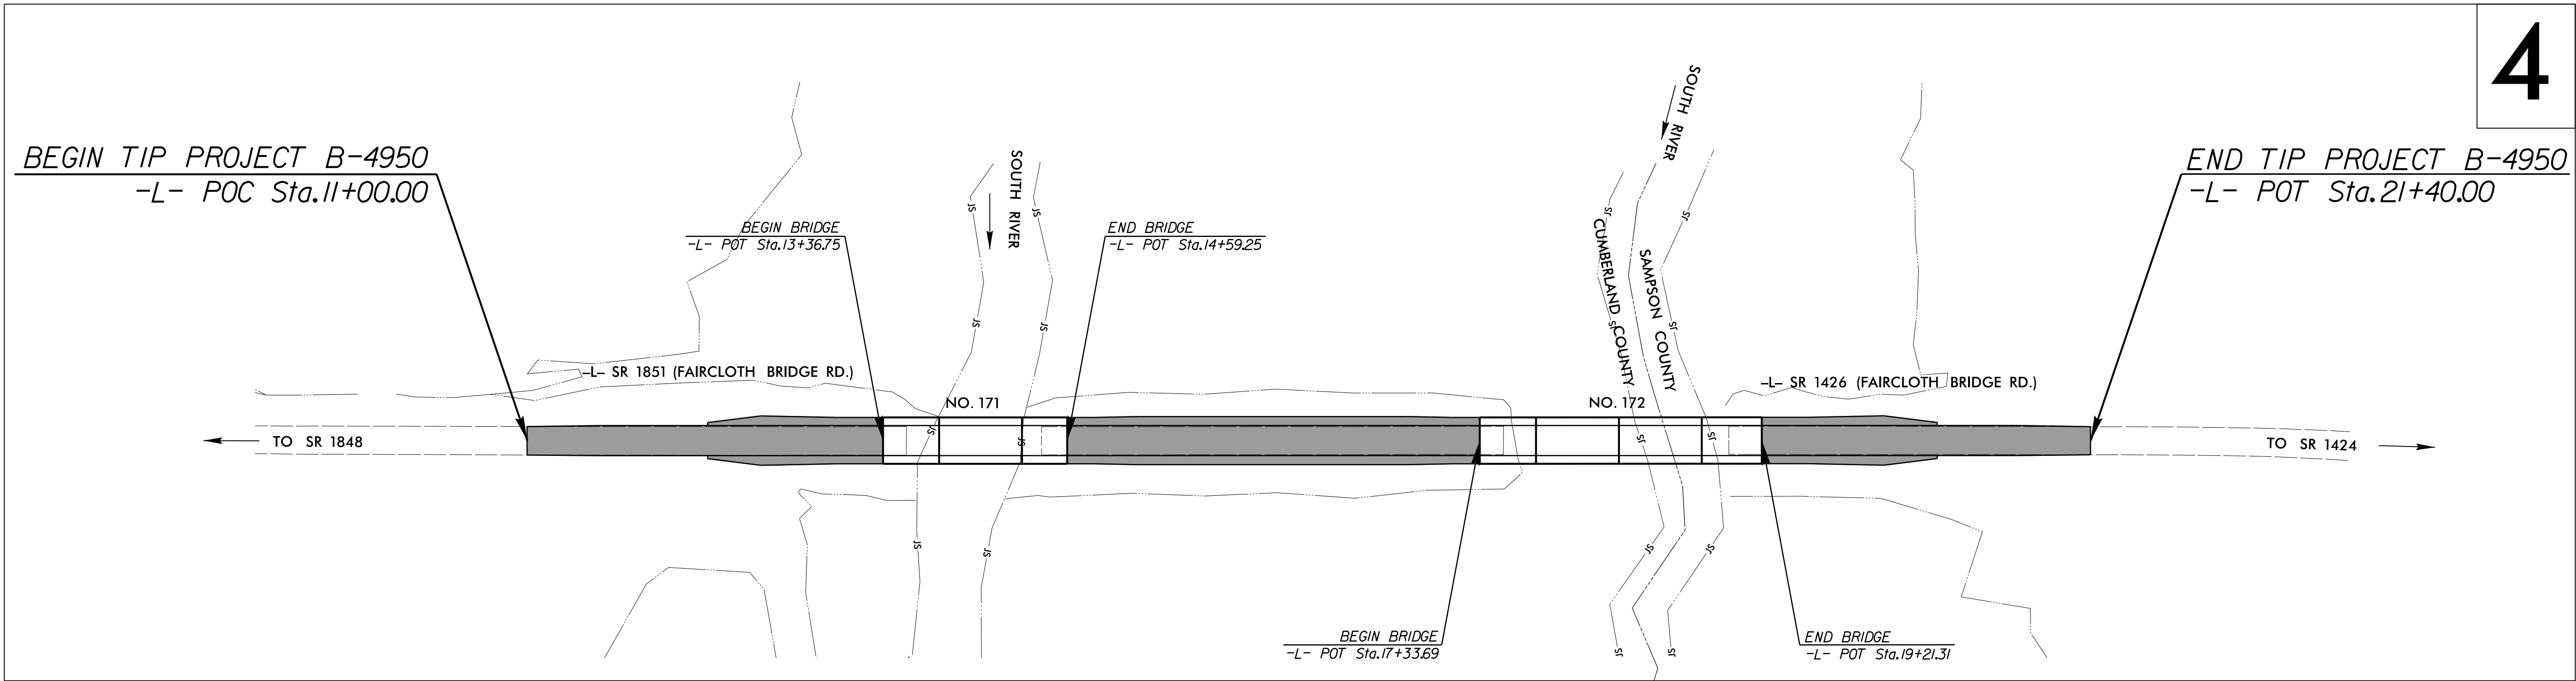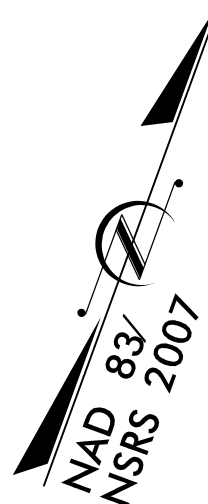


4

THERE IS NO CONTROL OF ACCESS ON THIS PROJECT.

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED

GRAPHIC SCALES

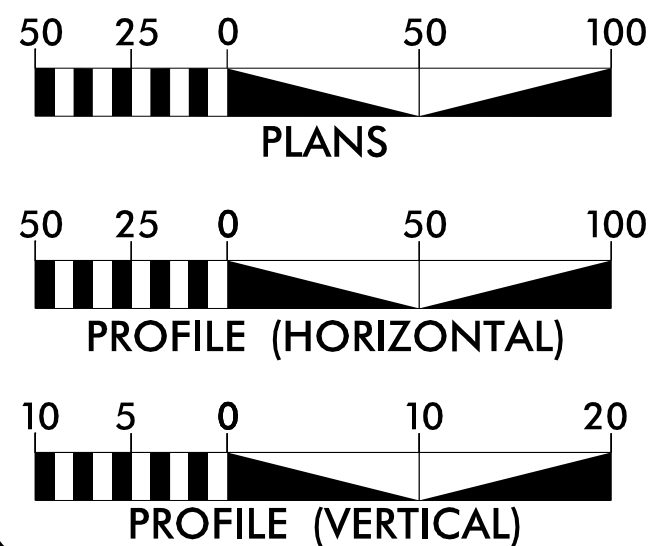

DESIGN DATA

ADT 2017 = 654
ADT 2037 = 1,038
K = 10 %
D = 60 %
T = 3 % *
V = 60 MPH
*(TTST=1% + DUAL=2%)
FUNC CLASS = LOCAL
SUB-REGIONAL TIER

PROJECT LENGTH

LENGTH ROADWAY TIP PROJECT B-4950 = 0.138 MILE
LENGTH STRUCTURES TIP PROJECT B-4950 = 0.059 MILE
TOTAL LENGTH TIP PROJECT B-4950 = 0.197 MILE

PLANS PREPARED BY:

RS&H

8601 SIX FORKS RD, SUITE 260
RALEIGH, NC 27615
919-926-4100


FOR THE NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
2012 STANDARD SPECIFICATIONS

RIGHT OF WAY DATE:
JULY 21, 2016

LETTING DATE:
MAY 16, 2017

JENNIFER FARINO, PE
PROJECT ENGINEER
JARED BOND, PE
PROJECT DESIGN ENGINEER
TATIA L. WHITE, PE, PLS
NCDOT CONTACT

HYDRAULICS ENGINEER

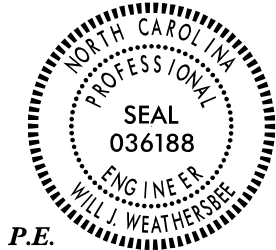

SIGNATURE:

**ROADWAY DESIGN
ENGINEER**



SIGNATURE:

