


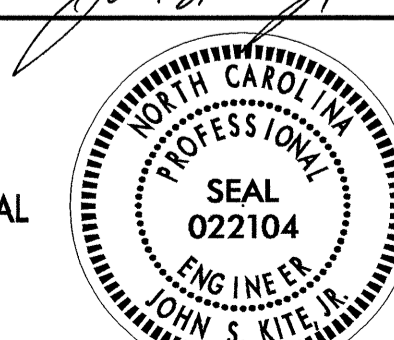
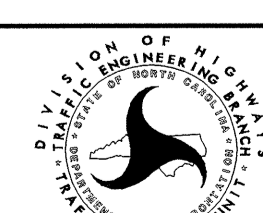


PROJ. REFERENCE NO.	SHEET NO.
R-0513BB/C	PMP-1

Pavement Marking Schedule TIP Project # R-0513BB/C

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY	
		FINAL			
PAVEMENT MARKINGS					
		THERMOPLASTIC (100MM, 2.3MM)			
TA	WHITE EDGELINE		46115	M	
TB	YELLOW EDGELINE		42506	M	
					TOTAL 88621 M
		THERMOPLASTIC (100MM, 3.1MM)			
TC	3 M. WHITE SKIP		10295	M	
TD	0.5 M. WHITE MINISKIP		454	M	
TE	WHITE SOLID LANE LINE		377	M	
TI	YELLOW DOUBLE CENTER		3960	M	
					TOTAL 15086 M
		THERMOPLASTIC (150MM, 2.3MM)			
T6	WHITE EDGELINE		16358	M	
T7	YELLOW EDGELINE		16423	M	
					TOTAL 32781 M
		THERMOPLASTIC (150MM, 3.1MM)			
TJ	3 M. WHITE SKIP		2663	M	
TK	0.5 M. WHITE MINISKIP		160	M	
					TOTAL 2823 M
		THERMOPLASTIC (200MM, 2.3MM)			
TP	WHITE GORELINE		4347	M	
					TOTAL 4347 M
		THERMOPLASTIC (300MM, 2.3MM)			
TY	WHITE GORELINE		1942	M	
					TOTAL 1942 M
		THERMOPLASTIC (600MM, 3.1MM)			
T2	WHITE STOPBAR		186	M	
					TOTAL 186 M
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (2.3MM)					
UA	LEFT TURN ARROW		19	EA	
UB	RIGHT TURN ARROW		8	EA	
UC	STRAIGHT ARROW		58	EA	
UE	COMBO. STRAIGHT / RIGHT		5	EA	
					TOTAL 90 EA

24-JUN-2004 12:34
 FA_TIP_FINAL_PMS_R0513C_TC_pmp01.dgn
 msteeleman AT TETC01231

APPROVED:  DATE: 6/25/04	FINAL PAVEMENT MARKING SCHEDULE			
SEAL 	SCALE: NONE			
	DATE:			
	DWG. BY:			
	DESIGN BY:			
REVIEWED BY:		REVISIONS <table border="1" style="width: 100%; height: 40px;"> <tr><td> </td><td> </td></tr> </table>		
		CADD FILE: R513C TC PMP01.DGN		