


NOTES

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN OF ALL METAL POLES AND METAL POLE FOUNDATIONS IN ACCORDANCE WITH THE PLANS AND THE PROJECT SPECIAL PROVISIONS.
2. WIRE INLET SHALL BE EITHER GALVANIZED 50mm RIGID METAL WEATHERHEAD OR DOWNWARDLY ANGLED 50mm GALVANIZED RIGID METAL PIPE, OR APPROVED EQUIVALENT.
3. GROUND ALL METAL POLES AND ATTACHED EQUIPMENT, INCLUDING THE ELECTRICAL POWER SERVICE IN ACCORDANCE WITH THE REQUIREMENTS OF THE PROJECT SPECIAL PROVISIONS, THE TRAFFIC SIGNAL SPECIFICATIONS, AND THE DETAILS.
4. PROVIDE ALL NECESSARY HARDWARE FOR ATTACHING EQUIPMENT TO A METAL POLE THAT IS APPROPRIATE FOR THE SIZESHAPE OF POLE AT THE PROPOSED ATTACHMENT POINT.
5. THE RADIUS OF THE BEND IN BOTH 50mm RIGID METAL CONDUITS STUBBED OUT OF THE POLE FOUNDATION SHALL NOT BE LESS THAN 356mm.
6. THE CCTV CAMERA ENCLOSURE SHALL BE MOUNTED ON THE MAINLINE TRAFFIC SIDE OF THE POLE AND PERPENDICULAR TO THE ROADWAY UNLESS ENGINEER DIRECTS OTHERWISE.


HNTB HNTB NORTH CAROLINA, P.C.
343 E. Six Forks Road, Suite 200
Raleigh, North Carolina 27609

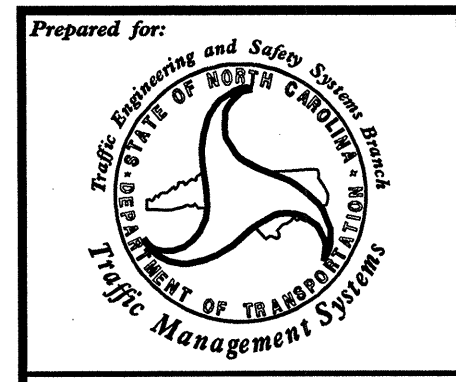

DETAILS FOR METAL POLE, CCTV CAMERA AND POLE-MOUNTED EQUIPMENT CABINET

DIVISION 06 ROBESON COUNTY

PLAN DATE: APRIL 2004	REVIEWED BY: J. P. HOCHANADEL
PREPARED BY: T. R. TERRELL	REVIEWED BY: H. L. WINSTEAD

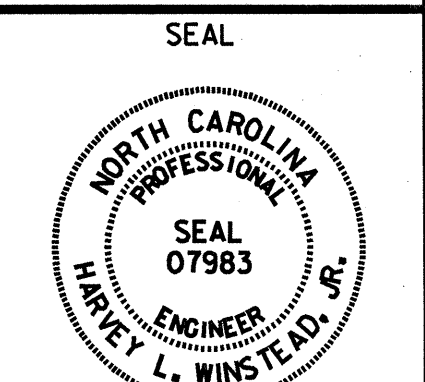

REVISIONS	INIT.	DATE

SCALE	0	NONE
-------	---	------

SIGNATURE: *H. L. Winstead* DATE: 6/21/04
CADD FILE NAME: ITS-02B.dgn