

BILL OF MATERIAL					
CONCRETE MEDIAN					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
*A3	179	#13	STR	800	142
*B4	12	#13	STR	5500	66
*B5	24	#13	STR	8320	198


\* EPOXY COATED REINFORCING STEEL : (Kg.) = 406

CLASS "A" CONCRETE : (CU. METER) = 11.1

NOTE: NO SEPARATE MEASUREMENT OR PAYMENT WILL BE MADE FOR MATERIALS OR LABOR REQUIRED TO CONSTRUCT THE CONCRETE MEDIAN. THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE LUMP SUM PRICE BID FOR THE REINFORCED CONCRETE DECK SLAB OR BRIDGE APPROACH SLAB.

ALL REINFORCING STEEL IN MEDIANS SHALL BE EPOXY COATED.

PROJECT NO. R-513C  
ROBESON COUNTY  
 STATION: 298+57.237 -L-

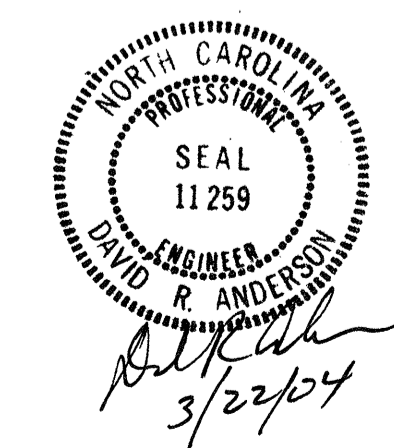

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH

**SUPERSTRUCTURE**  
**CONCRETE MEDIAN**

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	5-262
1			3			TOTAL SHEETS
2			4			312

DRAWN BY : S. M. RASHIDI DATE : 10/10/02  
 CHECKED BY : N. Q. TRAN DATE : 10/10/02