


TOTAL BILL OF MATERIAL												
RIGHT LANE BRIDGE	REINFORCED CONCRETE DECK SLAB	GROOVING BRIDGE FLOORS	CLASS A CONCRETE	BRIDGE APPROACH SLABS	REINFORCING STEEL	STRUCTURAL STEEL	HP 12 X 53 STEEL PILES		CONCRETE BARRIER RAIL	4" SLOPE PROTECTION	ELASTOMERIC BEARINGS	EVAZOTE JOINT SEALS
	SQ. FT.	SQ. FT.	CU. YDS.	LUMP SUM	LBS.	APPROX. LBS.	NO.	LIN. FT.	LIN. FT.	SQ. YDS.	LUMP SUM	LUMP SUM
SUPERSTRUCTURE	6,890	8,131		LUMP SUM		276,000			279.79		LUMP SUM	LUMP SUM
END BENT No. 1			34.4		5,356		12	780		355		
END BENT No. 2			34.4		5,356		12	720		370		
TOTAL	6,890	8,131	68.8	LUMP SUM	10,712	276,000	24	1,500	279.79	725	LUMP SUM	LUMP SUM

PROJECT NO. R-2417BB
LEE COUNTY
 STATION: 565+49.40 -L-
= 29+46.21 -Y3-
 SHEET 3 OF 3

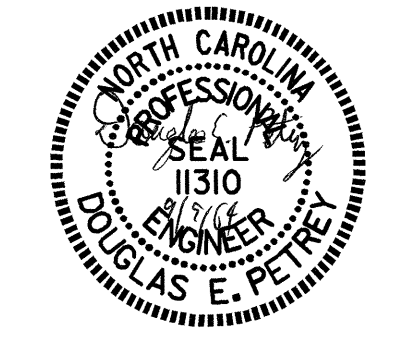

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH
GENERAL DRAWING
 RIGHT LANE BRIDGE
 OVER NC 42 ON
 US 421/NC 87 SANFORD BYPASS
 BETWEEN SR 1524 AND US 421

DRAWN BY: MIKE BRITT DATE: 8-23-04
 CHECKED BY: P.C. BREWER DATE: 8-24-04

08-SEP-2004 15:27
 w:\squadw\2417BB\mbr111\Microstation\STR3\R2417BB03gd.dgn
 mbr111

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	S-58
1			3			TOTAL SHEETS 78
2			4			