



BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.

BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETERMINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.

NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR THE SEVERAL PAY ITEMS.

### TEMPORARY DRAINAGE AT END BENT

BAR TYPES						BILL OF MATERIAL					
						END BENT #1					
BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT	BAR	NO.	SIZE	TYPE	LENGTH	WEIGHT
B1	8	#29	1	17400	704	H1	18	#16	4	1900	53
B2	2	#16	STR	16700	52	H2	18	#16	3	1400	39
B3	8	#13	STR	8720	69	K1	16	#13	STR	8720	139
B4	14	#13	STR	740	10	K2	8	#13	STR	860	7
S1	52	#13	5	2260	117	S1	52	#13	5	2260	117
S2	52	#13	2	980	51	S2	52	#13	2	980	51
S3	22	#13	8	1980	43	S3	22	#13	8	1980	43
U1	50	#13	6	1120	56	U1	50	#13	6	1120	56
V1	100	#16	STR	1800	279	V1	100	#16	STR	1800	279
V2	20	#16	STR	2100	65	V2	20	#16	STR	2100	65
V3	18	#16	STR	2220	62	V3	18	#16	STR	2220	62
REINFORCING STEEL										=	1746 KG.
CLASS A CONCRETE BREAKDOWN											
POUR #1 (CAP, LOWER PART OF WINGS)										11.9	CU. M.
POUR #2 (BACKWALL AND UPPER PART OF WING)										7.3	CU. M.
TOTAL										19.2	CU. M.
HP 310 X 79 STEEL PILES											
NO. 11										METERS	121.5

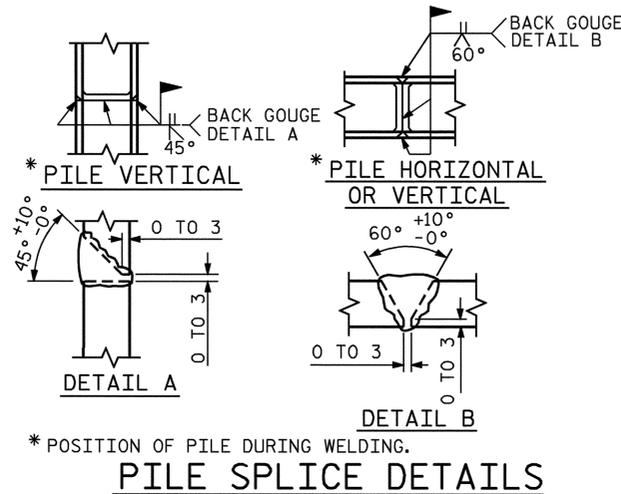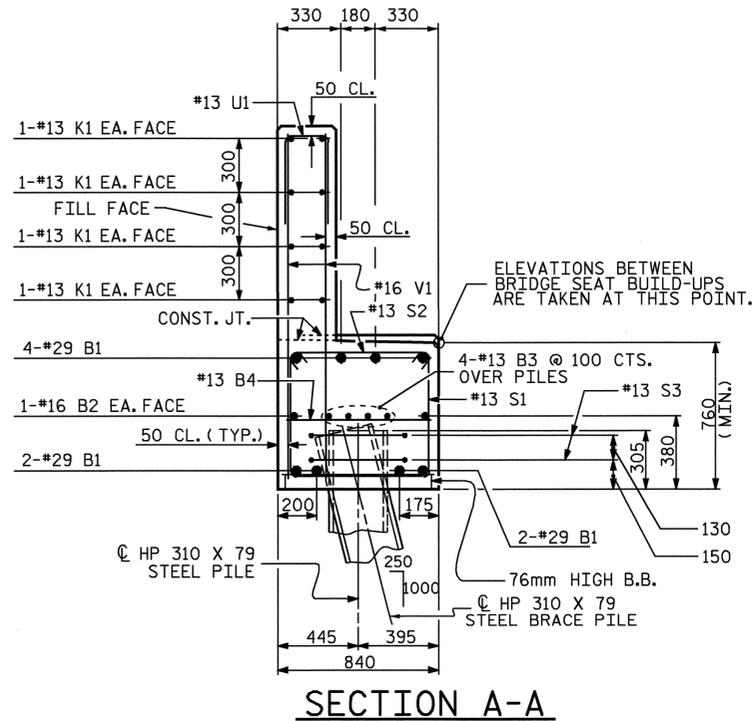

PROJECT NO. R-2206C  
 LINCOLN- CATAWBA COUNTY  
 STATION: 245+91.502 -L-

SHEET 3 OF 3

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH					
SUBSTRUCTURE END BENT 1 RIGHT LANE					
REVISIONS					TOTAL SHEETS
NO.	BY:	DATE:	NO.	BY:	DATE:
1			3		
2			4		
					3-294
					374

*Emily E. Murray*  
 7/15/04

DRAWN BY : ZION J. RORIE DATE : 7/13/04  
 CHECKED BY : C. MILLER DATE : 7/15/04