





PROJ. REFERENCE NO.	SHEET NO.
R-2562D	PM-1

PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
THERMOPLASTIC (100mm, 2.3mm)			
TA	WHITE EDGELINE	8530 m	
TB	YELLOW EDGE LINE	5734 m	
			TOTAL 14264 m
THERMOPLASTIC (100mm, 3.1mm)			
TC	3m WHITE SKIP	3312 m	
TD	0.3m WHITE MINISKIP	210 m	
TE	WHITE SOLID LANE LINE	896 m	
TF	3m YELLOW SKIP	1761 m	
TH	YELLOW SINGLE CENTER LINE	7080 m	
TI	YELLOW DOUBLE CENTER LINE	1530 m	
			TOTAL 14789 m
THERMOPLASTIC (200mm, 2.3mm)			
TT	YELLOW DIAGONAL	28 m	
			TOTAL 28 m
THERMOPLASTIC (600mm, 3.1mm)			
T2	WHITE STOP BAR	133 m	
			TOTAL 133 m
PAINT (100mm)			
PA	WHITE EDGELINE 2X	3039 m	
PI	YELLOW DOUBLE CENTER LINE 2X	3582 m	
			TOTAL 6621 m
PAINT (600mm)			
P4	WHITE STOP BAR 2X	267 m	
			TOTAL 267 m
PAVEMENT MARKING SYMBOLS			
THERMOPLASTIC THICK SYMBOL (2.3mm)			
UA	LEFT TURN ARROW	102 EA	
UB	RIGHT TURN ARROW	16 EA	
UC	STRAIGHT ARROW	106 EA	
UE	COMBINATION STRAIGHT & RIGHT TURN A	38 EA	
			TOTAL 262 EA
THERMOPLASTIC THICK CHARACTER (3.1mm)			
UI	ALPHANUMERIC CHARACTER	32 EA	
			TOTAL 32 EA
PAVEMENT MARKERS			
PERMANENT RAISED			
MA	YELLOW & YELLOW	144 EA	
MB	CRYSTAL & RED	17 EA	
			TOTAL 161 EA
SNOWPLOWABLE RAISED			
ME	TYPE 2, YELLOW & YELLOW	554 EA	
MF	TYPE 3, CRYSTAL & RED	926 EA	
			TOTAL 1480 EA


NOTE: FOR EACH PAVEMENT MARKING ITEM, 1X IMPLIES A SINGLE APPLICATION, 2X IMPLIES TWO APPLICATIONS, AND 3X IMPLIES THREE APPLICATIONS.

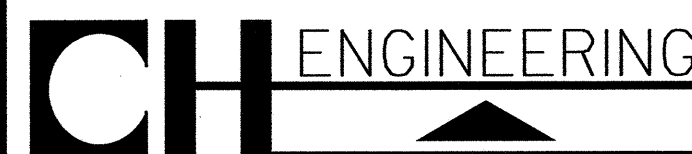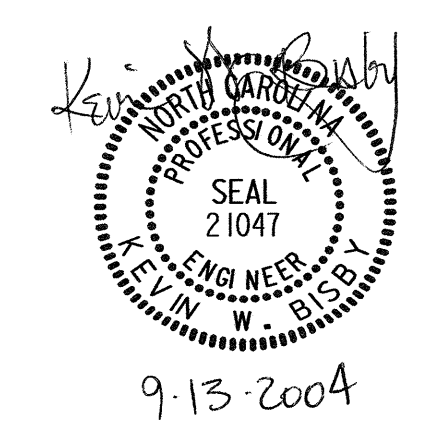

PO BOX 30128 TELE 919.788.0224
RALEIGH, NC 27622 FAX 919.788.0232

FINAL PAVEMENT MARKING SCHEDULE

SCALE:	NONE
DATE:	9/2004
DWG. BY:	KWB
DESIGN BY:	KWB
REVIEWED BY:	TRH

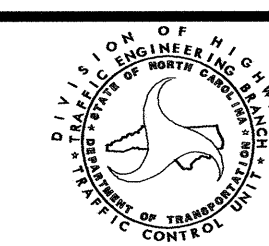

REVISIONS	

9/13/2004 10:31:31 AM F:\Projects\wether\11\Y-2562\1\Ficcont\01\Yob\Y-2562.dwg pm.psf01.dgn