





PROJ. REFERENCE NO.	SHEET NO.
R-2562D	TCP-1A

TEMPORARY PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
PAVEMENT MARKING LINES			
PAINT (100mm)			
PA	WHITE EDGELINE 2X	33386 m	
PC	3m WHITE SKIP 2X	212 m	
PD	0.3m WHITE MINISKIP 2X	55 m	
PE	WHITE SOLID LANE LINE 2X	485 m	
PI	YELLOW DOUBLE CENTER LINE 2X	35135 m	
			TOTAL 69273 m
PAINT (200mm)			
PR	WHITE GORELINE 2X	813 m	
PS	WHITE DIAGONAL 2X	129 m	
PV	YELLOW DIAGONAL 2X	69 m	
			TOTAL 1011 m
PAINT (600mm)			
P4	WHITE STOP BAR 2X	506 m	
			TOTAL 506 m
PAVEMENT MARKING SYMBOLS			
PAINT SYMBOL			
QA	LEFT TURN ARROW 2X	30 EA	
QB	RIGHT TURN ARROW 2X	20 EA	
QC	STRAIGHT ARROW 2X	32 EA	
QE	COMBO STRAIGHT & RIGHT TURN ARROW 2	8 EA	
			TOTAL 90 EA
PAINT CHARACTER			
QI	ALPHANUMERIC CHARACTER 2X	16 EA	
			TOTAL 16 EA
PAVEMENT MARKERS			
TEMPORARY RAISED			
MH	YELLOW & YELLOW	732 EA	
MI	CRYSTAL & RED	288 EA	
			TOTAL 1020 EA

NOTE: FOR EACH PAINT PAVEMENT MARKING ITEM, 1X IMPLIES A SINGLE APPLICATION, 2X IMPLIES TWO APPLICATIONS, AND 3X IMPLIES THREE APPLICATIONS.

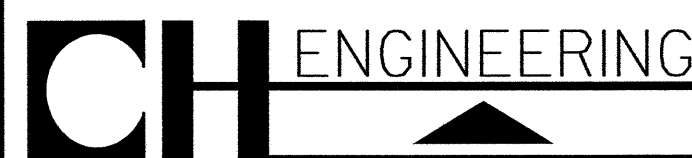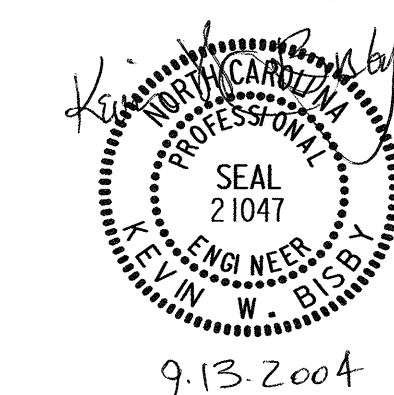

PO BOX 30128 TELE 919.788.0224
RALEIGH, NC 27622 FAX 919.788.0232

TEMPORARY PAVEMENT MARKING SCHEDULE	
SCALE: NONE	
DATE: 9/2004	
DWG. BY: KWB	
DESIGN BY: KWB	
REVIEWED BY: TRH	
REVISIONS	