



CLASS A CONCRETE POUR #1

POUR #1 POUR #2 TOTAL

NO. 9

13.4 CU. YDS. 11.5 CU. YDS. 24.9 CU. YDS.

HP 12 × 53 STEEL PILES

360 FEET

MINIMUM OF 3- ONE CUBIC
FOOT BAGS OF #78M STONE.
BAGS SHALL BE OF POROUS
FABRIC, SECURELY TIED.

GRADE TO DRAIN


TOE OF SLOPE

BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.


BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETERMINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.

NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR THE SEVERAL PAY ITEMS.

TEMPORARY DRAINAGE AT END BENT

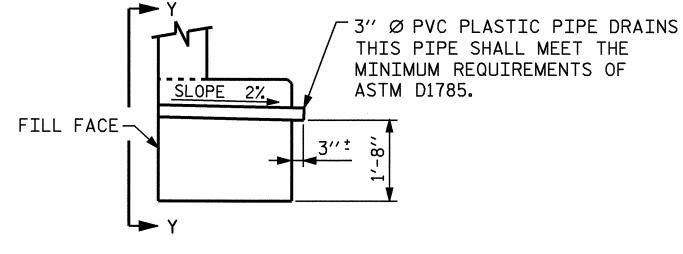


## SECTION THRU CAP

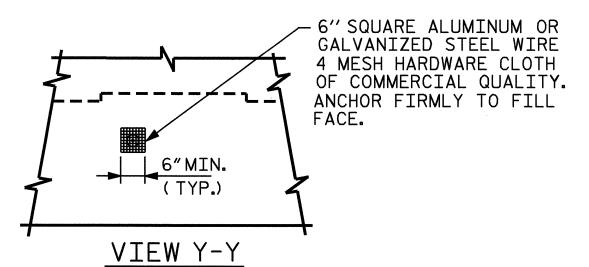

NOTE: NO SEPARATE PAYMENT WILL BE MADE FOR FURNISHING AND INSTALLING THE PVC PLASTIC PIPE DRAINS, HARDWARE CLOTH AND FASTENERS. THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE FOR THE SEVERAL PAY ITEMS.

PIPE DRAIN DETAILS

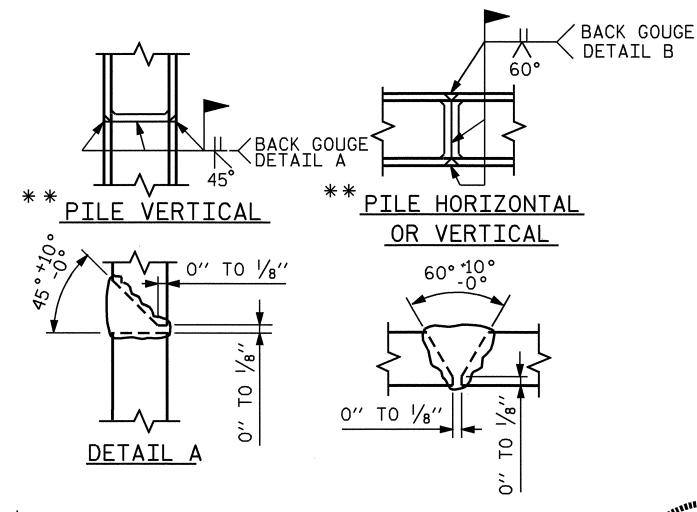

\*\*
POSITION OF PILE DURING WELDING. DETAIL B

PILE SPLICE DETAILS

PROJECT NO. B-4334

DAVIDSON COUNTY

STATION: 27+49.00 -L-

SHEET 3 OF 3

DEPARTMENT OF TRANSPORTATION
RALEIGH

SUBSTRUCTURE END BENT #2

REVISIONS					SHEET NO.
BY:	DATE:	NO.	BY:	DATE:	S-26
		3			TOTAL SHEETS
		4			34

DRAWN BY: D.G.ELY / DAD DATE: 4/02
CHECKED BY: D.A.DAVENPORT DATE: 9/03