


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS
INDEX OF SHEETS

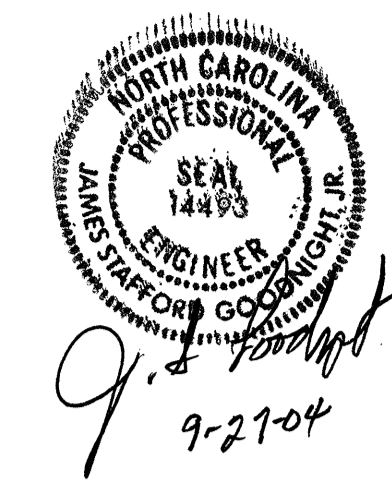

C201233
DAVIE COUNTY

SHEET NUMBER	SHEET	INDEX OF SHEETS
1	TITLE SHEET	
1-A	INDEX OF SHEETS, GENERAL NOTES, AND LIST OF STANDARDS	
2 THRU 2-A	TYPICAL SECTIONS & DETAILS	
2-B THRU 2-E	DETAIL OF GUARDRAIL PLACEMENT	
2-F	DETAIL SHOWING CONTINUOUSLY REINFORCED CONCRETE REPAIRS	
2-G	DETAIL OF TEMPORARY GRAVEL CONSTRUCTION ENTRANCE	
3	SUMMARY OF QUANTITIES	
3-A	PAVEMENT REMOVAL SUMMARY, GUARDRAIL SUMMARY, EARTHWORK SUMMARY, & CRC REMOVAL AND REPLACEMENT SUMMARY	
3-B	SHOULDER DRAIN SUMMARY	
4	PLAN SHEET	
TCP-1 THRU TCP-14	TRAFFIC CONTROL PLANS	
PM-1	PAVEMENT MARKING PLANS	
SIGN-1 THRU SIGN-3	SIGNING PLANS	

GENERAL NOTES: 2002 SPECIFICATIONS
EFFECTIVE: 01-15-02

GRADE LINE:
GRADING AND SURFACING OR RESURFACING AND WIDENING:
THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINTS SHOWN ON THE TYPICAL SECTIONS. WHERE NO GRADE LINES ARE SHOWN, THE PROFILES SHOWN DENOTE THE TOP ELEVATION OF THE EXISTING PAVEMENT ALONG THE CENTER LINE OF SURVEY ON WHICH THE PROPOSED RESURFACING WILL BE PLACED. GRADE LINES MAY BE ADJUSTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE-IN.

SHOULDER DRAINS:
SHOULDER DRAINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH **STD. NO. 816.02** AND DETAILS IN PLANS AT LOCATIONS DIRECTED BY THE ENGINEER.

GUARDRAIL:
THE GUARDRAIL LOCATIONS SHOWN ON THE PLANS MAY BE ADJUSTED DURING CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHOULD CONSULT WITH THE ENGINEER PRIOR TO ORDERING GUARDRAIL MATERIAL.

EFF. 01-15-02

ROADWAY ENGLISH STANDARD DRAWINGS
The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N. C. Department of Transportation - Raleigh, N. C., Dated January 15, 2002 are applicable to this project and by reference hereby are considered a part of these plans:

STD.NO.	TITLE
DIVISION 6 - ASPHALT BASES AND PAVEMENTS	
665.01	Milled Rumble Strips - Asphalt Pavements
DIVISION 8 - INCIDENTALS	
816.02	Aggregate Shoulder Drain
816.04	Markers for Drainage Structure and Concrete Pad
862.01	Guardrail Placement

5/28/04

13-SEP-2004 10:23
RAV Pro: N13600_rdy_TSH.dgn
JE Johnson AT