


STATE OF NORTH CAROLINA  
DIVISION OF HIGHWAYS  
**INDEX OF SHEETS**

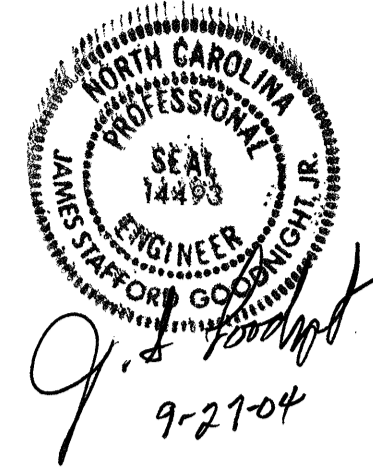

C201233  
DAVIE COUNTY

<u>SHEET NUMBER</u>	<u>SHEET</u>	<u>INDEX OF SHEETS</u>
1	TITLE SHEET	
1-A	INDEX OF SHEETS, GENERAL NOTES, AND LIST OF STANDARDS	
2 THRU 2-A	TYPICAL SECTIONS & DETAILS	
2-B THRU 2-E	DETAIL OF GUARDRAIL PLACEMENT	
2-F	DETAIL SHOWING CONTINUOUSLY REINFORCED CONCRETE REPAIRS	
2-G	DETAIL OF TEMPORARY GRAVEL CONSTRUCTION ENTRANCE	
3	SUMMARY OF QUANTITIES	
3-A	PAVEMENT REMOVAL SUMMARY, GUARDRAIL SUMMARY, EARTHWORK SUMMARY, & CRC REMOVAL AND REPLACEMENT SUMMARY	
3-B	SHOULDER DRAIN SUMMARY	
4	PLAN SHEET	
TCP-1 THRU TCP-14	TRAFFIC CONTROL PLANS	
PM-1	PAVEMENT MARKING PLANS	
SIGN-1 THRU SIGN-3	SIGNING PLANS	

GENERAL NOTES:

2002 SPECIFICATIONS  
EFFECTIVE: 01-15-02

**GRADE LINE:  
GRADING AND SURFACING OR RESURFACING AND WIDENING:**

THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINTS SHOWN ON THE TYPICAL SECTIONS. WHERE NO GRADE LINES ARE SHOWN, THE PROFILES SHOWN DENOTE THE TOP ELEVATION OF THE EXISTING PAVEMENT ALONG THE CENTER LINE OF SURVEY ON WHICH THE PROPOSED RESURFACING WILL BE PLACED. GRADE LINES MAY BE ADJUSTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE-IN.

**SHOULDER DRAINS:**

SHOULDER DRAINS SHALL BE CONSTRUCTED IN ACCORDANCE WITH **STD. NO. 816.02** AND DETAILS IN PLANS AT LOCATIONS DIRECTED BY THE ENGINEER.

**GUARDRAIL:**

THE GUARDRAIL LOCATIONS SHOWN ON THE PLANS MAY BE ADJUSTED DURING CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHOULD CONSULT WITH THE ENGINEER PRIOR TO ORDERING GUARDRAIL MATERIAL.

EFF. 01-15-02

ROADWAY ENGLISH STANDARD DRAWINGS

The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N. C. Department of Transportation - Raleigh, N. C., Dated January 15, 2002 are applicable to this project and by reference hereby are considered a part of these plans.

STD.NO. TITLE

**DIVISION 6 - ASPHALT BASES AND PAVEMENTS**

665.01 Milled Rumble Strips - Asphalt Pavements

**DIVISION 8 - INCIDENTALS**

816.02 Aggregate Shoulder Drain

816.04 Markers for Drainage Structure and Concrete Pad

862.01 Guardrail Placement