
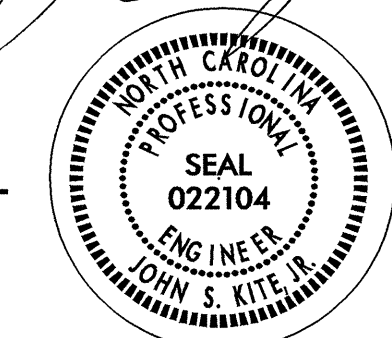
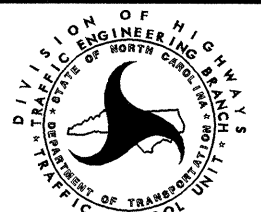


PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY	
		FINAL PAVEMENT MARKINGS			
TA	WHITE EDGELINE	THERMOPLASTIC (4", 90 MILS)	7619	LF	
					TOTAL 7619 LF
TC	10 FT. WHITE SKIP	THERMOPLASTIC (4", 120 MILS)	1721	LF	
TD	2 FT. WHITE MINISKIP		108	LF	
TE	WHITE SOLID LANE LINE		933	LF	
TF	10 FT. YELLOW SKIP		641	LF	
TH	YELLOW SINGLE CENTER		2563	LF	
TI	YELLOW DOUBLE CENTER		8184	LF	
					TOTAL 14150 LF
TT	YELLOW DIAGONAL	THERMOPLASTIC (8", 90 MILS)	89	LF	
					TOTAL 89 LF
T2	WHITE STOPBAR	THERMOPLASTIC (24", 120 MILS)	339	LF	
T3	WHITE CROSSWALK LINE		481	LF	
					TOTAL 820 LF
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)					
UA	LEFT TURN ARROW		19	EA	
UB	RIGHT TURN ARROW		2	EA	
UC	STRAIGHT ARROW		19	EA	
UE	COMBO. STRAIGHT/RIGHT		5	EA	
UG	LEFT/RIGHT/STRAIGHT		2	EA	
					TOTAL 47 EA
MARKERS					
PERMANENT RAISED PAVEMENT MARKERS					
MA	YELLOW & YELLOW		100	EA	
MB	CRYSTAL & RED		266	EA	
MA	YELLOW & YELLOW		100	EA	
MB	CRYSTAL & RED		266	EA	
					TOTAL 366 EA
					TOTAL 366 EA

21-SEP-2004 10:03
 \\sfs-cet\p01\U3328\TGP\FMP\U3328-TC-PMP01.dgn
 rmgorreft AT 1E1C206372

APPROVED:  DATE: 9/21/04	PAVEMENT MARKING SCHEDULE								
	SCALE: NONE								
	DATE: 07/04								
	DWG. BY: MLM								
	DESIGN BY: RMG								
REVIEWED BY: JDK	<table border="1"> <tr> <th colspan="2">REVISIONS</th> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>	REVISIONS							
REVISIONS									