




PROJ. REFERENCE NO.	SHEET NO.
R-2911A	TCP-2

TEMP. PAV'T MARKING SCHEDULE

SYMBOL	DESCRIPTION	QUANTITY BREAKDOWN	PAY ITEM	TOTAL QUANTITY
PAVEMENT MARKING LINES				
			PAINT (100 mm)	
PA	WHITE EDGELINE	40,874 m		
PB	YELLOW EDGELINE	396 m		
PC	3 m WHITE SKIP	180 m		
PD	0.5 m WHITE MINISKIP	201 m		
PE	WHITE SOLID LANE LINE	1025 m		
PI	YELLOW DOUBLE CENTER LINE	54,204 m		
		TOTAL		96,880 m
			PAINT (150 mm)	
P6	WHITE EDGELINE	284 m		
		TOTAL		284 m
			PAINT (200 mm)	
PS	WHITE DIAGONAL	120 m		
PR	WHITE GORE LINE	148 m		
PV	YELLOW DIAGONAL	323 m		
		TOTAL		591 m
			PAINT (600 mm)	
P4	WHITE STOP BAR	616 m		
		TOTAL		616 m
			REMOVABLE TAPE (100 mm)	
RA	WHITE EDGELINE	1103 m		
RI	YELLOW DOUBLE CENTERLINE	1138 m		
		TOTAL		2,241 m
R3	WHITE STOPBAR	35 m		
		TOTAL		35 m
PAVEMENT MARKING SYMBOLS				
			PAINT SYMBOL	
QA	LEFT TURN ARROW	19 EA		
QB	RIGHT TURN ARROW	24 EA		
QC	STRAIGHT ARROW	11 EA		
QD	COMBO STRAIGHT AND LEFT TURN ARROW	4 EA		
QE	COMBO STRAIGHT AND RIGHT TURN ARROW	15 EA		
QF	COMBO LEFT AND RIGHT TURN ARROW	22 EA		
QG	COMBO LEFT, RIGHT AND STRAIGHT ARROW	4 EA		
		TOTAL		99 EA
			PAINT CHARACTER	
QI	ALPHANUMERIC CHARACTER	54 EA		
		TOTAL		54 EA
			REMOVABLE TAPE SYMBOL	
SF	COMBO LEFT AND RIGHT TURN ARROW	4 EA		
		TOTAL		4 EA
PAVEMENT MARKERS				
			TEMPORARY RAISED	
MH	YELLOW & YELLOW	1,117 EA		
MI	CRYSTAL & RED	111 EA		
		TOTAL		1,228 EA

Plans prepared by:
KO & ASSOCIATES, P.C.
Consulting Engineers
101 SCHAUB DR., SUITE #202
RALEIGH, N.C. 27606
For Division of Highways

APPROVED: *Mark Acuff* DATE: 8/10/03

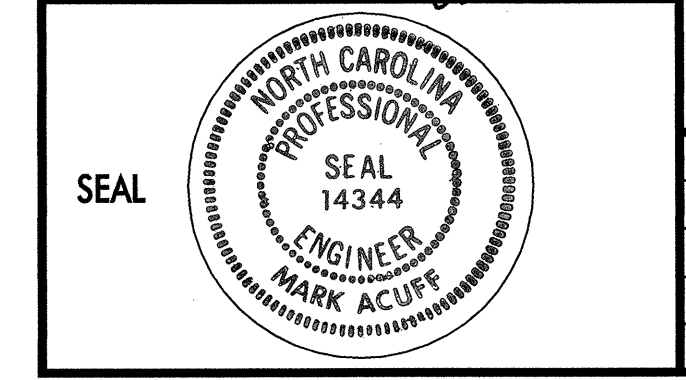

TEMPORARY PAVEMENT MARKING SCHEDULE

SCALE:	NONE		REVISIONS
DATE:	8-20-03		
DWG. BY:	B.L.M.		
DESIGN BY:	B.L.M.		
REVIEWED BY:	M.S.A.		