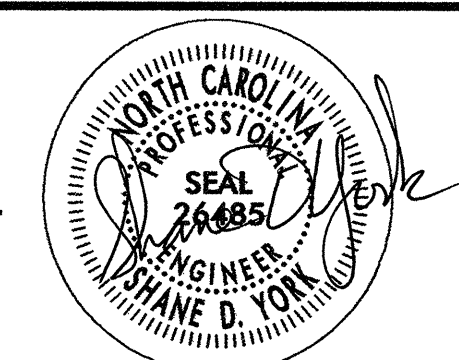



### FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM/ QUANTITY BREAKDOWN	TOTAL QUANTITY
<b>PAVEMENT MARKING LINES</b>			
TA	- THERMOPLASTIC (4" WHITE, 90 mils)	EDGE LINE	4878 FT
TC	- THERMOPLASTIC (4" WHITE, 120 mils)	10 ft SKIP LINE	10398 FT
TD	- THERMOPLASTIC (4" WHITE, 120 mils)	2 ft MINISKIP	2593 FT
TE	- THERMOPLASTIC (4" WHITE, 120 mils)	SOLID LANE LINE	10448 FT
TF	- THERMOPLASTIC (4" YELLOW, 120 mils)	10 FT SKIP LINE	244 FT
TH	- THERMOPLASTIC (4" YELLOW, 120 mils)	SINGLE CENTER LINE	974 FT
TI	- THERMOPLASTIC (4" YELLOW, 120 mils)	DOUBLE CENTER LINE	11764 FT
TO	- THERMOPLASTIC (8" WHITE, 90 mils)	CROSSWALK	1024 FT
TQ	- THERMOPLASTIC (8" WHITE, 90 mils)	DIAGONAL	699 FT
TT	- THERMOPLASTIC (8" YELLOW, 90 mils)	DIAGONAL	497 FT
T2	- THERMOPLASTIC (24" WHITE, 120 mils)	STOP BAR	2090 FT
			<b>TOTAL 45679 FT</b>
<b>PAVEMENT MARKING SYMBOLS</b>			
UA	- THERMOPLASTIC (LEFT TURN ARROW, 90 mils)		89
UB	- THERMOPLASTIC (RIGHT TURN ARROW, 90 mils)		51
UC	- THERMOPLASTIC (STRAIGHT ARROW, 90 mils)		102
UD	- THERMOPLASTIC (COMBINATION STRAIGHT AND LEFT TURN ARROW, 90 mils)		3
UE	- THERMOPLASTIC (COMBINATION STRAIGHT AND RIGHT TURN ARROW, 90 mils)		6
UF	- THERMOPLASTIC (COMBINATION LEFT AND RIGHT TURN ARROW, 90 mils)		6
UG	- THERMOPLASTIC (COMBINATION LEFT, STRAIGHT AND RIGHT TURN ARROW, 90 mils)		1
			<b>TOTAL 258</b>
QC	- PAINT (STRAIGHT ARROW, 2X)		6
			<b>TOTAL 6</b>
<b>TEMP RAISED PAVEMENT MARKERS</b>			
MA	- YELLOW & YELLOW		151
MB	- CRYSTAL & RED		1616
			<b>TOTAL 1767</b>

02:48:05 PM  
 11/05/2003  
 R:\TrafficControl\TCP\U0620.TCP\PM01.PSH.DGN

APPROVED: SHANE D. YORK, PE DATE: 11/05/03		<b>FINAL PAVEMENT MARKING SCHEDULE</b>	
	SCALE: N.A.		REVISIONS
	DATE: 11/05/03		
	DESIGN BY: S. YORK		
	REVIEWED BY: A.D. SARVIS		
			CADD FILE