


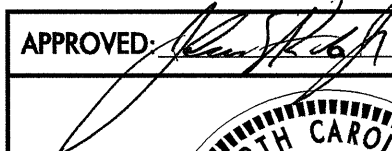

TEMPORARY PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN		TOTAL QUANTITY
TEMPORARY PAVEMENT MARKINGS				
PAINT (4")				
PA	WHITE EDGELINE (2X)	3242	LF	
PB	YELLOW EDGELINE (2X)	80	LF	
PC	10 FT. WHITE SKIP (2X)	210	LF	
PD	2 FT. WHITE MINISKIP (2X)	211	LF	
PE	WHITE SOLID LANE LINE (2X)	1106	LF	
PI	YELLOW DOUBLE CENTER (2X)	1448	LF	
			TOTAL	6297 LF
PAINT (8")				
PR	WHITE GORELINE (2X)	626	LF	
PX	WHITE CROSSWALK LINE (2X)	1440	LF	
			TOTAL	2066 LF
PAINT (24")				
P4	WHITE STOPBAR (2X)	338	LF	
			TOTAL	338 LF
PAINT MARKING CHARACTERS				
QI	ALPHANUMERIC CHAR. (2X)	8	EA	
			TOTAL	8 EA
PAINT MARKING SYMBOLS				
QA	LEFT TURN ARROW (2X)	22	EA	
QB	RIGHT TURN ARROW (2X)	8	EA	
QC	STRAIGHT ARROW (2X)	6	EA	
QD	COMBO.STRAIGHT/LEFT (2X)	2	EA	
QE	COMBO.STRAIGHT/RIGHT (2X)	8	EA	
			TOTAL	46 EA
MARKERS				
TEMPORARY RAISED PAVEMENT MARKERS				
MH	YELLOW & YELLOW	9	EA	
MI	CRYSTAL & RED	55	EA	
			TOTAL	64 EA

21-DEC-2004 07:15
 \\ETS-cct50\us302\TC\REVISED TCP'S\U3302_TC_TCP03.dgn
 msteehan AT 11/12/2003

APPROVED: 	DATE: 12/21/04	TEMPORARY PAVEMENT MARKING SCHEDULE	
	SCALE: NONE		REVISIONS
	DATE:		
	DWG. BY:		
	DESIGN BY:		
	REVIEWED BY:		CARD FILE