


BAGGED STONE AND PIPE SHALL BE PLACED IMMEDIATELY AFTER COMPLETION OF END BENT EXCAVATION. PIPE MAY BE EITHER CONCRETE, CORRUGATED STEEL, CORRUGATED ALUMINUM ALLOY, OR CORRUGATED PLASTIC. PERFORATED PIPE WILL NOT BE ALLOWED.

BAGGED STONE SHALL REMAIN IN PLACE UNTIL THE ENGINEER DIRECTS THAT IT BE REMOVED. THE CONTRACTOR SHALL REMOVE AND DISPOSE OF SILT ACCUMULATIONS AT BAGGED STONE WHEN SO DIRECTED BY THE ENGINEER. BAGS SHALL BE REMOVED AND REPLACED WHENEVER THE ENGINEER DETERMINES THAT THEY HAVE DETERIORATED AND LOST THEIR EFFECTIVENESS.


NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND THE ENTIRE COST OF THIS WORK SHALL BE INCLUDED IN THE UNIT CONTRACT PRICE BID FOR THE SEVERAL PAY ITEMS.

TEMPORARY DRAINAGE AT END BENT

BLOCKOUT IN WING WALL FOR CORED SLAB

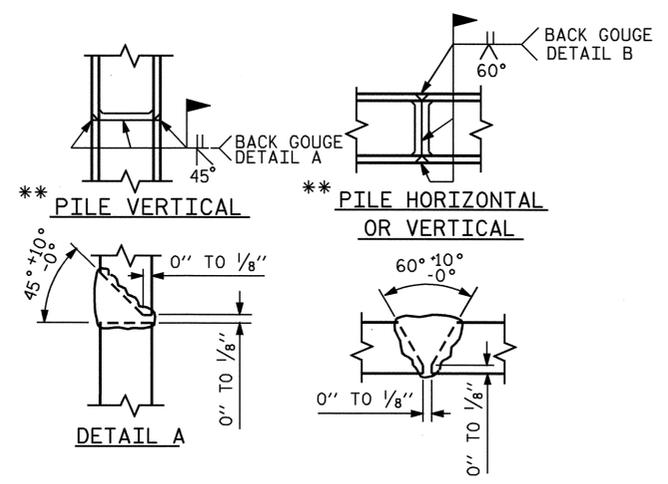

\*\* POSITION OF PILE DURING WELDING. PILE SPLICE DETAILS

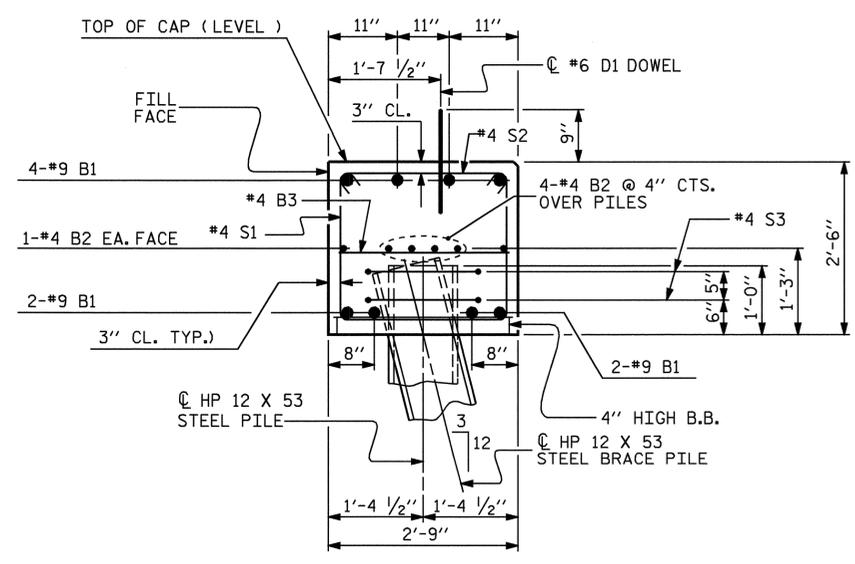

SECTION A-A

PROJECT NO. B-3496  
NEW HANOVER COUNTY  
STATION: 17+67.00 -L-

SHEET 2 OF 3

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
RALEIGH  
  
SUBSTRUCTURE  
END BENT #1



DRAWN BY : PEGGY ADKINS DATE : 7-03  
CHECKED BY : F. GUZMAN DATE : 9-03

| REVISIONS |     |       |     |     | SHEET NO. |
|-----------|-----|-------|-----|-----|-----------|
| NO.       | BY: | DATE: | NO. | BY: | DATE:     |
| 1         |     |       | 3   |     |           |
| 2         |     |       | 4   |     |           |

TOTAL SHEETS: 28