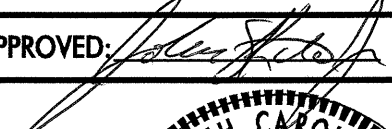
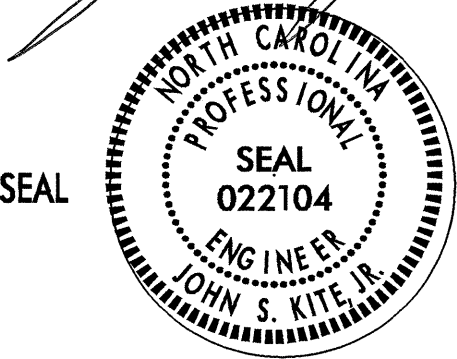
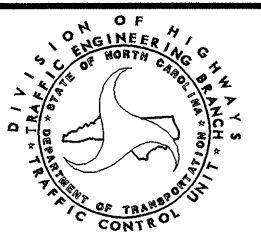


Pavement Marking Schedule  
TIP Project # B-3685

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
FINAL PAVEMENT MARKINGS			
THERMOPLASTIC (4", 120 MILS)			
TD	2 FT. WHITE MINISKIP	99 LF	
TE	WHITE SOLID LANE LINE	543 LF	
TF	10 FT. YELLOW SKIP	334 LF	
TH	YELLOW SINGLE CENTER	1334 LF	
TI	YELLOW DOUBLE CENTER	674 LF	
		TOTAL	2984 LF
THERMOPLASTIC (8", 120 MILS)			
TV	WHITE CROSSWALK LINE	145 LF	
		TOTAL	145 LF
THERMOPLASTIC (24", 120 MILS)			
T2	WHITE STOPBAR	44 LF	
		TOTAL	44 LF
THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)			
UA	LEFT TURN ARROW	9 EA	
UB	RIGHT TURN ARROW	1 EA	
UC	STRAIGHT ARROW	3 EA	
UE	COMBO. STRAIGHT/RIGHT	3 EA	
		TOTAL	16 EA
MARKERS			
PERMANENT RAISED PAVEMENT MARKERS			
MA	YELLOW & YELLOW	41 EA	
		TOTAL	41 EA

24-JAN-2005 15:56  
 \\efs-cdfs01\B3685\TIP\B3685-PM01.dgn  
 sisykes AT 1/11/05 10:53

APPROVED: 	DATE: 1/25/05	<b>PAVEMENT MARKING SCHEDULE</b>									
	SCALE: NONE										
	DATE: 3 / 04										
	DWG. BY: SJS										
	DESIGN BY: SJS										
REVIEWED BY: CLM		<table border="1"> <tr> <th colspan="2">REVISIONS</th> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> </tr> </table>		REVISIONS							
REVISIONS											