




PAVEMENT SCHEDULE			
ITEM	DESCRIPTION	ITEM	DESCRIPTION
C1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 140 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	J1	PROP. 8" AGGREGATE BASE COURSE
C2	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 1 1/2" IN DEPTH.	J2	PROP. 6" AGGREGATE BASE COURSE
D1	PROP. APPROX. 2 1/2" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	T	EARTH MATERIAL
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT GREATER THAN 4" IN DEPTH OR LESS THAN 2 1/4" IN DEPTH.	U	EXISTING PAVEMENT
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YD.	W	WEDGING
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5 1/2" IN DEPTH OR LESS THAN 3" IN DEPTH.		




NOTE: All Pavement Edge Slopes Are To Be 1:1.




* When this distance indicate slopes outside the limits 6:1 to 2:1, the distance becomes variable and the maximum or minimum slope maintained.

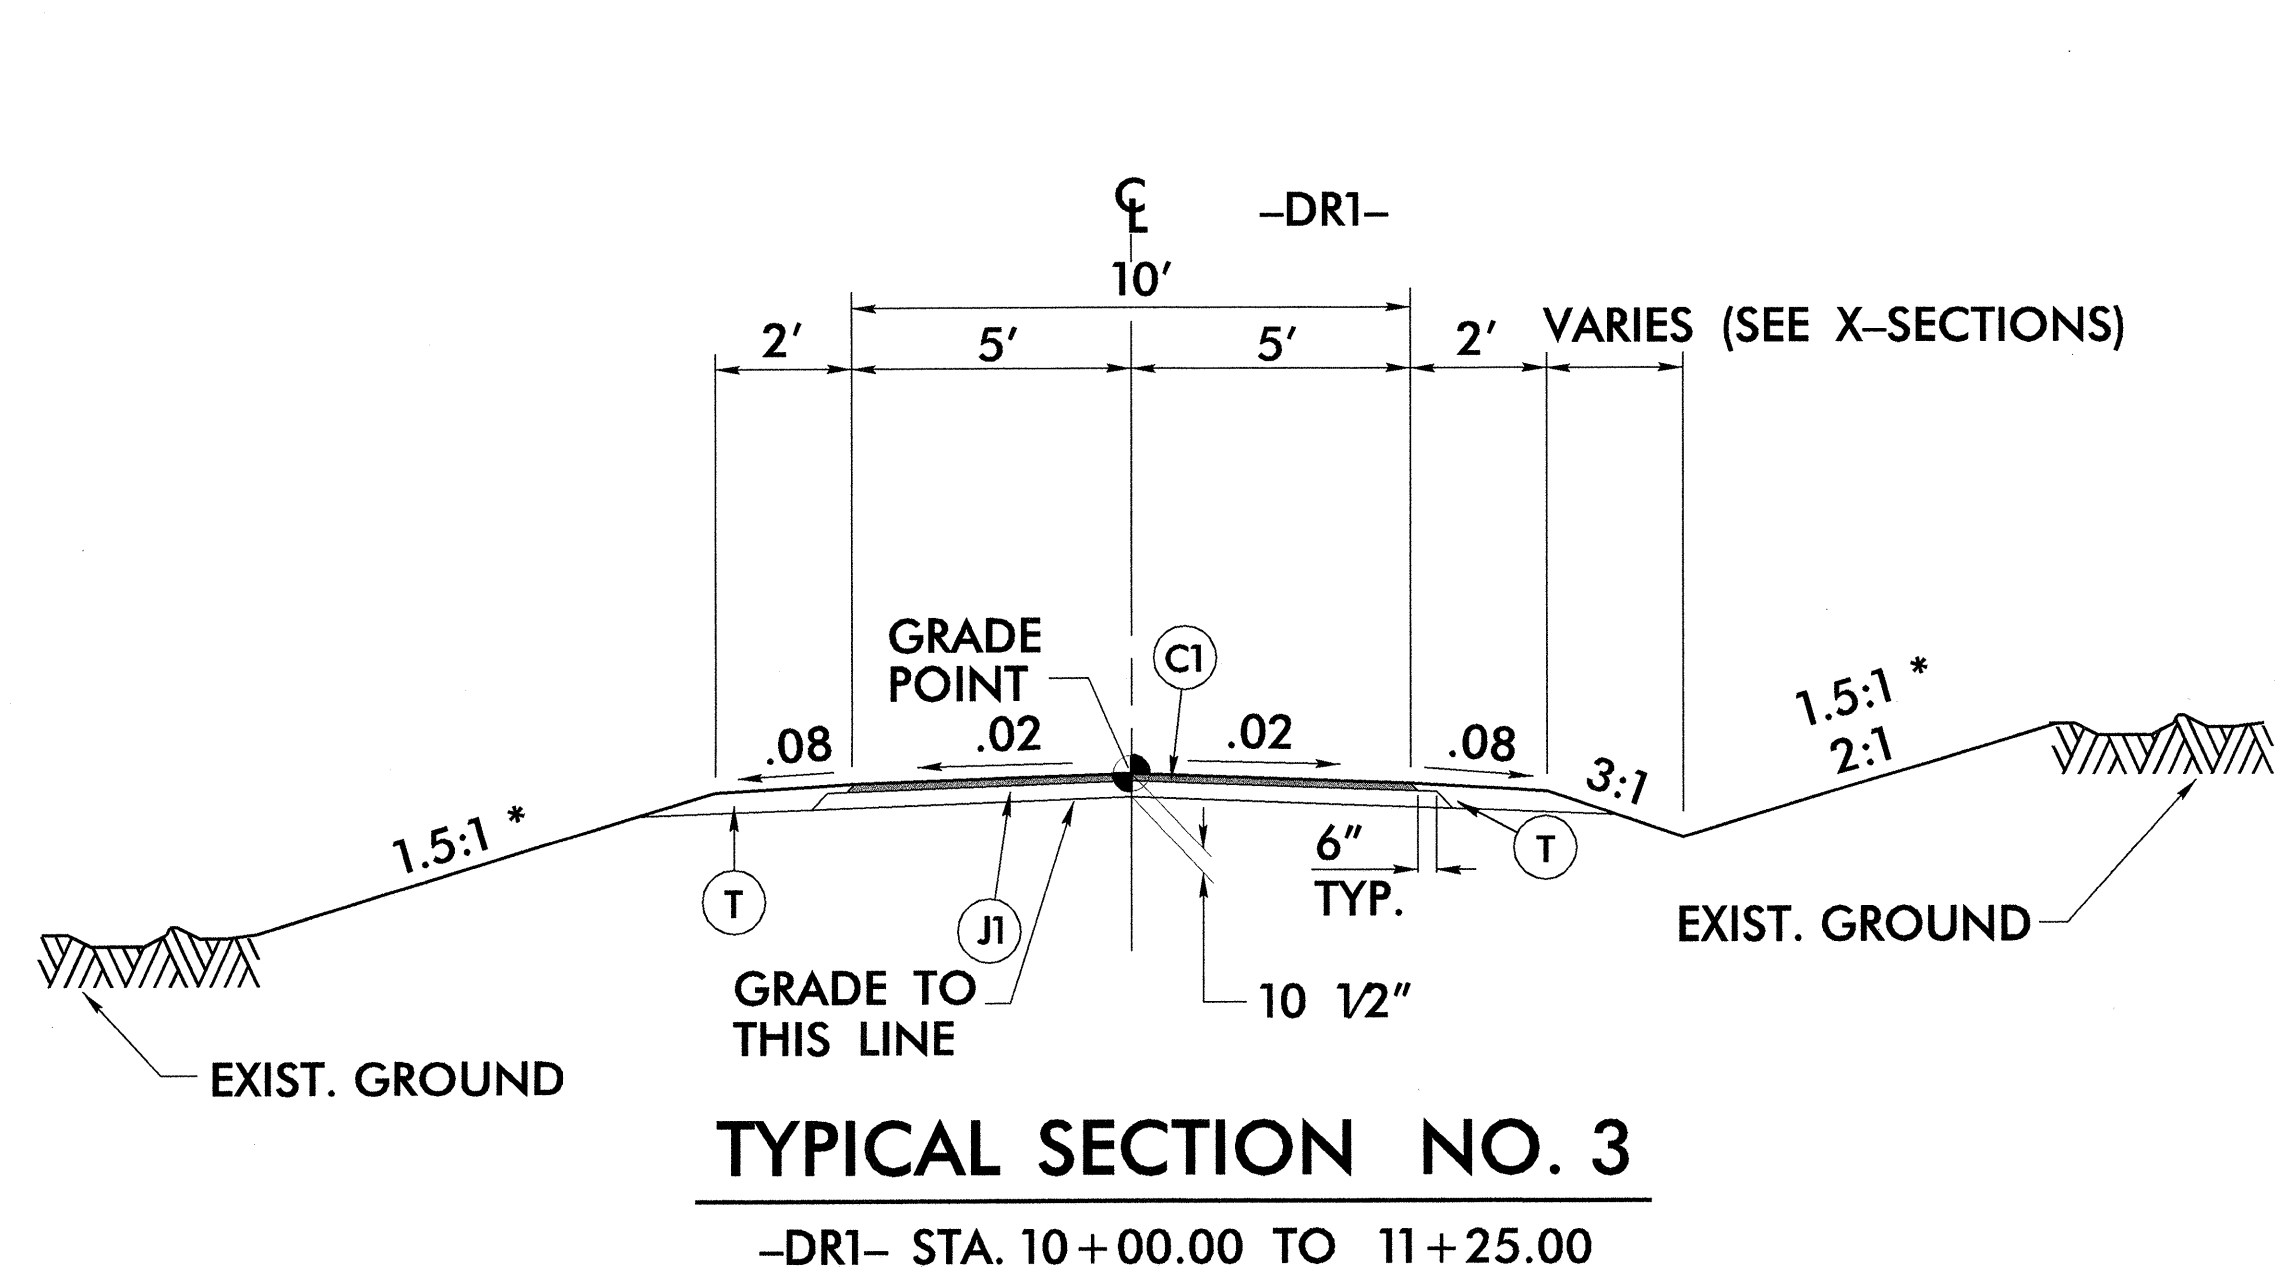

* NOTE: SEE DETAIL 2-B FOR ROCK PLATING

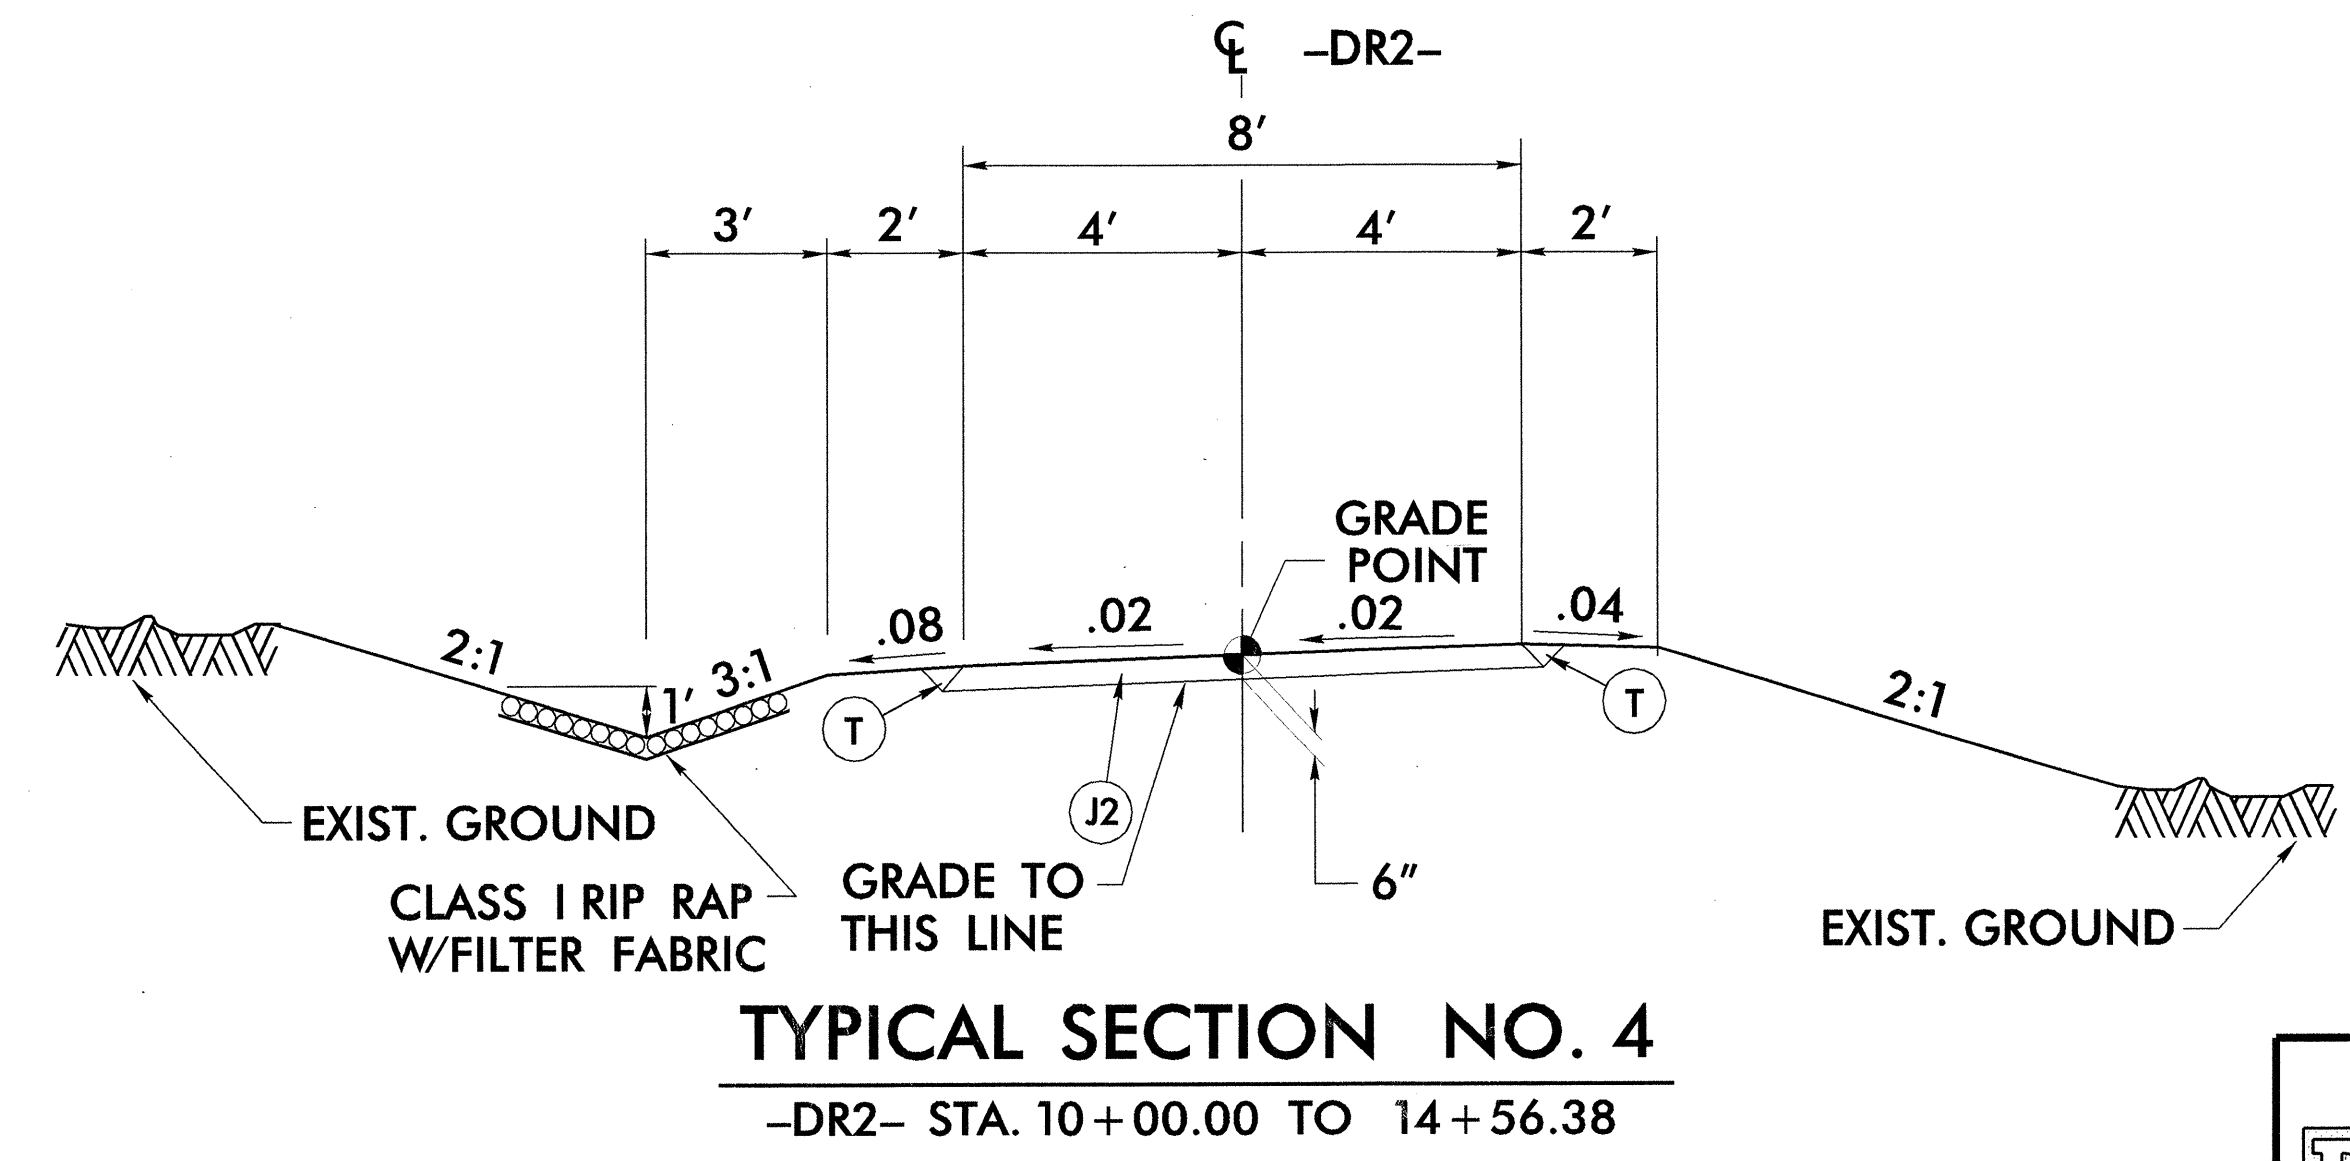

PLANS PREPARED BY:
 RUMMEL • KLEPPER & KAHL, LLP
 consulting engineers
 5800 FARRINGTON PLACE SUITE 105
 RALEIGH, NORTH CAROLINA 27609-3960
 (919) 878-9560
 FOR
 DIVISION OF HIGHWAYS

08/03/2004 11:40:00 am \\p01\proj\B3300\rdy_ttyp.dgn