


STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS

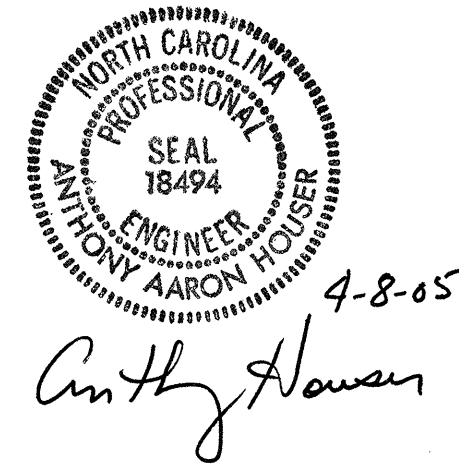

INDEX OF SHEETS

SHEET TITLE	SHEET NUMBERS
1	TITLE
1-A	INDEX OF SHEETS, GENERAL NOTES AND LIST OF STANDARDS
1-B	CONVENTIONAL SYMBOLS
2	TYPICAL SECTIONS, PAVEMENT SCHEDULE AND WEDGING DETAIL
2-A THRU 2-B	REINFORCED BRIDGE APPROACH SLAB FILL DETAIL SHEETS
2-C THRU 2-F	GUARDRAIL INSTALLATION DETAIL SHEETS
2-G THRU 2-H	STRUCTURE ANCHOR UNIT DETAIL SHEETS
3	SUMMARY OF QUANTITIES
3-A	SUMMARIES OF GUARDRAIL, EARTHWORK, DRAINAGE, REMOVAL OF EXISTING ASPHALT PAVEMENT, BREAKING OF ASPHALT PAVEMENT, & PARCEL INDEX
4	PLAN SHEET
5	PROFILE SHEET
TCP-1 THRU TCP-3	TRAFFIC CONTROL
EC-1 THRU EC-5	EROSION PLANS
UC-1 THRU UC-3	UTILITY CONSTRUCTION PLANS
X-1A	CROSS-SECTION SUMMARY SHEET
X-1 THRU X-8	CROSS-SECTIONS
S-1 THRU S-30	STRUCTURE PLANS

EFFECTIVE: 01-15-02
REVISED: 05-14-03

GENERAL NOTES: 2002 SPECIFICATIONS

GRADE LINE:
GRADING AND SURFACING:

THE GRADE LINES SHOWN DENOTE THE FINISHED ELEVATION OF THE PROPOSED SURFACING AT GRADE POINTS SHOWN ON THE TYPICAL SECTIONS. GRADE LINES MAY BE ADJUSTED AT THEIR BEGINNING AND ENDING AND AT STRUCTURES AS DIRECTED BY THE ENGINEER IN ORDER TO SECURE A PROPER TIE-IN.

CLEARING:

CLEARING ON THIS PROJECT SHALL BE PERFORMED TO THE LIMITS ESTABLISHED BY METHOD III.

THE CONTRACTOR'S ATTENTION IS DIRECTED TO THE AREAS IN THE PLANS DESIGNATED SAFETY CLEARING. THE LIMITS ARE AS SHOWN AND THE CLEARING AND GRUBBING IS CONSIDERED A PART OF THE LUMP SUM ITEM FOR "CLEARING AND GRUBBING".

SUPERELEVATION:

ALL CURVES ON THIS PROJECT SHALL BE SUPERELEVATED IN ACCORDANCE WITH STD. NO. 225.04 USING THE RATE OF SUPERELEVATION AND RUNOFF SHOWN ON THE PLANS. SUPERELEVATION IS TO BE REVOLVED ABOUT THE GRADE POINTS SHOWN ON THE TYPICAL SECTIONS.

SHOULDER CONSTRUCTION:

ASPHALT AND EARTH SHOULDER CONSTRUCTION ON THE HIGH SIDE OF SUPERELEVATED CURVES SHALL BE IN ACCORDANCE WITH STD. NO. 560.01.

GUARDRAIL:

THE GUARDRAIL LOCATIONS SHOWN ON THE PLANS MAY BE ADJUSTED DURING CONSTRUCTION AS DIRECTED BY THE ENGINEER. THE CONTRACTOR SHOULD CONSULT WITH THE ENGINEER PRIOR TO ORDERING GUARDRAIL MATERIAL.

TEMPORARY SHORING:

SHORING REQUIRED FOR THE MAINTENANCE OF TRAFFIC WILL BE PAID FOR AS "EXTRA WORK" IN ACCORDANCE WITH SECTION 104-7.

END BENTS:

THE ENGINEER SHALL CHECK THE STRUCTURE END BENT PLANS, DETAILS, AND CROSS-SECTION PRIOR TO SETTING OF THE SLOPE STAKES FOR THE EMBANKMENT OR EXCAVATION APPROACHING A BRIDGE.

UTILITIES:

UTILITY OWNERS ON THIS PROJECT ARE CLEVELAND COUNTY WATER.

ANY RELOCATION OF EXISTING UTILITIES WILL BE ACCOMPLISHED BY OTHERS, EXCEPT AS SHOWN ON THE PLANS.

RIGHT-OF-WAY:

All Right-of-way Markers on this Project shall be placed by others

EFF. 01-15-02
REV. 11-23-04

ROADWAY ENGLISH STANDARD DRAWINGS

The following Roadway Standards as appear in "Roadway Standard Drawings" Highway Design Branch - N. C. Department of Transportation - Raleigh, N. C., Dated January 15, 2002 are applicable to this project and by reference hereby are considered a part of these plans:

STD. NO.	TITLE
DIVISION 2 - EARTHWORK	
200.03	Method of Clearing - Method III
225.02	Guide for Grading Subgrade - Secondary and Local
225.04	Method of Obtaining Superelevation - Two Lane pavement
DIVISION 3 - PIPE CULVERTS	
300.01	Method of Pipe Installation - Method 'A'
DIVISION 5 - SUBGRADE, BASES AND SHOULDERS	
560.01	Method of Shoulder Construction - High Side of Superelevated Curve - Method I
DIVISION 6 - ASPHALT BASES AND PAVEMENTS	
654.01	Pavement Repairs
DIVISION 8 - INCIDENTALS	
820.04	Drain Installation in Shoulder Berm Gutter
840.00	Concrete Base Pad for Drainage Structures
840.25	Anchorage for Frame - Brick & Concrete
840.29	Frames and Narrow Slot Flat Grates
840.35	Traffic Bearing Drop Inlet - for Cast Iron Double Frame and Grates
840.46	Traffic Bearing Precast Drainage Structure
846.01	Concrete Curb, Gutter and Curb & Gutter
862.01	Guardrail Placement
876.01	Rip Rap in Channels
876.02	Guide for Rip Rap at Pipe Outlets
876.04	Drainage Ditches with Class 'B' Rip Rap