


5/28/99

STATE OF NORTH CAROLINA
DIVISION OF HIGHWAYS
ROADWAY SUMMARY OF QUANTITIES FOR CONTRACT - C201185

ItemNumber	Sec #	Quantity	Unit	Description
000100000-N	800	Lump Sum		MOBILIZATION
000800000-E	200	1	ACR	SUPPLEMENTARY CLEARING & GRUBBING
002900000-N	SP	Lump Sum		REINFORCED BRIDGE APPROACH FILL, STATION ***** (23+91.00)
005700000-E	226	500	CY	UNDERCUT EXCAVATION
006300000-N	SP	Lump Sum		GRADING
008000000-E	SP	100	TON	CLASS IV SUBGRADE STABILIZATION
010600000-E	230	12,010	CY	BORROW EXCAVATION
013400000-E	240	540	CY	DRAINAGE DITCH EXCAVATION
019500000-E	265	150	CY	SELECT GRANULAR MATERIAL
019600000-E	270	150	SY	FABRIC FOR SOIL STABILIZATION
024100000-E	SP	320	SY	GENERIC GRADING ITEM TEMPORARY FABRIC WALL
031800000-E	300	21	TON	FOUNDATION CONDITIONING MATERIAL, MINOR STRS
034300000-E	310	40	LF	15" SIDE DRAIN PIPE
037200000-E	310	60	LF	18" RC PIPE CULVERTS, CLASS III
058200000-E	310	96	LF	15" CS PIPE CULVERTS, 0.064" THICK
063600000-E	310	6	EA	*** CS PIPE ELBOWS, ***** THICK (15", 0.064")
099500000-E	340	56	LF	PIPE REMOVAL
122000000-E	545	200	TON	INCIDENTAL STONE BASE
148900000-E	610	1,135	TON	ASPHALT CONC BASE COURSE, TYPE B25.0B
149800000-E	610	605	TON	ASPHALT CONC INTERMEDIATE COURSE, TYPE 119.0B
152500000-E	SP	960	TON	ASPHALT CONC SURFACE COURSE, TYPE SF9.5A
156000000-E	620	140	TON	ASPHALT BINDER FOR PLANT MIX, GRADE PG 64-22
200000000-N	806	14	EA	RIGHT OF WAY MARKERS
ItemNumber	Sec #	Quantity	Unit	Description
202200000-E	815	34	CY	SUBDRAIN EXCAVATION
203300000-E	815	26	CY	SUBDRAIN FINE AGGREGATE
204400000-E	815	150	LF	6" PERFORATED SUBDRAIN PIPE
205500000-E	815	6	EA	6" SUBDRAIN PIPE WYES, TEES, & ELBOWS
206600000-N	815	1	EA	CONCRETE PAD FOR SUBDRAIN PIPE OUTLET
207700000-E	815	6	LF	6" OUTLET PIPE (SUBDRAINS)
228600000-N	840	3	EA	MASONRY DRAINAGE STRUCTURES
236700000-N	840	3	EA	FRAME WITH TWO GRATES, STD 840.29
255600000-E	846	465	LF	SHOULDER BERM GUTTER
303000000-E	862	862.5	LF	STEEL BM GUARDRAIL
315000000-N	862	5	EA	ADDITIONAL GUARDRAIL POSTS
321500000-N	862	4	EA	GUARDRAIL ANCHOR UNITS, TYPE III
327000000-N	SP	4	EA	GUARDRAIL ANCHOR UNITS, TYPE 350
364900000-E	876	105	TON	PLAIN RIP RAP, CLASS B
365600000-E	876	995	SY	FILTER FABRIC FOR DRAINAGE
365900000-N	SP	2	EA	PREFORMED SCOUR HOLES WITH LEVEL SPREADER APRON
441200000-E	SP	90	SF	WORK ZONE SIGNS (STATIONARY)
441210000-E	SP	192	SF	WORK ZONE SIGNS (PORTABLE)
441220000-E	SP	20	SF	WORK ZONE SIGNS (BARRICADE MOUNTED)
443000000-N	1130	40	EA	DRUMS
443500000-N	1135	30	EA	CONES
444610000-E	SP	48	LF	BARRICADES (TYPE III)
445500000-N	1150	100	MD	FLAGGER
446500000-N	1160	4	EA	TEMPORARY CRASH CUSHIONS
448500000-E	1170	1,870	LF	PORTABLE CONCRETE BARRIER
449000000-E	1170	40	LF	PORTABLE CONCRETE BARRIER (ANCHORED)

ItemNumber	Sec #	Quantity	Unit	Description
465000000-N	1251	71	EA	TEMPORARY RAISED PAVEMENT MARKERS
468500000-E	1205	4,400	LF	THERMOPLASTIC PAVEMENT MARKING LINES (4", 90 MILS)
468600000-E	1205	4,400	LF	THERMOPLASTIC PAVEMENT MARKING LINES (4", 120 MILS)
481000000-E	1205	22,000	LF	PAINT PAVEMENT MARKING LINES (4")
490000000-N	1252	30	EA	PERMANENT RAISED PAVEMENT MARKERS
600000000-E	1605	1,450	LF	TEMPORARY SILT FENCE
600600000-E	1610	75	TON	STONE FOR EROSION CONTROL, CLASS A
600900000-E	1610	400	TON	STONE FOR EROSION CONTROL, CLASS B
601200000-E	1610	400	TON	SEDIMENT CONTROL STONE
601500000-E	1615	5.5	ACR	TEMPORARY MULCHING
601800000-E	1620	200	LB	SEED FOR TEMPORARY SEEDING
602100000-E	1620	0.75	TON	FERTILIZER FOR TEMPORARY SEEDING
602400000-E	1622	80	LF	TEMPORARY SLOPE DRAINS
602700000-N	1622	2	EA	INLET PROTECTION AT TEMPORARY SLOPE DRAINS
602900000-E	SP	350	LF	SAFETY FENCE
603000000-E	1630	3,250	CY	SILT EXCAVATION
603600000-E	1631	2,400	SY	MATting FOR EROSION CONTROL
604200000-E	1632	50	LF	1/4" HARDWARE CLOTH
607000000-N	SP	12	EA	SPECIAL STILLING BASINS
608400000-E	1660	5.5	ACR	SEEDING & MULCHING
608700000-E	1660	3.5	ACR	MOWING
609000000-E	1661	50	LB	SEED FOR REPAIR SEEDING
609300000-E	1661	0.25	TON	FERTILIZER FOR REPAIR SEEDING
609600000-E	1662	125	LB	SEED FOR SUPPLEMENTAL SEEDING
610800000-E	1665	4	TON	FERTILIZER TOPDRESSING
611400000-N	SP	2	HR	SPECIALIZED HAND MOWING
611700000-N	1675	8	EA	RESPONSE FOR EROSION CONTROL
612300000-E	1670	0.5	ACR	REFORESTATION

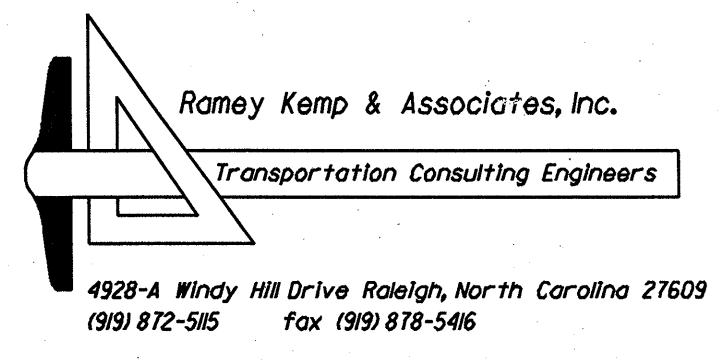

Ramey Kemp & Associates, Inc.
Transportation Consulting Engineers
4928-A Windy Hill Drive Raleigh, North Carolina 27609
(919) 872-5115 Fax (919) 878-5416