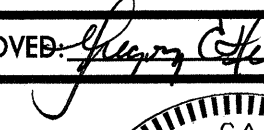
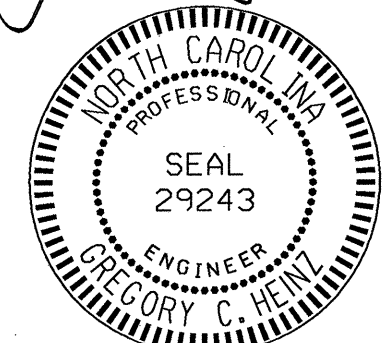
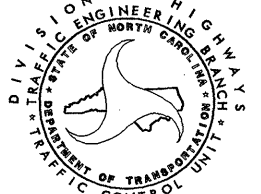


FINAL PAVEMENT MARKING SCHEDULE

SYMBOL	DESCRIPTION	PAY ITEM QUANTITY BREAKDOWN	TOTAL QUANTITY
FINAL PAVEMENT MARKINGS			
		THERMOPLASTIC (4", 90 MILS)	
TB	YELLOW EDGELINE (2X)	32,950 LF	TOTAL 32,950 LF
		THERMOPLASTIC (4", 90 MILS)	
TC	10 FT. WHITE SKIP (2X)	42,334 LF	
TD	2 FT. WHITE MINISKIP (2X)	11,660 LF	
TE	WHITE SOLID LANE LINE/EDGELINE (2X)	20,500 LF	
TI	YELLOW DOUBLE CENTER (2X)	3774 LF	
TF	2 FT. YELLOW MINISKIP (2X)	1034 LF	TOTAL 115,132 LF
		THERMOPLASTIC (24", 120 MILS)	
T2	WHITE STOPBAR (2X)	1538 LF	TOTAL 1538 LF
		THERMOPLASTIC PAVEMENT MARKING CHARACTERS (120 MILS)	
UI	ALPHANUMERIC CHAR. (2X)	64 EA	TOTAL 64 EA
		THERMOPLASTIC PAVEMENT MARKING SYMBOLS (90 MILS)	
UA	LEFT TURN ARROW (2X)	102 EA	
UB	RIGHT TURN ARROW (2X)	66 EA	
UC	STRAIGHT ARROW (2X)	46 EA	
UE	COMBO. STRAIGHT/RIGHT (2X)	10 EA	TOTAL 226 EA
		MARKERS	
		SNOWPLOWABLE RAISED PAVEMENT MARKERS	
ME	YELLOW & YELLOW	99 EA	
MF	CRYSTAL & RED	476 EA	TOTAL 575 EA

G:\projects\20344\BR-095_Bldg\Design\U4719_RDY_PM-01.dgn
 C:\NC\PLOTS\XEROX8825\X34\U4719_RDY_PM-01.plt
 10/26/2005

PB PARSONS BRINCKERHOFF
 909 AVIATION PARKWAY
 SUITE 1500
 MORRISVILLE, NC 27560

APPROVED: 	DATE: 10-27-05	PERMANENT PAVEMENT MARKING PLAN		
	SCALE: NONE			
	DATE: 06/02/05			REVISIONS
	DWG. BY: JGJ			
	DESIGN BY: BPS			
REVIEWED BY: GH		CARD FILE	U4719_RDY_PM_01	